



FOODSERVICE EQUIPMENT PRICE LIST

EXPORT US\$ – July 1, 2022





People who serve,
products that solve.®

Export Price List

How to Order

To ensure prompt and accurate processing of your order, please provide the following information:

1. Model number, voltage, hertz (50 or 60), phase, whether CE mark is required.
2. Specify options and accessories as required. Options must be specified at time of purchase and are not retrofittable.
3. Consult factory when ordering equipment for special applications.
4. E-mail orders are acceptable and do not require confirmation.
5. See Resources section in back of book for more information.

**ALL WATT RATINGS ARE
NOMINAL. ACTUAL WATTAGE
MAY VARY. CONSULT FACTORY
FOR MORE INFORMATION.**

Email orders to:
intlsales@hatcocorp.com

Email inquiries and requests to:
support@hatcocorp.com

Hatco Corporation
P.O. Box 340500
Milwaukee, WI 53234-0500 U.S.A.
Telephone: (414) 671-6350
www.hatcocorp.com

EX WORKS
Sturgeon Bay, WI 54235 U.S.A.

Who We Are

Since 1950, Hatco has been a leader in creating innovative ideas for the foodservice industry: bold innovations in equipment that improves efficiency, reliability and profits. Products are designed and built to handle the rugged demands of today's foodservice operations. Hatco is a company dedicated to exceptional customer service and quality engineered equipment offering maximum performance.

We Pride Ourselves On Being Employee Owned

The company was started by Gordon and LaReine Hatch in 1950 and was led by their son, David, beginning in 1990. In 2004, Hatco Corporation began the journey of employee ownership, and in 2007, a monumental event in Hatco history occurred: the employees assumed 100% ownership from David Hatch! Hatco still remains a family corporation - only now our family is larger. The employee owners are driven by the spirit of ownership and motivated by the empowerment of ownership.

Equipment

Booster Water Heaters
Built-In Heated Shelves
Built-In Warmers
Carving Stations
Cold Shelves
Cold Wells
Decorative Lamps
Display Lights
Drawer Warmers
Frost Tops

Fry Stations
Heated Shelves
Heated Wells
Holding and Display Cabinets
Hot/Cold Shelves
Ice Wells
Induction
Light Cooking Equipment
Merchandising Warmers
Nacho Chip Warmers

Pizza Warmers
Portable Warmers
Refrigerated Wells
Rethermalizers
Sanitizing Sink Heaters
Snack System
Soup Stations
Strip Heaters
Toasters

Locations



Milwaukee - Corporate Office
635 South 28th St. | Milwaukee, WI 53215
414-671-6350



Sturgeon Bay - Manufacturing Facility
208 East Deck Street | Sturgeon Bay, WI 54235
920-743-5595



Let's Get Social





TABLE OF CONTENTS

WELLS	2-35	DRAWER WARMERS	120-125
DECORATIVE LAMPS & DISPLAY LIGHTS	36-45	MERCHANDISERS	126-140
STRIP HEATERS	46-74	HOLDING & DISPLAY CABINETS	141-158
FRY STATIONS	75-80	TOASTERS	159-165
CARVING STATIONS	81-83	INDUCTION EQUIPMENT	166-172
PORTABLES	84-96	LIGHT COOKING EQUIPMENT	173-176
BUILT-INS	97-119	WATER HEATERS	177-188

3CS	178
C	180-181
CDW	125
CLED	45
CSBF, CSBFR, CSBFX	104-105
CSSB, CSSBR CSSBX	101
CSSBF, CSSBFR, CSSBFX	102-103
CSU, CSUR, CSUX	106-107
CWB, CWB-S	7-9, 13
CWBR, CWBR-S, CWBX, CWBX-S	10-13
DCS	82
DL, DLL, DLH	37-42
FDWD-1-MN	152
FDWD	143, 146-147
FR	179
FS2HAC	158
FSD, FSDT	144-147
FSHAC	158
FSHC-5W, -7W	154
FSHC-6W	156
FSHC-7	157
FSHC-12W, -17W	155
FST-1-MN	152
FTB, FTB-S	14-15
FTBR, FTBX	16-17
FWM	175
GR, GRH	53-54
GR2A, GR2AH	63, 65
GR2A-xxD, GR2AH-xxD	66, 68
GR2AL, GR2AHL	64-65
GR2AL-xxD, GR2AHL-xxD	67-68
GR2BW	95-96
GR2S	89
GR2SDH, GR2SDH-xxD	131-132
GR2SDS, GR2SDS-xxD	131-132
GR3SDS-xxDCT, GR3SDS-xxTCT	135
GR5A, GR5AH	49

GR5AL, GR5AHL	50-51
GRA, GRAH	52, 54
GRA-xxD, GRAH-xxD	55, 57
GRAL, GRAHL	53-54
GRAL-xxD, GRAHL-xxD	56-57
GRAIH, GRAIHL	60, 62
GRAIH-xxD, GRAIHL-xxD	61-62
GR-B	76
GRBW	95-96
GRCD, GRCDH	137-138
GRCMW	136
GRCSC, GRCSC/LH	83
GRFF, GRFFL, GRFFB, GRFFBL	76-77
GRFHS	78-79
GRFS	78-79
GRHD, GRHDH	139-140
GRHW	94
GRN, GRNH	58-59
GRPWS	127
GRS	87-89
GRS2G	142
GRSB	116-117
GRSBF	118-119
GRSDH, GRSDH-xxD	129-130
GRSDS, GRSDS-xxD	129-130
GRSDS/H	128
GRSR	86
GRSS	92
GRSSB	113
GRSSR	90-91
HGB	93
HGBB, HGBBH	114-115
HCSBF, HCSBFR, HCSBFX	111-112
HCSSB, HCSSBR, HCSSBX	108
HCSBF, HCSSBFR, HCSSBFX	109-110
HDW	122-124
HDWTC	121

HL	43
HL5	44
HSBF-GL, -HC, -SS	98-100
HW	3
HWB	26-28, 34-35
HWB-xQT, HWBI-xQT	29-30, 34-35
HWBI, HWBI43	18-20, 23, 34-35
HWBI-S	21-23, 34-35
HWBRN	31-32, 34-35
HWBRT	31-32, 34-35
HWBRN-xQT	33-35
HWBRT-xQT	33-35
HXMH, HXMH-xxD	133-134
HXMS, HXMS-xxD	133-134
IHDCH	148-149
IRNG-PC1, -PB1	167-168
IRNG-PC2, -PB2	169-170
IWRM-CD1, -B1	171-172
ITQ	160
IWB, IWB-S	4-6
LW	85
MDW	151
MPWS	80
PFST	153
RMB	74
S	182-183
SAL	176
SNACK	174
TK	164-165
TQ	162-163, 165
TQ3	161
UGA, UGAH	69, 71
UGA-xxD, UGAH-xxD	70-71
UGAL, UGAHL	69, 71
UGAL-xxD, UGAHL-xxD	70-71
UGFF, UGFFL, UGFFB, UGFFBL	76-77
WFST	150

Wells

Cafeterias • Buffets
Convenience Stores • Supermarkets & Delis
Restaurants & Cafés • Clubs & Bars



HW-FUL with accessory pan support bars (food pans, ladles and lids not available) *pg. 3*



IWB-6 with accessory food pan (sneeze guards and bowls not available) *pg. 4*



CWB-3 with accessory food pans *pg. 8*



CWB-S4 with optional **CWB-S4SLANT**, accessory pan support bars and food pans *pg. 9*



FTB-3 with accessory sheet pans *pg. 15*



HWBI-3MA with accessory food pans *pg. 19*



HWBI-3 with accessory heated well covers (one **1COVFUL-GGRAN** and one **2COVFUL-GGRAN**) *pg. 19, 23*



HWBI-S4MA with accessory food pans (shown with **GRAH-72**, sneeze guards not available) *pg. 22*



HWBRT-7QTD and **HWBRT-11QTD** with accessory food pans and mounting kit (also shown **HWB-43D** and **HWBI-FULD**) *pg. 26 – 33*

Countertop Heated Wells

Providing versatility and reliability, Hatco Countertop Heated Wells hold food hot and fresh in either a wet or dry operation with an adjustable temperature control. The HW-FUL unit can hold a full-size pan or three third-size pans.

- Controls feature a separate lighted On/Off rocker switch and adjustable temperature dial
- May be used dry but performs best when used with water. Dry indicator light informs user to add water
- Thicker .8 mm stainless steel pan with a stainless steel housing (aluminized steel bottom)
- Pan edge offset to help keep condensation from dripping onto countertop surface

HW-FUL with accessory food pans and pan support bar



HOLD ONLY COUNTERTOPS – FULL-SIZE AND 4/3-SIZE

Model	Dimensions (W x D x H)	Voltage	Watts	Plug	Ship Weight	List Price
Standard Watt						
HW-FUL	370 x 607 x 250 mm	220 230 [†]	1100 1200	BS 1363 BS 1363, CEE 7/7, AS 3112, CCC	13 kg	\$607

[†] 230V available with CE Mark, at no added charge.

All Hold Only Countertop Heated Well Models Feature:

Voltage: Single phase only.

Cord Location: Bottom left corner on back of unit.

Models Shipped with: Stainless steel pan, stainless steel (aluminized stainless steel bottom) housing with a metal sheathed heating element, a power On/Off switch, a temperature control, a dry unit indicator light and a 1829 mm cord with plug attached.

ACCESSORIES (available for purchase at any time)

HW-2-7QT	Adapter to convert warmer to hold two 7-Liter Inserts	\$93
HW-3-4QT	Adapter to convert warmer to hold three 4-Liter Inserts	93
HW12BAR	305 mm Pan Support for Countertop Wells	20
HW20BAR	508 mm Pan Support for Countertop Wells	24

ADDITIONAL PAN AND LID ACCESSORIES – PAGES 34-35

Heated Well **HW - x x x**
 FUL = Full-Size Pan



Drop-In Ice Wells

Hatco Drop-In Ice Wells provide all the quality features of our Refrigerated Drop-Ins, but without any refrigeration or electrical components. These ice-cooled, insulated units can hold prechilled food products at preferred serving temperatures. Ideal for salad bars, cold buffets and chilled beverage bars. Pan dividers give you greater flexibility in your variety of featured food products.

- Full-size, insulated, top mount wells available to hold 1- to 6-pan configurations
- Optimal insulation on sides and bottom to ensure better cold retention and cost savings
- Bezel design allows clear viewing and easy food access
- Larger 1" NPT (National Pipe Thread) brass drain with flat screen simplifies cleaning
- False bottom accessory conveniently holds ice above drain for ease of draining
- Matches the Hatco line of Wells for a fully integrated look



IWB-6
with an accessory food pan (bowls not available) and an optional gasket



IWB-2 with slant option **IWB-2SLANT**

DROP-IN INSULATED ICE WELLS

Model	Dimensions W x D x H	Ship Weight	List Price
IWB-1	483 x 686 x 305 mm	28 kg	\$1833
IWB-2	813 x 686 x 305 mm	38 kg	2111
IWB-3	1143 x 686 x 305 mm	46 kg	2446
IWB-4	1473 x 686 x 305 mm	65 kg	2835
IWB-5	1803 x 686 x 305 mm	50 kg	3281
IWB-6	2134 x 686 x 305 mm	82 kg	3784

CE Mark not available.

OPTIONS (available at time of purchase only)

Slant Options –

IWB-1SLANT	Slant Option for IWB-1	\$269
IWB-2SLANT	Slant Option for IWB-2	290
IWB-3SLANT	Slant Option for IWB-3	311
IWB-4SLANT	Slant Option for IWB-4	332
IWB-5SLANT	Slant Option for IWB-5	353
IWB-6SLANT	Slant Option for IWB-6	374


Gasket Options –

BEZELGASKET-1	Factory installed for IWB-1	\$ 87
BEZELGASKET-2	Factory installed for IWB-2	87
BEZELGASKET-3	Factory installed for IWB-3	114
BEZELGASKET-4	Factory installed for IWB-4	114
BEZELGASKET-5	Factory installed for IWB-5	122
BEZELGASKET-6	Factory installed for IWB-6	122

ACCESSORIES – PAGE 6



Slant Option for:

IWB-1, -2, -3, -4, -5, -6

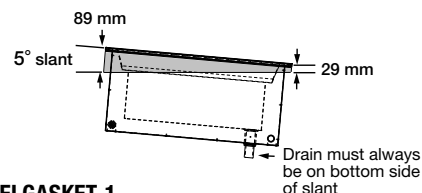


BEZELGASKET-1

Factory installed option (eliminates the need for silicone or other sealants)



DROP-IN ICE WELL COUNTERTOP CUT-OUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
IWB-1	435 mm	457 mm	640 mm	660 mm
IWB-2	765 mm	787 mm	640 mm	660 mm
IWB-3	1095 mm	1118 mm	640 mm	660 mm
IWB-4	1426 mm	1448 mm	640 mm	660 mm
IWB-5	1756 mm	1778 mm	640 mm	660 mm
IWB-6	2086 mm	2108 mm	640 mm	660 mm

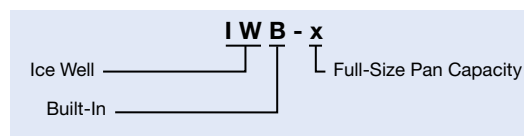

Drop-In Slim Ice Wells

Hatco Drop-In Ice Slim Wells provide all the quality features of our Refrigerated Drop-Ins, but without any refrigeration or electrical components. Now available in a slim configuration providing customers with a complete well within easy reach, regardless of the sneeze guards.

Ideal for salad bars, cold buffets and chilled beverage bars. Pan dividers give you greater flexibility in your variety of featured food products.

- Holds 1- to 4-full-size pan configurations, but placed lengthwise
- Optimal insulation on sides and bottom to ensure better cold retention and cost savings
- Bezel design allows clear viewing and easy food access
- Larger 1" NPT (National Pipe Thread) brass drain with flat screen simplifies cleaning
- False bottom accessory conveniently holds ice above drain for ease of draining
- Matches the Hatco line of Wells for a fully integrated look

IWB-S4
with optional
slant kit



IWB-S2



DROP-IN INSULATED SLIM ICE WELLS

Model	Dimensions W x D x H	Ship Weight	List Price
IWB-S1	687 x 481 x 306 mm	26 kg	\$1903
IWB-S2	1222 x 481 x 306 mm	48 kg	2181
IWB-S3	1757 x 481 x 306 mm	66 kg	2516
IWB-S4	2292 x 481 x 306 mm	92 kg	2905

CE Mark not available.

OPTIONS (available at time of purchase only)

Slant Options –



IWB-S1SLANT	Slant Option for IWB-S1	\$269
IWB-S2SLANT	Slant Option for IWB-S2	290
IWB-S3SLANT	Slant Option for IWB-S3	311
IWB-S4SLANT	Slant Option for IWB-S4	332

Gasket Options –


BEZELGASKET-S1	Factory installed for IWB-S1	\$ 87
BEZELGASKET-S2	Factory installed for IWB-S2	87
BEZELGASKET-S3	Factory installed for IWB-S3	114
BEZELGASKET-S4	Factory installed for IWB-S4	114

ACCESSORIES – PAGE 6

Slant Option for: IWB-S1, -S2, -S3, -S4




BEZELGASKET-S1
Factory installed option
(eliminates the need for silicone
or other sealants)



DROP-IN SLIM ICE WELLS COUNTERTOP CUT-OUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
IWB-S1	641 mm	662 mm	433 mm	456 mm
IWB-S2	1175 mm	1196 mm	433 mm	456 mm
IWB-S3	1710 mm	1731 mm	433 mm	456 mm
IWB-S4	2245 mm	2266 mm	433 mm	456 mm





Drop-In Ice Well Accessories *(available for purchase at any time)*



IWB-6
with accessory food pan
(bowls not available)

PANS – TRIVETS *(available for purchase at any time)*


ST PAN 1/3	Third-Size Stainless Steel Pan – 324 W x 175 D x 64 H mm	\$ 64
ST PAN 1/2	Half-Size Stainless Steel Pan – 324 W x 264 D x 64 H mm	74
ST PAN 2	Full-Size Stainless Steel Pan – 324 W x 527 D x 64 H mm	88
ST PAN 4	Full-Size Stainless Steel Pan – 324 W x 527 D x 102 H mm	110
HDW 6" PAN	Full-Size Stainless Steel Pan – 324 W x 527 D x 152 H mm	120

Wire Trivets Stainless –

TRIVET (1/2)SS	Half-Size – 259 W x 194 D mm	\$119
TRIVET SS	Full-Size – 259 W x 457 D mm	165

Support Bars

Choose the appropriate
kit for IWB or
CWB series

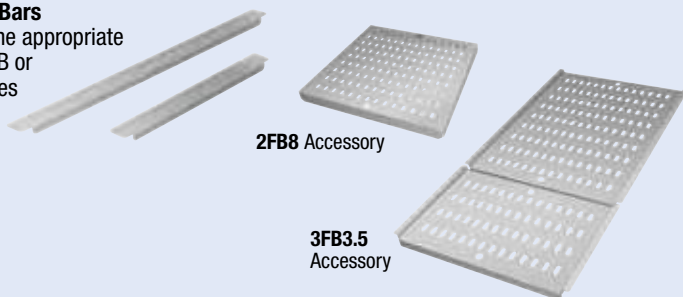

SUPPORT BARS – FALSE BOTTOMS *(available for purchase at any time)*

Bars –

CWB12BAR	305 mm Pan Support Bar for Drop-In Ice or Refrigerated Wells	\$22
CWB20BAR	508 mm Pan Support Bar for Drop-In Ice or Refrigerated Wells	26

False Bottoms for Ice Wells (allows for 3½" of ice and sits on ledge of well) –

1FB3.5	For IWB-1 models (includes one 1-pan Insert)	\$102
2FB3.5	For IWB-2 models (includes one 2-pan Insert)	187
3FB3.5	For IWB-3 models (includes one 1-pan Insert and one 2-pan Insert)	272
4FB3.5	For IWB-4 models (includes two 2-pan Insert)	357
5FB3.5	For IWB-5 models (includes one 1-pan Insert and two 2-pan Inserts)	442
6FB3.5	For IWB-6 models (includes three 2-pan Inserts)	527

False Bottoms for Ice Wells (allows for 8" of ice and sits on bottom of well) –

1FB8	For IWB-1 models (includes one 1-pan Insert)	\$102
2FB8	For IWB-2 models (includes one 2-pan Insert)	187
3FB8	For IWB-3 models (includes one 1-pan Insert and one 2-pan Insert)	272
4FB8	For IWB-4 models (includes two 2-pan Insert)	357
5FB8	For IWB-5 models (includes one 1-pan Insert and two 2-pan Inserts)	442
6FB8	For IWB-6 models (includes three 2-pan Inserts)	527

False Bottoms for Slim Ice Wells (allows for 3½" of ice and sits on ledge of well) –


1FBS3.5	For IWB-S1 models (includes one 1-pan Insert)	\$102
2FBS3.5	For IWB-S2 models (includes one 2-pan Insert)	187
3FBS3.5	For IWB-S3 models (includes one 1-pan Insert and one 2-pan Insert)	272
4FBS3.5	For IWB-S4 models (includes two 2-pan Inserts)	357

False Bottoms for Slim Ice Wells (allows for 8" of ice and sits on bottom of well) –

1FBS8	For IWB-S1 models (includes one 1-pan Insert)	\$102
2FBS8	For IWB-S2 models (includes one 2-pan Insert)	187
3FBS8	For IWB-S3 models (includes one 1-pan Insert and one 2-pan Insert)	272
4FBS8	For IWB-S4 models (includes two 2-pan Inserts)	357



**TRIVET
(1/2)SS**




False Bottom Accessories

1-part, 2-part, 3-part(s)
depending on pan size

For Drop-In Ice Wells


1, 2, 3, 4, 5 or 6FB3.5

False Bottom hangs from
pan shelf - 89 mm H for ice



1, 2, 3, 4, 5 or 6FB8


False Bottom placed on bottom
of unit - 203 mm H for ice



For Drop-In Slim Ice Wells


1, 2, 3 or 4FBS3.5

False Bottom hangs from
pan shelf - 89 mm H for ice



1, 2, 3 or 4FBS8

False Bottom placed on bottom
of unit - allows for 203 mm of ice



Refrigerated Drop-In Wells Ordering Instructions

Cutaway of **CWB-6**
with accessory food pans

NSF 7 Component
approved cold wall
construction keeps food
product cold without
drying it out

A Refrigerated Well when
combined with accessory
support bars can house a
variety of pans – full-size,
half-size or third-size –
showcasing a variety of
your food products

The unique top bezel
design also provides easy
access and clear views

The greater surface area of
the angled wall and the
placement of the coils allow
cold air to more effectively
blanket your food product

Larger brass drain ensures
easy cleaning

Exclusive flat screen design
ensures that pans sit flush

Adjustable condensing unit can rotate
90° or 180° on all models for easy venting
adjustments, flexible installation and service

For the CWB-4, -5 or -6 and CWB-S2, -S3
or S4 models the mobile condensing unit
can be mounted in several positions
between the center of the well and the
evaporator coil connections

The well cavity
ensures energy
efficiency with
environmentally-
friendly insulation
used throughout

Long, flexible refrigerant lines
for easy pull-out and service

Easy-to-service
pull-out design

Auto-defrost activated through
an advanced electronic controller
programmed at the customer location

Please specify the following with each order:

- Desired Voltage:**
220-240V
 - Number of Drop-In Wells Required:**
 - Standard configuration**
1-, 2-, 3-, 4-, 5- or 6-pan as rectangular,
full-size (305 mm x 508 mm)
 - Slim configuration**
S1-, S2-, S3- or S4-pan as rectangular,
full-size (305 mm x 508 mm) but placed lengthwise
 - Depth of Model:** Standard configuration (686 mm D)
or Slim configuration (481 mm D)
 - Agency – NSF 7 Component**
 - Electronic Control Assembly** can be mounted
on either side of the Condensing Unit or remotely
mounted up to 1219 mm from the unit
(cannot be mounted over the Condensing Unit)
- Option**
- Slant Option** for CWB-1, -2, -3, -4, -5, -6
or CWB-S1, -S2, -S3, -S4
 - Gasket Option** for CWB-1, -2, -3, -4, -5, -6
or CWB-S1, -S2, -S3, -S4

Accessories

- Pan Support Bars:** 305 mm x 508 mm
- Stainless Steel Pans:**
 - Third-size at 64 mm deep
(324 W x 175 D x 64 H mm)
 - Half-size at 64 mm deep
(324 W x 264 D x 64 H mm)
 - Full-size at 64 mm deep
(324 W x 527 D x 64 H mm)
 - Full-size at 102 mm deep
(324 W x 527 D x 102 H mm)
 - Full-size at 152 mm deep
(324 W x 527 D x 152 H mm)
- Perforated False Bottom**

From below, you can see the condenser unit after
being pulled out by the technician, allowing easy
access and visibility to all service components



The sight glass gives an inside look
into a usually closed system to determine if the
refrigerant is low or if there is water in the system

ACCESSORIES – PAGE 13

REFRIGERATED DROP-IN WELLS COUNTERTOP CUT-OUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
CWB-1	435 mm	457 mm	640 mm	660 mm
CWB-2	765 mm	787 mm	640 mm	660 mm
CWB-3	1095 mm	1118 mm	640 mm	660 mm
CWB-4	1426 mm	1448 mm	640 mm	660 mm
CWB-5	1756 mm	1778 mm	640 mm	660 mm
CWB-6	2086 mm	2108 mm	640 mm	660 mm
Slim Series				
CWB-S1	641 mm	662 mm	433 mm	456 mm
CWB-S2	1175 mm	1196 mm	433 mm	456 mm
CWB-S3	1710 mm	1731 mm	433 mm	456 mm
CWB-S4	2245 mm	2266 mm	433 mm	456 mm



Refrigerated Drop-In Wells


Hatco's Refrigerated Drop-In Well is a full-size unit that blankets your pre-chilled food product to retain optimum freshness and taste in one efficient and easy operation – a winner for your foodservice operation.



CWB-3 with accessory food pans and pan support bars

- Full-size, insulated wells available in 1- to 6-pan configurations
- NSF 7 Component approved cold wall construction keeps food cold without drying it out
- Electronic control assembly can be mounted on either side of the condensing unit or remotely mounted up to 1219 mm
- Adjustable condensing unit can be rotated 90° or 180° on all models for easy venting and flexibility at installation

- Mobile condensing unit may be moved in 165 mm increments between the center line and the factory-installed compressor location in the 4-, 5- and 6-pan units at installation
- Auto-defrost is activated through an advanced electronic controller programmed at the customer location
- Optimal insulation on sides and bottom to ensure better cold retention. Environmentally-friendly insulation used throughout
- Easy serviceability with a sight glass, service valves, dryer and a receiver. Long, flexible refrigerant line (ability to pull out condensing unit) for service
- 1" NPT (National Pipe Thread) brass drain simplifies cleaning

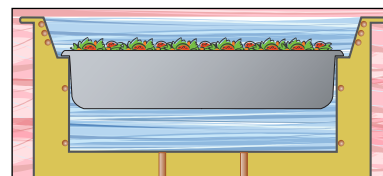

The unique angled inside wall design provides easy access and clear views. The greater surface area of the angled wall and the placement of the coils allow cold air to more effectively blanket your food product.

DROP-IN FULL-SIZE INSULATED RECTANGULAR WELLS

Model	Dimensions W x D	Price List
CWB-1	483 x 686 mm	\$7427
CWB-2	813 x 686 mm	7888
CWB-3	1143 x 686 mm	8438
CWB-4	1473 x 686 mm	9022
CWB-5	1803 x 686 mm	9752
CWB-6	2134 x 686 mm	10327

CE Mark not available.


All Refrigerated Drop-In Well Models Feature:

Voltage: 220-240V, single phase.

Models Shipped with: Electronic temperature control, pan support bars for full-size pans, condensing unit (can be rotated), auto-defrost, sight glass, service valves and dryer.

Consult Factory for: Height dimensions, HP, watts, shipping and refrigerant specifications.

CWB-2
with slant option
CWB-2SLANT

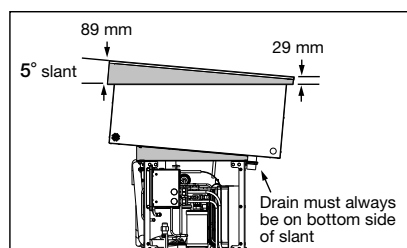

Slant Option for:
CWB-1, -2, -3, -4, -5, -6


OPTIONS (available at time of purchase only)

Slant Options –



CWB-1SLANT	Slant Option for CWB-1	\$357
CWB-2SLANT	Slant Option for CWB-2	378
CWB-3SLANT	Slant Option for CWB-3	399
CWB-4SLANT	Slant Option for CWB-4	420
CWB-5SLANT	Slant Option for CWB-5	441
CWB-6SLANT	Slant Option for CWB-6	462

Gasket Options –

BEZELGASKET-1	Factory installed for CWB-1	\$ 87
BEZELGASKET-2	Factory installed for CWB-2	87
BEZELGASKET-3	Factory installed for CWB-3	114
BEZELGASKET-4	Factory installed for CWB-4	114
BEZELGASKET-5	Factory installed for CWB-5	122
BEZELGASKET-6	Factory installed for CWB-6	122



BEZELGASKET-1
Factory installed option (eliminates the need for silicone or other sealants)



COUNTERTOP CUT-OUT DIMENSIONS – PAGE 7
ACCESSORIES – PAGE 13

Refrigerated Slim Drop-In Wells

Hatco's Refrigerated Slim Drop-In Well is a full-size unit that blankets your pre-chilled food product to retain optimum freshness and taste in one efficient and easy operation – but placed lengthwise. This provides customers with a complete cold well within easy reach, regardless of the sneeze guards.

- Insulated wells available in 1- to 4-full-size pan configurations
- NSF 7 Component approved cold wall construction keeps food product cold without drying it out
- Adjustable condensing unit can rotate 180° on all models for easy venting adjustments and flexibility at installation
- Mobile condensing unit can be moved in 123 mm increments from left end to center on the 2-, 3- and 4-pan units at installation (CWB-S1 is rotatable only)
- Easy serviceability with a sight glass, service valves, dryer/filter and a receiver. Long, flexible refrigerant line (ability to pull out condensing unit) for service
- Auto-defrost is activated through an advanced electronic controller programmed at customer location
- Optimal insulation on sides and bottom ensure better cold retention
- 1" NPT (National Pipe Thread) brass drain simplifies cleaning

CWB-S2
with accessory
(hotel) food pans
and additional pan
support bars



CWB-S4
with optional slant kit,
accessory (hotel) food
pans and additional pan
support bars

REFRIGERATED SLIM DROP-IN WELLS

Model	Dimensions W x D	List Price
CWB-S1	687 x 481 mm	\$ 7427
CWB-S2	1222 x 481 mm	8109
CWB-S3	1757 x 481 mm	9304
CWB-S4	2292 x 481 mm	11130

CE Mark not available.


All Refrigerated Slim Drop-In Well Models Feature:

Voltage: 220-240V, single phase.

Models Shipped with: Electronic temperature control, pan support bars for full-size pans, condensing unit (can be rotated 180°), auto-defrost, sight glass, service valves and dryer.

Consult Factory for: height dimensions, HP, watts, shipping and refrigerant specifications.

Slant Option for: CWB-S1, -S2, -S3, -S4

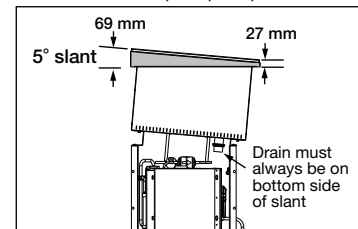

OPTIONS (available at time of purchase only)


Slant Options –

CWB-S1SLANT	Slant Option for CWB-S1	\$297
CWB-S2SLANT	Slant Option for CWB-S2	318
CWB-S3SLANT	Slant Option for CWB-S3	339
CWB-S4SLANT	Slant Option for CWB-S4	360

Gasket Options –



BEZELGASKET-S1	Factory installed for CWB-S1	\$ 87
BEZELGASKET-S2	Factory installed for CWB-S2	87
BEZELGASKET-S3	Factory installed for CWB-S3	114
BEZELGASKET-S4	Factory installed for CWB-S4	114

COUNTERTOP CUT-OUT DIMENSIONS – PAGE 7 ACCESSORIES – PAGE 13



BEZELGASKET-S1

Factory installed option
(eliminates the need for silicone
or other sealants)





July 1, 2022

Export Price List

Remote Refrigerated Drop-In Wells Ordering Instructions

Cutaway of **CWBR-6**
with accessory food pans

Cold Well with:
Temperature Probe

NSF 7 Component approved cold wall
construction keeps food product cold
without drying it out

A Refrigerated Well can
house a variety of pans –
full-size, half-size or third-
size – showcasing a variety
of your food products

The unique top bezel design
also provides easy access
and clear views

The greater surface area of
the angled wall and the
placement of the coils allow
cold air to more effectively blanket
your food product

Larger brass drain ensures
easy cleaning
Exclusive flat screen design
ensures that pans sit flush

Auto-defrost
activated through
an advanced
electronic controller
programmed at the
customer location



Please specify the following with each order:

- Desired Voltage:**
220-240V
- Number of Drop-In Wells Required:**
 - Standard configuration**
1-, 2-, 3-, 4-, 5- or 6-pan as rectangular,
full-size (305 mm x 508 mm)
 - Slim configuration**
S1-, S2-, S3- or -S4-pan as rectangular,
full-size (305 mm x 508 mm) but
placed lengthwise
- Depth of Model:** Standard configuration (686 mm D)
or Slim configuration (481 mm D)
- Remote Refrigeration**
NOTE: Shipped loose: Cold Well
with Temperature Probe, Control Panel
(Probe Wires are 2.74 meters and
a TXV Valve)
 - CWBR** with a Condensing Unit (shipped loose) –
may be field mounted up to 15 meters of tubing
from the unit
 - CWBX** without a Condensing Unit
(Solenoid Valve attached to Cold Well)
- Agency** – NSF 7 Component



CWBR: with a Condensing Unit
CWBX: without a Condensing Unit

Options

- Slant Option** for CWBR- or CWBX-1, -2, -3,
-4, -5, and -6 or -S1, -S2, -S3, -S4
- Gasket Option** for CWBR- or CWBX-1, -2, -3, -4,
-5, -6 or S1, -S2, -S3, -S4

Accessories

- Pan Support Bars:** 305 mm or 508 mm
- Stainless Steel Pans:**
 - Third-size at 64 mm deep
(324 W x 175 D x 64 H mm)
 - Half-size at 64 mm deep
(324 W x 264 D x 64 H mm)

- Full-size at 64 mm deep
(324 W x 527 D x 64 H mm)
- Full-size at 102 mm deep
(324 W x 527 D x 102 H mm)
- Full-size at 152 mm deep
(324 W x 527 D x 152 H mm)

3. Perforated False Bottom

4. Trivets:

- Half-size
259 W x 194 D mm
- Full-size
259 W x 457 D mm

REMOTE REFRIGERATED DROP-IN WELLS COUNTERTOP CUT-OUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
CWBR-1, CWBX-1	435 mm	457 mm	640 mm	660 mm
CWBR-2, CWBX-2	765 mm	787 mm	640 mm	660 mm
CWBR-3, CWBX-3	1095 mm	1118 mm	640 mm	660 mm
CWBR-4, CWBX-4	1426 mm	1448 mm	640 mm	660 mm
CWBR-5, CWBX-5	1756 mm	1778 mm	640 mm	660 mm
CWBR-6, CWBX-6	2086 mm	2108 mm	640 mm	660 mm
Slim Series				
CWBR-S1, CWBX-S1	641 mm	662 mm	433 mm	456 mm
CWBR-S2, CWBX-S2	1175 mm	1196 mm	433 mm	456 mm
CWBR-S3, CWBX-S3	1710 mm	1731 mm	433 mm	456 mm
CWBR-S4, CWBX-S4	2245 mm	2266 mm	433 mm	456 mm

ACCESSORIES – PAGE 13



Remote Refrigerated Drop-In Wells

Hatco's Remote Refrigerated Drop-In Wells keep pre-chilled food products at safe-serving temperatures but in a remote configuration that offers unlimited flexibility for your own particular dining design needs.

- Full-size, insulated wells available in 1- to 6-pan configurations
- NSF 7 Component approved cold wall construction keeps food cold without drying it out
- Optimal insulation on sides and bottom to ensure better cold retention. Environmentally-friendly insulation used throughout

- CWBR models include a condensing unit (shipped loose, can be field mounted up to 15.24 meters of tubing from unit) and control panel (shipped loose - probe wires are 2.74 meters) for installing in more convenient or desirable locations
- CWBX model include a control panel (shipped loose - probe wires are 2.74 meters) but without a condensing unit for the increased flexibility of multiple cold well configurations
- Auto-defrost is activated through an advanced electronic controller programmed at the customer location
- 1" NPT (National Pipe Thread) brass drain simplifies cleaning

REMOTE REFRIGERATED DROP-IN FULL-SIZE WELLS – WITH CONDENSING UNIT AND REMOTE CONTROL PANEL

Model	Dimensions (W x D x H)	List Price
CWBR-1	483 x 686 x 305 mm	\$6680
CWBR-2	813 x 686 x 305 mm	7141
CWBR-3	1143 x 686 x 305 mm	7691
CWBR-4	1473 x 686 x 305 mm	8275
CWBR-5	1803 x 686 x 305 mm	9005
CWBR-6	2134 x 686 x 305 mm	9580

CE Mark not available.

All Remote Refrigerated Drop-In Well Models with Condensing Unit and Remote Control Panel Feature:

Voltage: 220-240V, single phase.

Models Shipped with: Electronic temperature control, condensing unit and TXV valve (all shipped loose).

Consult Factory for: HP, watts, shipping and refrigerant specifications.

REMOTE REFRIGERATED DROP-IN FULL-SIZE WELLS – WITH REMOTE CONTROL PANEL

Model	Dimensions (W x D x H)	List Price
CWBX-1	483 x 686 x 433 mm	\$5167
CWBX-2	813 x 686 x 433 mm	5628
CWBX-3	1143 x 686 x 433 mm	6178
CWBX-4	1473 x 686 x 433 mm	6762
CWBX-5	1803 x 686 x 433 mm	7492
CWBX-6	2134 x 686 x 433 mm	8067

CE Mark not available.

All Remote Refrigerated Drop-In Well Models with Remote Control Panel Feature:

Voltage: 220-240V, single phase.

Models Shipped with: Electronic temperature control, TXV valve (shipped loose) and a solenoid valve attached to well.

Consult Factory for: HP, watts, shipping and refrigerant specifications.

CWBR-6 with accessory food pans and pan support bars



Control panel and a condensing unit (shipped loose)



CWBX-6 with accessory food pans and pan support bars



Control panel (shipped loose)



OPTIONS (available at time of purchase only)

Slant Options –


CWBR-1SLANT	Slant Option for CWBR-1, CWBX-1	\$269
CWBR-2SLANT	Slant Option for CWBR-2, CWBX-2	290
CWBR-3SLANT	Slant Option for CWBR-3, CWBX-3	311
CWBR-4SLANT	Slant Option for CWBR-4, CWBX-4	332
CWBR-5SLANT	Slant Option for CWBR-5, CWBX-5	353
CWBR-6SLANT	Slant Option for CWBR-6, CWBX-6	374

Gasket Options –

BEZELGASKET-1	Factory installed for CWBR or CWBX-1	\$ 87
BEZELGASKET-2	Factory installed for CWBR-2, CWBX-2	87
BEZELGASKET-3	Factory installed for CWBR-3, CWBX-3	114
BEZELGASKET-4	Factory installed for CWBR-4, CWBX-4	114
BEZELGASKET-5	Factory installed for CWBR-5, CWBX-5	122
BEZELGASKET-6	Factory installed for CWBR-6, CWBX-6	122





CWBR-2 with slant option
CWBR-2SLANT



BEZELGASKET-1

Factory installed option (eliminates the need for silicone or other sealants)

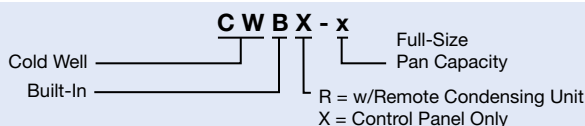

COUNTERTOP CUT-OUT DIMENSIONS – PAGE 10
ACCESSORIES – PAGE 13



July 1, 2022

Export Price List

Remote Refrigerated Slim Drop-In Wells

Hatco's Remote Refrigerated Slim Drop-In Well is a full-size unit that blankets your pre-chilled food product to retain optimum freshness and taste in one efficient and easy operation – but placed lengthwise and in two remote configurations. This provides customers with a complete cold well within easy reach, regardless of the sneeze guards and unlimited flexibility for your design needs.

- Full-size, Insulated wells available in 1 to 4 full-size pan configurations
- NSF 7 Component approved cold wall construction (CWBR-S only), keeps food product cold without drying it out
- Optimal insulation on sides and bottom to ensure better cold retention. Environmentally-friendly insulation used throughout
- CWBR-S models include a condensing unit (shipped loose, can be field mounted up to 15.24 meters of tubing from unit) and control panel (shipped loose - probe wires are 2.74 meters) for installing in more convenient or desirable locations
- CWBX-S model include a control panel (shipped loose - probe wires are 2.74 meters) but without a condensing unit for the increased flexibility of multiple cold well configurations
- Easy serviceability with a sight glass, service valves, dryer and a receiver (CWBR-S models only)
- Auto-defrost is activated through an advanced electronic controller programmed at customer location
- Optimal insulation on sides and bottom ensure better cold retention
- 1" NPT (National Pipe Thread) brass drain simplifies cleaning



CWBR-S4 with accessory (hotel) food pans and additional support bars

Control panel (shipped loose)



Condensing unit (shipped loose)

CWBX-S2 with accessory (hotel) food pans and additional support bars



Control panel (Shipped loose)

REMOTE REFRIGERATED SLIM DROP-IN FULL-SIZE WELLS – WITH CONDENSING UNIT AND REMOTE CONTROL PANEL

Model	Dimensions (W x D x H)	List Price
CWBR-S1	687 x 481 x 305 mm	\$6680
CWBR-S2	1222 x 481 x 305 mm	7362
CWBR-S3	1757 x 481 x 305 mm	8557
CWBR-S4	2292 x 481 x 305 mm	10383

All Remote Refrigerated Slim Drop-In Well Models with Condensing Unit and Remote Control Panel Feature:

Voltage: 220/230/240V, single phase.

Models Shipped with: Electronic temperature control, condensing unit and TXV valve (all shipped loose).

Consult Factory for: HP, watts, shipping and refrigerant specifications.

REMOTE REFRIGERATED SLIM DROP-IN FULL-SIZE WELLS – WITH REMOTE CONTROL PANEL

Model	Dimensions (W x D x H)	List Price
CWBX-S1	687 x 481 x 435 mm	\$5167
CWBX-S2	1222 x 481 x 435 mm	5628
CWBX-S3	1757 x 481 x 435 mm	6178
CWBX-S4	2292 x 481 x 435 mm	6762

All Remote Refrigerated Slim Drop-In Well Models with Remote Control Panel Feature:

Voltage: 220/230/240V, single phase

Models Shipped with: Electronic temperature control, TXV valve (all shipped loose) and a solenoid valve attached to the well.

Consult Factory for: HP, watts, shipping and refrigerant specifications.


OPTIONS (available at time of purchase only)

Slant Options –


CWB-S1SLANT	Slant Option for CWBR-S1, CWBX-S1	\$297
CWB-S2SLANT	Slant Option for CWBR-S2, CWBX-S2	318
CWB-S3SLANT	Slant Option for CWBR-S3, CWBX-S3	339
CWB-S4SLANT	Slant Option for CWBR-S4, CWBX-S4	359

Gasket Options –

BEZELGASKET-S1	Factory installed for CWBR-S1, CWBX-S1	\$ 87
BEZELGASKET-S2	Factory installed for CWBR-S2, CWBX-S2	87
BEZELGASKET-S3	Factory installed for CWBR-S3, CWBX-S3	114
BEZELGASKET-S4	Factory installed for CWBR-S4, CWBX-S4	114

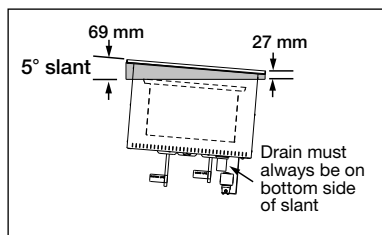


Slant Option for CWBR-S1, S2, S3, S4



BEZELGASKET-S1

Factory installed option (eliminates the need for silicone or other sealants)



COUNTERTOP CUT-OUT DIMENSIONS – PAGE 10
ACCESSORIES – PAGE 13

Refrigerated Drop-In Well Accessories *(available for purchase at any time)*



CWB-2 with optional
CWB-2SLANT and
accessory food pans
and pan support bars

PANS – TRIVETS *(available for purchase at any time)*

ST PAN 1/3	Third-Size Stainless Steel Pan – 324 W x 175 D x 64 H mm	\$64
ST PAN 1/2	Half-Size Stainless Steel Pan – 324 W x 264 D x 64 H mm	74
ST PAN 2	Full-Size Stainless Steel Pan – 324 W x 527 D x 64 H mm	88
ST PAN 4	Full-Size Stainless Steel Pan – 324 W x 527 D x 102 H mm	110
HDW 6" PAN	Full-Size Stainless Steel Pan – 324 W x 527 D x 152 H mm	120


Wire Trivets Stainless –

TRIVET (1/2)SS	Half-Size – 259 W x 194 D mm	\$119
TRIVET SS	Full-Size – 259 W x 457 D mm	165

ST PAN 1/3


ST PAN 1/2

ST PAN 2



HDW 6" PAN

ST PAN 4

TRIVET
(1/2)SS

TRIVET SS

SUPPORT BARS – FALSE BOTTOMS *(available for purchase at any time)*

CWB12BAR	305 mm Pan Support Bar for Drop-In Ice or Refrigerated Wells	\$22
CWB20BAR	508 mm Pan Support Bar for Drop-In Ice or Refrigerated Wells	26

False Bottom for Drop-In Refrigerated Wells (Perforated False Bottom Accessory, choose your appropriate pan size) –


CWB-1FB	For CWB-1 Series (1-Part Accessory)	\$102
CWB-2FB	For CWB-2 Series (1-Part Accessory)	187
CWB-3FB	For CWB-3 Series (2-Part Accessory)	272
CWB-4FB	For CWB-4 Series (2-Part Accessory)	357
CWB-5FB	For CWB-5 Series (3-Part Accessory)	442
CWB-6FB	For CWB-6 Series (3-Part Accessory)	527

False Bottom for Slim Refrigerated Wells (choose your appropriate pan size) –


1FBS8	For CWB-S1 Series (1-Part Accessory)	\$102
2FBS8	For CWB-S2 Series (1-Part Accessory)	187
3FBS8	For CWB-S3 Series (2-Part Accessory)	272
4FBS8	For CWB-S4 Series (2-Part Accessory)	357

Support Bars

Choose the appropriate
kit for IWB or
CWB series




CWB-3FB



False Bottom Accessories
1-part, 2- or 3-part(s) depending
on pan size


(CWB-1, -2, -3, -4,
-5 or -6FB)
for the CWB series

False Bottom placed on bottom
of unit - 203 mm H for ice



(1, 2, 3, or 4FBS8)
for the
CWB-S series

False Bottom placed on bottom
of unit – allows for 203 mm of ice





Drop-In Frost Tops Ordering Instructions

Cutaway of **FTB-3**
with accessory sheet pans



Please specify the following with each order:

- Desired Voltage:**
220-240V
- Number of Full-Size Sheet Pans Accommodated:**
1-, 2- or 3-pan as rectangular sheet pans with a Slim or Standard configuration
- Depth of Model:** Standard configuration (735 mm D) or Slim configuration (535 mm D)
- Drain** – 1" NPT Drain for FTB-2, FTB-3 FTB-S2, FTB-S3 only (drain plumbing to be installed per local codes)
- Agency** – NSF 7 Component
- Electronic Control Assembly** can be mounted on either side of the Condensing Unit or remotely mounted up to 1219 mm from the unit (cannot be mounted over the Condensing Unit)

Accessories

- Pans** –
 - Half-size sheet pan
457 W x 330 D mm
 - Full-size sheet pan
457 W x 660 D mm

From below, you can see the condenser unit after being pulled out by the technician, allowing easy access and visibility to all service components



The sight glass gives an inside look into a usually closed system to determine if the refrigerant is low or if there is water in the system

DROP-IN FROST TOP AND SLIM DROP IN FROST TOP COUNTERTOP CUT-OUTS


Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
FTB-1	494 mm	511 mm	697 mm	711 mm
FTB-2	949 mm	965 mm	694 mm	711 mm
FTB-3	1407 mm	1422 mm	694 mm	711 mm
Slim Series				
FTB-S2	1354 mm	1372 mm	494 mm	511 mm
FTB-S3	2011 mm	2029 mm	494 mm	511 mm



Drop-In Frost Tops and Drop-In Slim Frost Tops

Convenience meets style with the Hatco Drop-In Frost Tops. Perfect for quick turn products on self-serve buffets. Ideal for snacks, hors d'oeuvres, side dishes, desserts... truly a unit for breakfast, lunch and dinner. Sturdy construction and easy clean-up while keeping things cool. Also available in a Slim configuration, providing wider access to your customer.

- Accommodates full-size sheet pans
- Units include a 1" NPT (National Pipe Thread) brass drain (excluding one pan units) and refrigeration system
- Electronic adjustable temperature control can be mounted to either side of the condensing unit or remotely up to 1219 mm from unit
- The condensing unit, mounted on the center of the unit, rotates 90° or 180°
- Mobile condensing unit may be moved in 165 mm increments from end to center in the FTB-3, FTB-S2, -S3 units, and in 76 mm increments from end to center in the FTB-2 (at installation)
- Optimal insulation on sides and bottom to ensure better cold retention, and built with one of the most efficient condensing units on the market
- Auto-defrost is activated through an advanced electronic controller programmed at the customer location

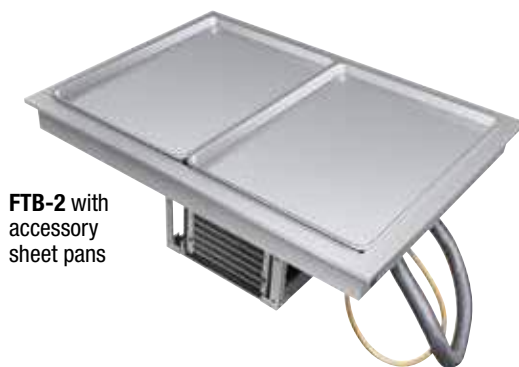

FTB-2 with accessory sheet pans



FTB-S2 with accessory sheet pans

DROP-IN FROST TOPS AND DROP-IN SLIM FROST TOPS

Model	Dimensions (W x D x H)	List Price
FTB-1	535 x 735 x 437 mm	\$7583
FTB-2	991 x 735 x 437 mm	8408
FTB-3	1448 x 735 x 437 mm	9334
Slim		
FTB-S2	1395 x 535 x 437 mm	\$8491
FTB-S3	2053 x 535 x 437 mm	9479

CE Mark not available.

All Drop-In Frost Top Models Feature:

Voltage: 220-240V, single phase.


Models Shipped with: Electronic temperature control, condensing unit, compressor and flexible refrigerant lines to bottom of unit.

Consult Factory for: HP, watts, shipping and refrigerant specifications.

ACCESSORIES (available for purchase at any time)

ALUM PAN	Half-Size Sheet Pan – 457 W x 330 D mm	\$35
18" SHEET PAN	Full-Size Sheet Pan – 457 W x 660 D mm	49

COUNTERTOP CUT-OUT DIMENSIONS – PAGE 14

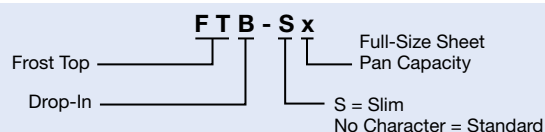



Remote Drop-In Frost Tops Ordering Instructions

Cutaway of **FTBR-3**
with accessory sheet pans

Frost Top with:
Temperature
Probe

1" NPT brass drain simplifies cleaning and flat
drain strainer ensures pans sit flush
(not available on a one pan unit)

Recessed walls designed to
prevent food pan slippage

Control Panel

Auto-defrost activated
through an advanced
electronic controller
programmed at the
customer location

Environmentally-
friendly insulation
used throughout

NSF 7 Component approved, keeps food
product cold without drying it out

FTBR: Condensing Unit
FTBX: No Condensing Unit

Please specify the following with each order:

1. **Desired Voltage:**
220 or 240V
2. **Number of Full-Size Sheet Pans Accommodated:**
1-, 2- or 3-pan as rectangular sheet pans
3. **Depth of Model:** Standard configuration (735 mm D)
or Slim configuration (535 mm D)
4. **Remote Refrigeration**
Note: Shipped loose: Frost Top, Control Panel
(Probe Wires are 2.74 meters) and a TXV Valve
A. FTBX, without a Condensing Unit
(Solenoid Valve attached to Frost Top)
5. **Agency** – NSF 7 Component

Accessories

1. **Pans** –
A. Half-size sheet pan
457 W x 330 D mm
B. Full-size sheet pan
457 W x 660 D mm

REMOTE DROP-IN FROST TOP COUNTERTOP CUT-OUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
FTBR-1, FTBX-1	697 mm	711 mm	494 mm	511 mm
FTBR-2, FTBX-2	949 mm	965 mm	694 mm	711 mm
FTBR-3, FTBX-3	1407 mm	1422 mm	694 mm	711 mm
Slim Series				
FTBR-S2, FTBX-S2	1354 mm	1372 mm	494 mm	511 mm
FTBR-S3, FTBX-S3	2011 mm	2029 mm	494 mm	511 mm



Remote Drop-In Frost Tops

Keeping pre-chilled beverages, snacks, hors d'oeuvres and side dishes cool and ready-to-serve, the Hatco Remote Drop-In Frost Tops offer additional flexibility with remote configurations. Also available in a Slim configuration, providing wider access to your customer.


- Accommodates full-size sheet pans
- Units include a 1" NPT (National Pipe Thread) brass drain (excluding one pan units)
- FTBR models include a condensing unit (shipped loose, can be field mounted up to 15.24 meters of tubing from unit) and a control panel (shipped loose - probe wires are 2.74 meters) for installing in more convenient or desirable locations
- FTBX models include a control panel (shipped loose - probe wires are 2.74 meters) but shipped without a condensing unit for the increased flexibility of multiple Frost Top configurations
- Easy serviceability with a sight glass, service valves, dryer and a receiver (FTBR models only)
- Auto-defrost is activated through an advanced electronic controller programmed at the customer location (FTBR models only)
- Optimal insulation on sides and bottom to ensure better cold retention, and built with one of the most efficient condensing units on the market

FTBR-S2
with accessory
sheet pans


Frost Top
with a
temperature
probe,

control panel and

a condensing unit
(both shipped loose)

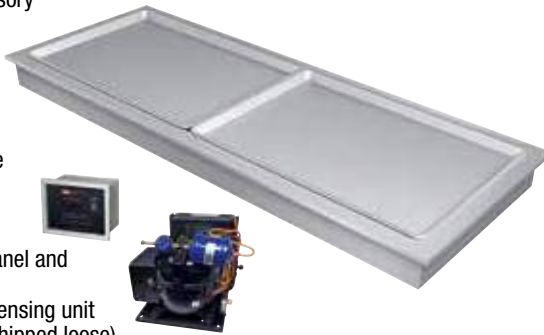

FTBX-1 (shipped
without condensing unit)

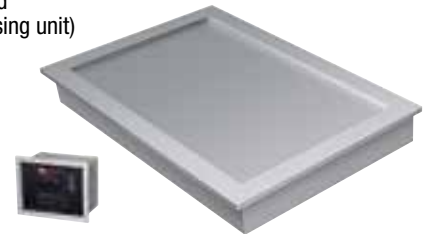

Control panel
(shipped loose)

REMOTE DROP-IN FROST TOPS – WITH CONDENSING UNIT AND CONTROL PANEL

Model	Dimensions W x D x H	List Price
FTBR-1	735 x 535 x 90 mm	\$6836
FTBR-2	991 x 735 x 90 mm	7661
FTBR-3	1448 x 735 x 90 mm	8587
Slim		
FTBR-S2	1395 x 535 x 90 mm	\$7744
FTBR-S3	2053 x 535 x 90 mm	8732

CE Mark not available.

All Remote Drop-In Frost Top Models Feature:

Voltage: 220-240V, single phase.

Models Shipped with: Electronic temperature control, condensing unit and TXV valve (all shipped loose).

Consult Factory for: HP and refrigerant specifications.

REMOTE DROP-IN FROST TOPS – WITH CONTROL PANEL

Model	Dimensions W x D x H	List Price
FTBX-1	735 x 535 x 218 mm	\$5323
FTBX-2	991 x 735 x 218 mm	6148
FTBX-3	1448 x 735 x 218 mm	7074
Slim		
FTBX-S2	1395 x 535 x 218 mm	\$6231
FTBX-S3	2053 x 535 x 218 mm	7219

CE Mark not available.

All Remote Drop-In Frost Top Models Feature:

Voltage: 220-240V, single phase.

Consult Factory for: HP and refrigerant specifications.


Models Shipped with: Electronic temperature control, TXV valve (shipped loose) and a solenoid valve attached to well.

Consult Factory for: HP and refrigerant specifications.

ACCESSORIES (available for purchase at any time)

ALUM PAN	Half-Size Sheet Pan – 457 W x 330 D mm	\$35
18" SHEET PAN	Full-Size Sheet Pan – 457 W x 660 D mm	49


COUNTERTOP CUT-OUT DIMENSIONS – PAGE 16

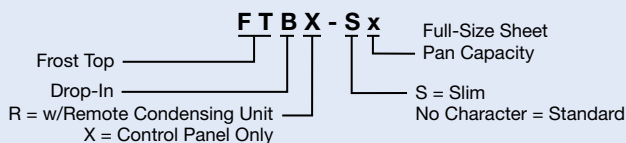



Modular/Ganged Heated Wells (Full and 4/3-Size) Ordering Instructions

Cutaway of **HWBI-5MA** with accessory food pans and optional split control boxes

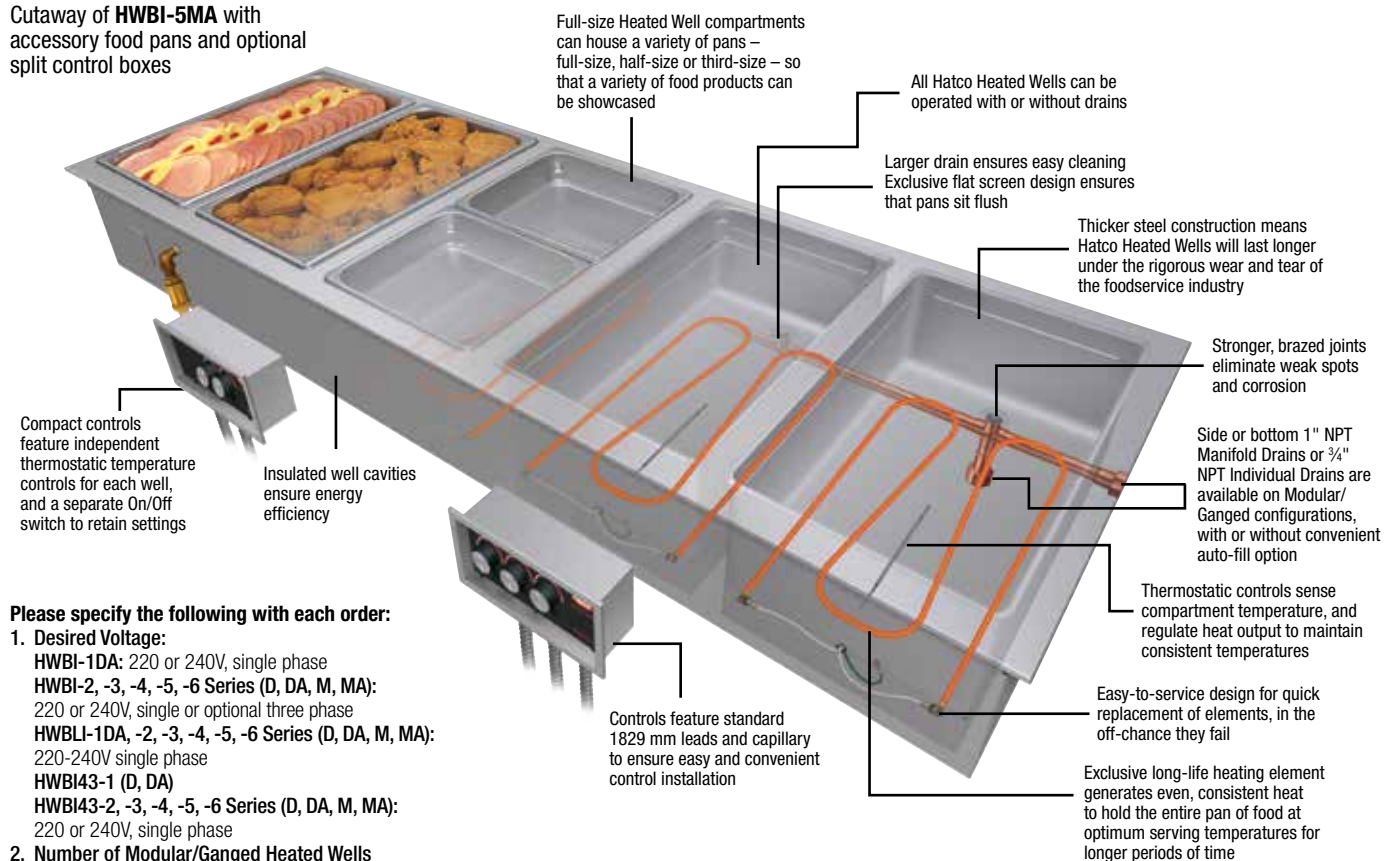

Please specify the following with each order:

1. Desired Voltage:

- HWBI-1DA:** 220 or 240V, single phase
HWBI-2, -3, -4, -5, -6 Series (D, DA, M, MA):
 220 or 240V, single or optional three phase
HWBLI-1DA, -2, -3, -4, -5, -6 Series (D, DA, M, MA):
 220-240V single phase
HWBI43-1 (D, DA)
HWBI43-2, -3, -4, -5, -6 Series (D, DA, M, MA):
 220 or 240V, single phase

2. Number of Modular/Ganged Heated Wells Required:

- 1-, 2-, 3-, 4-, 5- or 6-pan
NOTE: Modular/Ganged units are only offered as rectangular, full-size (305 x 508 mm) or as 4/3-size wells (305 x 686 mm)

3. Drain (with or without – choose drain below):

- A. Standard Individual Well 3/4" NPT Drain
 B. Manifold 1" NPT Drain with side drain, field selectable left or right side (available on HWBI- or HWBLI-2, -3, -4, -5, -6 models only)
 C. Manifold 1" NPT Drain with bottom drain, field selectable left or right well (available on HWBI- or HWBLI-2, -3, -4, -5, -6 models only)

4. Auto-fill (with or without)

5. **Bezel** allows a 686 mm depth for modular units to match Hatco CWB models in a countertop display (not available for HWBI43 Series)

6. Agency:

- A. CE Mark available on standard watt models

7. Control:

- A. Single Control Box (standard on all units)
 B. Split Control Boxes (optional on 4-, 5-, 6-pan units, not available on 1-, 2-, 3-pan units)

Accessories for Modular/Ganged Heated Wells

1. Pan Support Bars:

- A. Standard or Slim configuration 305 or 508 mm
 B. 4/3-size configuration 305 mm

2. Adapters: to convert Modular/Ganged units to hold round pans:

- A. Standard or Slim configuration
 4- to 7-liter round pans
 B. 4/3-size configuration 10-liter round pan

3. Stainless Steel Pans:

- A. Third-size at 64 mm deep
 (324 W x 175 D x 64 H mm)
 B. Half-size at 64 mm deep
 (324 W x 264 D x 64 H mm)

- C. Full-size at 64 mm deep
 (324 W x 527 D x 64 H mm)
 D. Full-size at 102 mm deep
 (324 W x 527 D x 102 H mm)
 E. Full-size at 152 mm deep
 (324 W x 527 D x 152 H mm)

4. Valves:

- A. 3/4" or 1" NPT Ball Valve
 B. 3/4" or 1" NPT Gate Valve

5. Heated Well Covers to convert Modular/Ganged Slim units to heated shelves (Combine the number of heated well covers for your appropriate pan size in either 1 or 2-pan sizes, not available for HWBI43 Series):

- A. 1-Pan Heated Well Cover
 B. 2-Pan Heated Well Cover

ACCESSORIES – PAGE 23, 34-35

DROP-IN MODULAR/GANGED HEATED WELLS COUNTERTOP CUTOUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HWBI-1 Series	359 mm	368 mm	565 mm	575 mm
HWBI-2 Series	715 mm	724 mm	565 mm	575 mm
HWBI-3 Series	1070 mm	1080 mm	565 mm	575 mm
HWBI-4 Series	1426 mm	1435 mm	565 mm	575 mm
HWBI-5 Series	1781 mm	1791 mm	565 mm	575 mm
HWBI-6 Series	2137 mm	2146 mm	565 mm	575 mm
4/3-Size				
HWBI43-1 Series	361 mm	367 mm	742 mm	748 mm
HWBI43-2 Series	716 mm	721 mm	742 mm	748 mm
HWBI43-3 Series	1072 mm	1076 mm	742 mm	748 mm
HWBI43-4 Series	1428 mm	1432 mm	742 mm	748 mm
HWBI43-5 Series	1783 mm	1788 mm	742 mm	748 mm
HWBI43-6 Series	2139 mm	2143 mm	742 mm	748 mm



From the top, the modular design allows the Modular/Ganged Heated Well to appear as one integrated unit. From below, you will see separate covers, with easy, independent access to each one. This makes installation and service easy

Modular/Ganged Heated Wells

Hatco Modular/Ganged Heated Wells are full-size units that are grouped together in a modular fashion to provide customers with a complete steam table contained within one piece of equipment for a clean, integrated look. Select the configuration that's right for your foodservice operation.

- Full-size, insulated Wells available in 1- to 6-Modular/Ganged units
- Individual thermostatic controls for each well provide the ultimate in temperature regulation
- 1829 mm conduit is standard for convenient placement of controls
- Wells empty quickly and easily with a manifold drain option

- Auto-fill option to automatically fill and replenish water without user maintenance and intervention
- Separate well assemblies with independent access to each one for easy service



HWBI-5MA with standard single control box with accessory food pans

STANDARD WATT DROP-IN MODULAR/GANGED SIZE RECTANGULAR WELLS – INSULATED – TOP MOUNT

Model	Dimensions, W x D x H	Voltage	Watts	Ship Weight	List Price
HWBI-1	394 x 600 x 243 mm	220 or 240 [‡]	1215	15 kg	\$1395
HWBI-1D	394 x 600 x 243 mm	220 or 240 [‡]	1215	17 kg	1502
HWBI-1DA	394 x 600 x 243 mm	220 or 240 [‡]	1215	17 kg	2123
HWBI-2	749 x 600 x 243 mm	220 or 240 [‡]	2415	33 kg	2950
HWBI-2D	749 x 600 x 243 mm	220 or 240 [‡]	2415	35 kg	3103
HWBI-2DA*	749 x 600 x 243 mm	220 or 240 [‡]	2415	40 kg	3708
HWBI-2M	749 x 600 x 243 mm	220 or 240 [‡]	2415	34 kg	3173
HWBI-2MA	749 x 600 x 243 mm	220 or 240 [‡]	2415	39 kg	3981
HWBI-3	1105 x 600 x 243 mm	220 or 240 [‡]	3615	47 kg	3681
HWBI-3D	1105 x 600 x 243 mm	220 or 240 [‡]	3615	52 kg	3956
HWBI-3DA*	1105 x 600 x 243 mm	220 or 240 [‡]	3615	52 kg	4254
HWBI-3M	1105 x 600 x 243 mm	220 or 240 [‡]	3615	49 kg	4206
HWBI-3MA	1105 x 600 x 243 mm	220 or 240 [‡]	3615	51 kg	5014
HWBI-4	1461 x 600 x 243 mm	220 or 240 [‡]	4815	60 kg	4774
HWBI-4D	1461 x 600 x 243 mm	220 or 240 [‡]	4815	62 kg	5270
HWBI-4DA*	1461 x 600 x 243 mm	220 or 240 [‡]	4815	60 kg	5874
HWBI-4M	1461 x 600 x 243 mm	220 or 240 [‡]	4815	63 kg	5688
HWBI-4MA	1461 x 600 x 243 mm	220 or 240 [‡]	4815	63 kg	6496
HWBI-5	1816 x 600 x 243 mm	220 or 240 [‡]	6015	76 kg	5724
HWBI-5D	1816 x 600 x 243 mm	220 or 240 [‡]	6015	76 kg	6561
HWBI-5DA*	1816 x 600 x 243 mm	220 or 240 [‡]	6015	76 kg	7181
HWBI-5M	1816 x 600 x 243 mm	220 or 240 [‡]	6015	76 kg	7109
HWBI-5MA	1816 x 600 x 243 mm	220 or 240 [‡]	6015	84 kg	7896
HWBI-6	2172 x 600 x 243 mm	220 or 240 [‡]	7215	86 kg	7415
HWBI-6D	2172 x 600 x 243 mm	220 or 240 [‡]	7215	86 kg	8080
HWBI-6DA*	2172 x 600 x 243 mm	220 or 240 [‡]	7215	88 kg	8658
HWBI-6M	2172 x 600 x 243 mm	220 or 240 [‡]	7215	86 kg	8831
HWBI-6MA	2172 x 600 x 243 mm	220 or 240 [‡]	7215	89 kg	9598

[‡] 220V or 240V CE Mark available at no added charge.

* Auto-fill located on left control only and fills left-hand well. To fill all wells, drains must be connected with external manifold by installer.

All Standard Watt Drop-In Modular/Ganged Full-Size Rectangular Heated Well Models Feature:

Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation and remote thermostats with 1829 mm flexible conduits and lighted power switches.

Modular/Ganged Heated Wells Controls*

1 PAN	SINGLE CONFIGURATION	
2 PAN	SINGLE CONFIGURATION	
3 PAN	SINGLE CONFIGURATION	
4 PAN	SINGLE CONFIGURATION	
4 PAN	SPLIT CONFIGURATION	
5 PAN	SINGLE CONFIGURATION	
5 PAN	SPLIT CONFIGURATION	
6 PAN	SINGLE CONFIGURATION	
6 PAN	SPLIT CONFIGURATION	

*4-, 5-, 6-pan units: Single control box is standard. If optional split control boxes are desired, it must be specified at order.

OPTIONS (available at time of purchase only)

HWBI-SIDE	Copper Manifold drain with side exit (not available on HWBI-1)	No Charge
HWBI-BOTTOM	Copper Manifold drain with bottom exit (not available on HWBI-1)	No Charge
	686 mm deep Bezel for Modular unit to match	
OS-BEZEL27	Hatco CWB models in a countertop display	No Charge
COND-3	914 mm Flexible Conduit (1829 mm standard) available on split control only	No Charge

Heated Well Built-In	HWBI-xxA	No Character = No Auto-Fill
I = Insulated Top Mount		A = Auto-Fill Equipped
Quantity of Wells		No Character = No Drain
		D = Individual Drain Equipped
		M = Manifold Drain Equipped

COUNTERTOP CUTOUT DIMENSIONS – PAGE 18
ACCESSORIES – PAGE 23
ADDITIONAL ACCESSORIES – PAGES 34-35



Drop-In Modular/ Ganged 4/3-Size Heated Wells

Hatco Modular/Ganged 4/3-Size Heated Wells maintain hot food at safe-serving temperatures, with better quality construction, longer holding times and more accurate temperatures. A deeper single unit can hold the equivalent of 4 third-size pans.

Choose the number of wells, from 1 to 6 unit configurations, as well as voltage, auto-fill, controls and drain options. Each well has its own individual control to regulate the temperature of each food offering.

- Longer holding times with more accurate temperatures
- Separate lighted On/Off rocker switch and temperature dial for easy operation

- 50% larger drain with flat screen simplifies cleaning and holds pans level
- Unique design allows quick change of element or thermostat if needed
- EZ locking hardware for quick installation
- Stainless steel construction and solid brazed drain fitting joints for durability
- A 1829 mm conduit is included for convenient placement of controls

DROP-IN MODULAR/GANGED 4/3-SIZE RECTANGULAR WELLS – INSULATED – TOP MOUNT

Model	Dimensions W x D x H	Voltage	Watts	Ship Weight	List Price
HWBI43-1	394 x 772 x 244 mm	220 or 240 [†]	1215	19 kg	\$1967
HWBI43-1D	394 x 772 x 244 mm	220 or 240 [†]	1215	19 kg	2025
HWBI43-1DA	394 x 772 x 244 mm	220 or 240 [†]	1215	21 kg	2752
HWBI43-2	749 x 772 x 244 mm	220 or 240 [†]	2415	40 kg	3281
HWBI43-2D	749 x 772 x 244 mm	220 or 240 [†]	2415	44 kg	3402
HWBI43-2DA*	749 x 772 x 244 mm	220 or 240 [†]	2415	43 kg	4157
HWBI43-2M	749 x 772 x 244 mm	220 or 240 [†]	2415	37 kg	3731
HWBI43-2MA	749 x 772 x 244 mm	220 or 240 [†]	2415	45 kg	4487
HWBI43-3	1105 x 772 x 244 mm	220 or 240 [†]	3615	52 kg	4480
HWBI43-3D	1105 x 772 x 244 mm	220 or 240 [†]	3615	51 kg	4658
HWBI43-3DA*	1105 x 772 x 244 mm	220 or 240 [†]	3615	56 kg	5391
HWBI43-3M	1105 x 772 x 244 mm	220 or 240 [†]	3615	61 kg	5035
HWBI43-3MA	1105 x 772 x 244 mm	220 or 240 [†]	3615	61 kg	5771
HWBI43-4	1461 x 772 x 244 mm	220 or 240 [†]	4815	75 kg	5902
HWBI43-4D	1461 x 772 x 244 mm	220 or 240 [†]	4815	69 kg	6139
HWBI43-4DA*	1461 x 772 x 244 mm	220 or 240 [†]	4815	68 kg	6874
HWBI43-4M	1461 x 772 x 244 mm	220 or 240 [†]	4815	70 kg	6565
HWBI43-4MA	1461 x 772 x 244 mm	220 or 240 [†]	4815	82 kg	7300
HWBI43-5	1816 x 772 x 244 mm	220 or 240 [†]	6015	89 kg	7191
HWBI43-5D	1816 x 772 x 244 mm	220 or 240 [†]	6015	84 kg	7498
HWBI43-5DA*	1816 x 772 x 244 mm	220 or 240 [†]	6015	85 kg	8255
HWBI43-5M	1816 x 772 x 244 mm	220 or 240 [†]	6015	84 kg	7984
HWBI43-5MA	1816 x 772 x 244 mm	220 or 240 [†]	6015	92 kg	8741
HWBI43-6	2172 x 772 x 244 mm	220 or 240 [†]	7215	97 kg	8587
HWBI43-6D	2172 x 772 x 244 mm	220 or 240 [†]	7215	97 kg	8977
HWBI43-6DA*	2172 x 772 x 244 mm	220 or 240 [†]	7215	98 kg	9767
HWBI43-6M	2172 x 772 x 244 mm	220 or 240 [†]	7215	97 kg	9606
HWBI43-6MA	2172 x 772 x 244 mm	220 or 240 [†]	7215	113 kg	10390

[†] 220V or 240V CE Mark available at no added charge.

* Auto-fill located on left control only and fills left-hand well. To fill all wells, drains must be connected with external manifold by installer.

All Drop-In Modular/Ganged 4/3-Size Rectangular Heated Well Models Feature:

Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation and remote thermostats with flexible 1829 mm conduit and lighted power switches.


OPTIONS (available at time of purchase only)

HWBI-SIDE	Copper Manifold Drain with side exit (not available on HWBI43-1)	No Charge
HWBI-BOTTOM	Copper Manifold Drain with bottom exit (not available on HWBI43-1)	No Charge
COND-3	914 mm Flexible Conduit (1829 mm standard) available on split control only	No Charge




HWBI43-3DA with
- 4 third-size pans,
- 2 half-size pans and 1 third-size pan
- 1 full-size pan and 1 third-size pan

Modular/Ganged Heated Wells Controls*

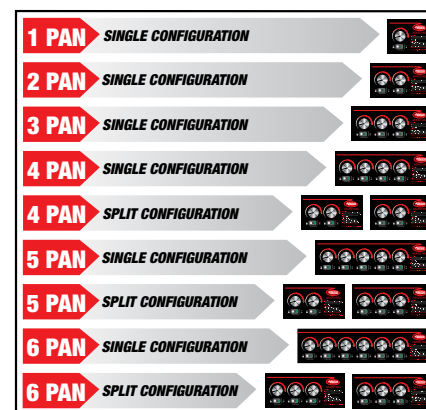


*4-, 5-, 6-pan units: Single control box is standard. If optional split control boxes are desired, it must be specified at order.

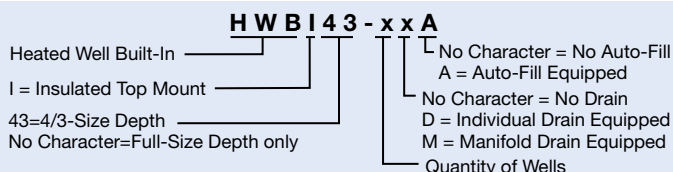

COUNTERTOP CUTOUT DIMENSIONS – PAGE 18
ACCESSORIES – PAGE 18
ADDITIONAL ACCESSORIES – PAGES 34-35

Modular/Ganged Slim Heated Wells Ordering Instructions

Cutaway of **HWBI-S4MA** with accessory food pans and standard single control box

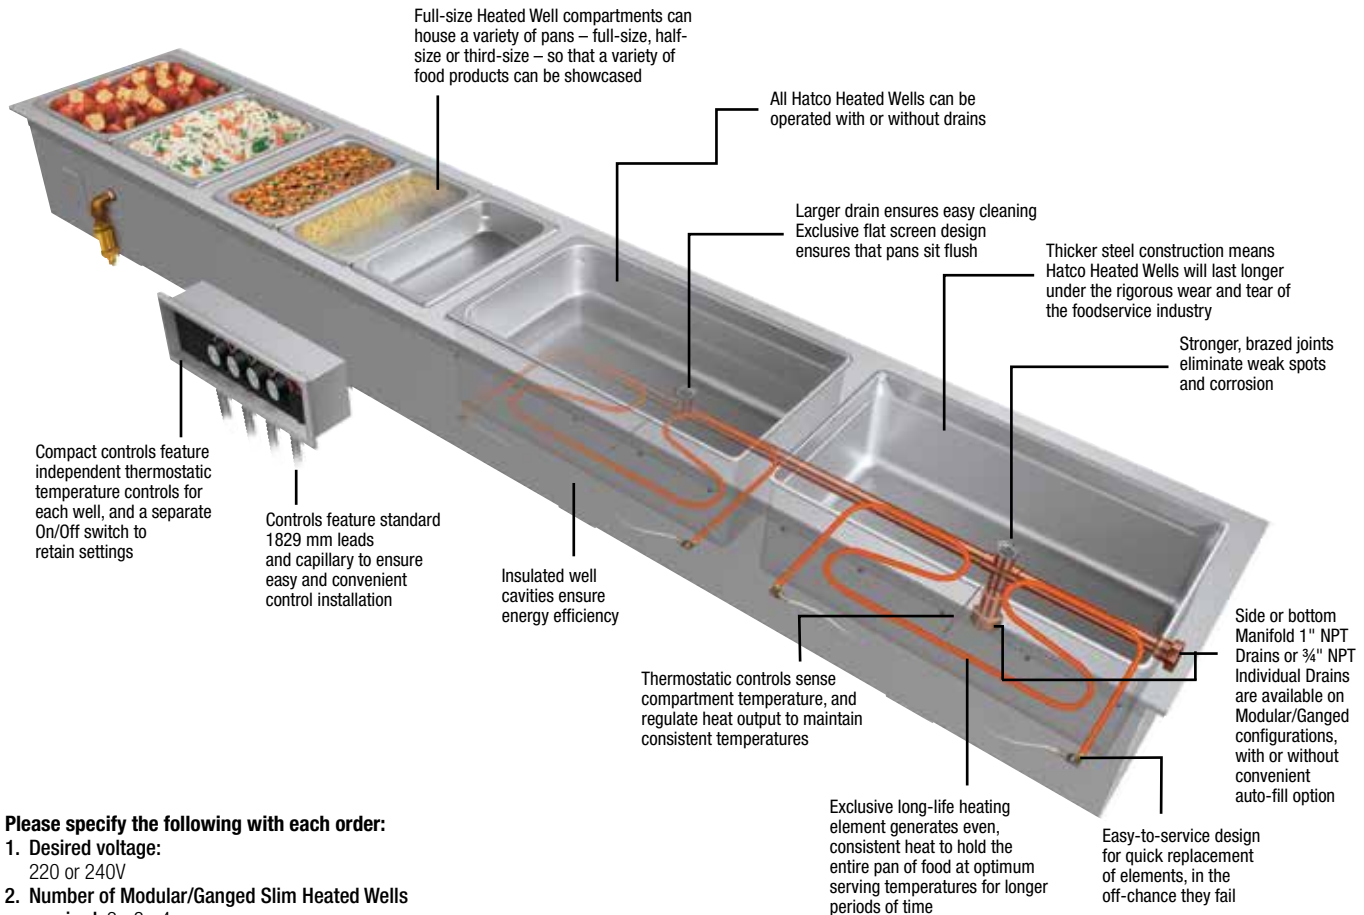

Please specify the following with each order:

- Desired voltage:**
220 or 240V
- Number of Modular/Ganged Slim Heated Wells required:** 2-, 3-, 4-pan
NOTE: Modular/Ganged Slim units are only offered as rectangular full-size (305 x 508 mm) but placed lengthwise
- Drain** (with or without):
A. Standard Individual Well 3/4" NPT Drain
B. Manifold 1" NPT Drain with side drain, field selectable left or right side
C. Manifold 1" NPT Drain with bottom drain, field selectable left or right well
- Auto-fill** (with or without)
- Bezel** allows a 481 mm D for modular units to match Hatco Refrigerated Slim Drop-In models in a countertop display
- Agency:**
A. CE Mark available
- Control:**
A. Single Controls (standard on all units)
B. Split Controls (optional on 4-pan units)

Accessories for Modular/Ganged Slim Heated Wells

- Pan Support Bars:**
305 or 508 mm
- Adapters** to convert Modular/Ganged Slim units to hold 4- or 7-liter round pans
- Stainless Steel Pans:**
A. Third-size at 64 mm deep (324 W x 175 D x 64 H mm)
B. Half-size at 64 mm deep (324 W x 264 D x 64 H mm)
C. Full-size at 64 mm deep (324 W x 527 D x 64 H mm)
D. Full-size at 102 mm deep (324 W x 527 D x 102 H mm)
E. Full-size at 152 mm deep (324 W x 527 D x 152 H mm)
- Valves:**
A. 3/4" or 1" NPT Ball Valve
B. 3/4" or 1" NPT Gate Valve
- Heated Well Covers** to convert Modular/Ganged Slim units to heated shelves (Combine the number of heated well covers for your appropriate pan size):
A. 1-Pan Heated Well Cover

ACCESSORIES – PAGE 23
ADDITIONAL ACCESSORIES –
PAGES 34-35

DROP-IN MODULAR/GANGED SLIM HEATED WELLS COUNTERTOP CUTOUTS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HWBI-S2	1121 mm	1127 mm	362 mm	368 mm
HWBI-S3	1680 mm	1686 mm	362 mm	368 mm
HWBI-S4	2239 mm	2244 mm	362 mm	368 mm



July 1, 2022

Export Price List

Modular/Ganged Slim Heated Wells

Hatco Modular/Ganged Slim Heated Wells are full-sized units that are grouped together in a modular fashion but placed lengthwise. This provides customers with a complete steam table within easy reach, regardless of the sneeze guards. Select the configuration that's right for your foodservice operation.

- Full-size, insulated wells available in 2- to 4-modular/ganged units
- Individual thermostatic controls for each well provide the ultimate in temperature regulation
- 1829 mm conduit is standard for convenient placement of controls
- Wells empty quickly and easily with a manifold drain option

- Auto-fill option to automatically fill and replenish water without user maintenance and intervention
- Separate well assemblies with independent access to each one for easy service



HWBI-S4MA with accessory food pans and optional split control boxes

DROP-IN MODULAR/GANGED SLIM RECTANGULAR WELLS – INSULATED – TOP MOUNT

Model	Dimensions W x D x H	Voltage	Watts	Ship Weight	List Price
HWBI-S2	1156 x 397 x 238 mm	220 or 240 [†]	2415	38 kg	\$3194
HWBI-S2D	1156 x 397 x 238 mm	220 or 240 [†]	2415	37 kg	3338
HWBI-S2DA*	1156 x 397 x 238 mm	220 or 240 [†]	2415	38 kg	3943
HWBI-S2M	1156 x 397 x 238 mm	220 or 240 [†]	2415	39 kg	3458
HWBI-S2MA	1156 x 397 x 238 mm	220 or 240 [†]	2415	41 kg	4261
HWBI-S3	1715 x 397 x 238 mm	220 or 240 [†]	3615	54 kg	4031
HWBI-S3D	1715 x 397 x 238 mm	220 or 240 [†]	3615	53 kg	4324
HWBI-S3DA*	1715 x 397 x 238 mm	220 or 240 [†]	3615	57 kg	4914
HWBI-S3M	1715 x 397 x 238 mm	220 or 240 [†]	3615	57 kg	4597
HWBI-S3MA	1715 x 397 x 238 mm	220 or 240 [†]	3615	57 kg	5402
HWBI-S4	2273 x 397 x 238 mm	220 or 240 [†]	4815	70 kg	5339
HWBI-S4D	2273 x 397 x 238 mm	220 or 240 [†]	4815	71 kg	5788
HWBI-S4DA*	2273 x 397 x 238 mm	220 or 240 [†]	4815	73 kg	6377
HWBI-S4M	2273 x 397 x 238 mm	220 or 240 [†]	4815	70 kg	6226
HWBI-S4MA	2273 x 397 x 238 mm	220 or 240 [†]	4815	70 kg	7007

[†] 220V or 240V CE Mark available at no added charge.

* Auto-fill located on left control only and fills left-hand well. To fill all wells, drains must be connected with external manifold by installer.

All Drop-In Modular/Ganged Slim Rectangular Heated Well Models Feature:


Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation and remote thermostats with lighted power switches.


OPTIONS (available at time of purchase only)

HWBI-SIDE	Copper Manifold Drain with side exit	No Charge
HWBI-BOTTOM	Copper Manifold Drain with bottom exit	No Charge
	483 mm D Bezel for Modular unit to match Hatco	
OS-BEZEL19	CWB Slim models in a countertop display	No Charge

Modular/Ganged Slim Heated Wells Controls*

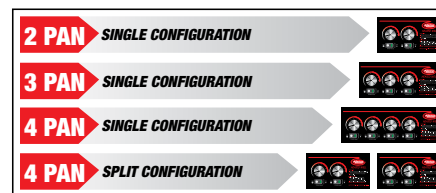

*4-Pan Units: Single control box is standard. If optional split control boxes are desired, it must be specified at order.

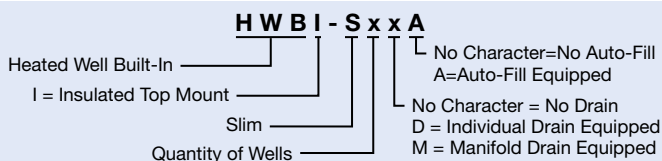

COUNTERTOP CUTOUT DIMENSIONS – PAGE 21
ACCESSORIES – PAGES 23, 34-35

Modular/Ganged Heated Wells Accessories

(available for purchase at any time)

WELL COVERS (available for purchase at any time)

For Modular/Ganged Heated Wells and Modular/Ganged Slim Heated Wells.
(Choose the number of heated well covers for your appropriate pan size in either 1 or 2-Pan sizes, not available for HWBI43 series) –

1-Pan Heated Well Cover (Overall: 356 mm W x 559 mm D x 51 mm H) –

1COVFUL-GGRAN	1 Heated Well Cover in Gray Granite	\$600
1COVFUL-BSAND	1 Heated Well Cover in Bermuda Sand	600
1COVFUL-NSKY	1 Heated Well Cover in Night Sky	600

2-Pan Heated Well Cover (Overall: 711 mm W x 559 mm D x 51 mm H) –


2COVFUL-GGRAN	2 Heated Well Cover in Gray Granite	\$1012
2COVFUL-BSAND	2 Heated Well Cover in Bermuda Sand	1012
2COVFUL-NSKY	2 Heated Well Cover in Night Sky	1012

HWBI-3


(3-pan size) with accessory heated well covers (one 1-pan heated well cover and one 2-pan heated well cover)



1COVFUL-GGRAN
accessory



2COVFUL-GGRAN
accessory



HEATED WELL COVER COMBINATIONS PER HWBI SERIES

Model Series	Using only: 1COVFUL	Model Series	Using both: 1COVFUL 2COVFUL	
HWBI-1	1	HWBI-1	1	–
HWBI-2, -S2	2	HWBI-2	–	1
HWBI-3, -S3	3	HWBI-3	1	1
HWBI-4, -S4	4	HWBI-4	–	2
HWBI-5	5	HWBI-5	1	2
HWBI-6	6	HWBI-6	–	3


ADDITIONAL ACCESSORIES – PAGES 34-35
COLORS AND FINISHES – INSIDE BACK COVER



HWB-2-11Q



HWB-3-4Q



HWB-2-7Q

HWB-2-7Q
shown with two
7QT-PAN and
7QT-LID-1



ADAPTERS – SUPPORT BARS

HWB-2-7Q	Adapter to convert warmer to hold two 7-Liter Inserts (HWBI and HWBI-S Modular Heated Wells only)	\$ 98
HWB-3-4Q	Adapter to convert warmer to hold three 4-Liter Inserts (HWBI and HWBI-S Modular Heated Wells only)	98
HWB-2-11Q	Adapter to Convert warmer to hold two 10-Liter Inserts (HWBI43 Modular Heated Wells only)	123
HWBGM12BAR	305 mm Pan Support Bar for Drop-In Modular/Ganged Models	21
HWBGM20BAR	508 mm Pan Support Bar for Drop-In Modular/Ganged Models	25

Support Bars

Choose the appropriate kit for HWBI or HWB series



HWB-MNT-REC



HWBI2MANIF



BALLVALVE1INCH



GATEVALVE1INCH

MOUNTING KITS – VALVES

Necessary at your Well installation –

HWB-MNT-REC	Kit allows mounting to thick, non-combustible countertops - 8 Brackets	\$90
--------------------	--	-------------

External Manifold includes Individual Ball Valve for each Well (HWBI only, not available for the Slim models) –

HWBI2MANIF	2-Pan Accessory	\$ 930
HWBI3MANIF	3-Pan Accessory	1320
HWBI4MANIF	4-Pan Accessory	1709
HWBI5MANIF	5-Pan Accessory	2099
HWBI6MANIF	6-Pan Accessory	2489

Necessary at your Well Installation –

BALLVALVE3/4	High Temperature 3/4" NPT Ball Valve for units with Individual Drain(s) and no Manifold	\$117
BALLVALVE1INCH	High Temperature 1" NPT Ball Valve for units with Manifold Drain (Ganged Heated Wells only)	90
GATEVALVE3/4IN	High Temperature 3/4" NPT Gate Valve for units with Individual Drain(s) and no Manifold	135
GATEVALVE1IN	High Temperature 1" NPT Gate Valve for units with Manifold Drain (Ganged Heated Wells only)	200
HWB-RDHF	Heated Well Remote Handle for 3/4" Drains only and includes a Ball Valve	463



HWB-RDHF
Attaches to 3/4" Drain and includes a Ball Valve



Individual Built-In And Drop-In Heated Wells

Ordering Instructions

Please specify the following with each order:

1. **Desired Voltage:** 220 or 240V

2. **Base Size of Heated Well:**

A. Rectangular:

Full (305 x 508 mm) or

4/3 (305 x 686 mm)

B. Round: 4-liter, 7-liter or 10-liter

3. **Drain** (with or without)

4. **Auto-fill** (with or without)

5. **Insulated or Uninsulated**



Insulated Well Construction
Full-size models are available with insulation for energy saving

6. **Mounting Style:**

A. Top Mounted

B. Bottom Mounted (rectangular full-size units only)

7. **Wattage:**

A. High watt

B. Standard watt

8. **Agency:**

A. CE Mark available (fabricator models are not a CE offering, items are sold as components for fabricator self certification)



Top Mounted Heated Well: Unit is mounted through the top surface of a sheet metal counter and secured with turn tabs (unit and food pan edge visible)



Bottom Mounted Heated Well: Full-size (only) unit is mounted to the bottom surface of a sheet metal counter and secured with customer provided turned bends and fasteners (only food pan edge visible)

CONTROL BOXES, COUNTERTOP CUT-OUT DIMENSIONS – PAGE 25

HWBIB-FULD
with accessory food pan

Thicker gauge steel construction means Hatco Heated Wells will last longer under the rigorous wear and tear of the foodservice industry

HWBI-FULD
with accessory food pan

Insulated well cavities ensure energy efficiency



HWB-FULD with accessory food pan (single unit holding 3 third-size pans unit depth is 553 mm)

HWB-43D with accessory food pans (single unit holding 4 third-size pans – unit depth is 726 mm)



Easy to access the heating elements, if it ever becomes necessary to change them

HWBI-11QTDA
with accessory food pan



HWBI-7QTDA
with accessory food pan

HWB-11QT
with accessory food pan



HWB-7QT
with accessory food pan

HWB-4QT
with accessory food pan

H W B x x x - x D A									
Heated Well Built-In									No Character = No Auto-Fill
No Character = Standard Watt									A = Auto-Fill Equipped
H = High Watt									No Character = No Drain
No Character = Uninsulated									D = Drain Equipped
I = Insulated Top Mount									FUL = Full-Size Pan
IB=Insulated Bottom Mount									43 = 4/3-Size Pan
RT = Thermostatic Control (Fabricator Only)									4QT = Round 4-Liter Pan
RN = Infinite Switch Control (Fabricator Only)									7QT = Round 7-Liter Pan
									11QT = Round 10-Liter Pan

Individual Built-In And Drop-In Heated Wells Ordering Instructions

Options for Individual Built-In and Drop-In Heated Wells

1. Control Box:

- A. Larger (front mounted) Recessed Thermostatic Control Box with Lighted On/Off Rocker Switch and Angled Recessed Controls for easy readability (not for auto-fill)
- B. Optional ITC Control (not available for auto-fill, 4-Liter Round Wells, Insulated Round Wells or units without a drain)
- C. Standard Control for auto-fill models only

2. Control Type (UR and C-UR Components):

- A. Thermostatic
 - B. Infinite
- NOTE:** Infinite controls are only available on fabricator units

3. Leads: Extended high temp lead wire, per 305 mm

4. Thermostat with 1829 mm Capillary (914 mm standard)

5. Corners

- A. Standard (Rounded)
- B. Square Corners

Accessories for Individual Built-In and Drop-In Heated Wells

- 1. **Mounting Kits** for combustible countertops (individual drop-in top mount units only)
- 2. **Pan Support Bars:** 305 or 508 mm
- 3. **Adapters** to convert rectangular full-size units to hold 4- or 7-Liter round pans, or 4/3-size units to hold 10-Liter round pans
- 4. **Stainless Steel Pans:**
 - A. Third-size at 64 mm deep (324 W x 175 D x 64 H mm)
 - B. Half-size at 64 mm deep (324 W x 264 D x 64 H mm)
 - C. Full-size at 64 mm deep (324 W x 527 D x 64 H mm)
 - D. Full-size at 102 mm deep (324 W x 527 D x 102 H mm)
 - E. Full-size at 152 mm deep (324 W x 527 D x 152 H mm)

STANDARD CONTROLS
(Not for Auto-fill)
Larger Recessed
Thermostatic
Control – No Charge



OPTIONAL CONTROLS

ITC Control
(Not available
for 4-Liter
Round Wells,
Insulated
Round
Wells, units
without a
drain or
auto-fill)



CONTROL TYPE – UR and C-UR Components



Thermostatic control



Infinite control

STANDARD CONTROL AUTO-FILL

HWB-43DA, HWBIB-FULDA, HWBI-FULDA, HWBI-7QTDA, -11QTDA
Standard Control (only for auto-fill)



CONTROL CUTOUT DIMENSIONS

Standard Larger Recessed Thermostatic Control:

149 W x 162 H mm

Optional ITC Control:

149 W x 162 H mm

Standard Control for Auto-fill


257 W x 121 H mm

5. Valve:

- A. 3/4" NPT Ball Valve for unit with Drain
- B. 3/4" NPT Gate Valve for unit with Drain

6. Remote Handle for 3/4" Drains only and includes a Ball Valve

ACCESSORIES – PAGES 34-35



How to Order a Hatco Heated Well in Video

Hatco has given you a variety of simple and easy ways to order your well. You can read the Ordering Instructions here or watch a video "How to Order a Hatco Heated Well." Go to hatcocorp.com and click on the Video Library. While you are there, watch the "Hatco Refrigerated Wells" video as well.

COMBUSTIBLE COUNTERTOP CUTOUTS – BUILT-IN AND DROP-IN HEATED WELLS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HWB-FUL, -FULD, FULDA	356 mm	362 mm	559 mm	565 mm
HWBI-FUL, -FULD, FULDA	356 mm	362 mm	559 mm	565 mm
HWB-, HWBI-43	356 mm	362 mm	737 mm	743 mm
HWB-, HWBI-4QT	229 mm	235 mm	229 mm	235 mm
HWB-, HWBI-7QT	279 mm	286 mm	279 mm	286 mm
HWB-, HWBI-11QT	330 mm	337 mm	330 mm	337 mm

NONCOMBUSTIBLE COUNTERTOP CUTOUTS – BUILT-IN AND DROP-IN HEATED WELLS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HWB-FUL	321 mm	328 mm	524 mm	531 mm
HWB-FULDA	321 mm	328 mm	524 mm	532 mm
HWBI-FUL, -FULD	324 mm	328 mm	528 mm	531 mm
HWBI-FULDA▼	324 mm	328 mm	530 mm	532 mm
HWBIB-FUL▼, -FULDA▼	306 mm	306 mm	509 mm	509 mm
HWB-, HWBI-43	323 mm	328 mm	704 mm	711 mm
HWB-4QT,	181 mm Dia.	192 mm Dia.	—	—
HWB-7QT	232 mm Dia.	243 mm Dia.	—	—
HWB-11QT	282 mm Dia.	294 mm Dia.	—	—
HWBI-4QT,	187 mm Dia.	187 mm Dia.	—	—
HWBI-7QT	243 mm Dia.	243 mm Dia.	—	—
HWBI-11QT	289 mm Dia.	289 mm Dia.	—	—

▼ Must be flanged.



Built-In Full-Size Heated Wells

Hatco Built-In Heated Wells hold heated foods at safe-serving temperatures. Compared to other models, Hatco units offer larger drain with a flat drain screen, more consistent holding temperatures, heavier stainless steel construction, easier-to-service design for quick change of components and a remote thermostat with separate power switch.

- Rectangular full-size only in top or bottom mount, insulated or uninsulated
- Standard and high watt options
- Available with or without a drain (easy to clean with a larger drain and a flat screen)
- Easy access design allows for quick element or thermostat change
- Accessory mounting kits for combustible countertops available
- Accessory adapters to convert full-size wells to hold round pans available

Control Options

– See page 25

HWBIB-FULD with accessory food pan



HWBI-FULD with accessory food pan



HWB-FULD with accessory food pan

BUILT-IN FULL-SIZE RECTANGULAR WELLS

Model	Description	Dimensions W x D x H	Voltage	Watts	Ship Weight	List Price
Standard Watt						
HWB-FUL	Uninsulated Top or Bottom Mount	347 x 553 x 237 mm	220 or 240 [†]	1200	10 kg	\$ 867
HWB-FULD	Uninsulated Top or Bottom Mount w/Drain	347 x 553 x 237 mm	220 or 240 [†]	1200	10 kg	916
HWB-FULDA	Uninsulated Top or Bottom Mount w/Drain, Auto-fill	347 x 553 x 239 mm	220 or 240 [†]	1215	14 kg [†]	1664
HWBI-FUL	Insulated Top or Bottom Mount	347 x 553 x 261 mm	220 or 240 [†]	1200	12 kg	986
HWBI-FULD	Insulated Top or Bottom Mount w/Drain	347 x 553 x 261 mm	220 or 240 [†]	1200	11 kg	1035
HWBI-FULDA	Insulated Top Mount Only w/Drain, Auto-fill	347 x 553 x 263 mm	220 or 240 [†]	1215	14 kg	1783
HWBIB-FUL	Insulated Bottom Mount Only	352 x 561 x 236 mm	220 or 240 [†]	1200	13 kg	986
HWBIB-FULD	Insulated Bottom Mount Only w/Drain	352 x 561 x 236 mm	220 or 240 [†]	1200	13 kg	1035
HWBIB-FULDA	Insulated Bottom Mount Only w/Drain, Auto-fill	352 x 561 x 236 mm	220 or 240 [†]	1215	16 kg	1783
High Watt						
HWBH-FUL	Uninsulated Top or Bottom Mount	347 x 553 x 237 mm	220 or 240 [†]	1650	10 kg	\$ 867
HWBH-FULD	Uninsulated Top or Bottom Mount w/Drain	347 x 553 x 237 mm	220 or 240 [†]	1650	10 kg	916
HWBH-FULDA	Uninsulated Top or Bottom Mount w/Drain, Auto-fill	347 x 553 x 239 mm	220 or 240 [†]	1665	12 kg [†]	1664
HWBHI-FUL	Insulated Top or Bottom Mount	347 x 553 x 261 mm	220 or 240 [†]	1650	12 kg	986
HWBHI-FULD	Insulated Top or Bottom Mount w/Drain	347 x 553 x 261 mm	220 or 240 [†]	1650	14 kg	1035
HWBHI-FULDA	Insulated Top Mount Only w/Drain, Auto-fill	347 x 553 x 263 mm	220 or 240 [†]	1665	14 kg	1783
HWBIB-FUL	Insulated Bottom Mount Only	352 x 561 x 236 mm	220 or 240 [†]	1650	14 kg	986
HWBIB-FULD	Insulated Bottom Mount Only w/Drain	352 x 561 x 236 mm	220 or 240 [†]	1650	14 kg	1035
HWBIB-FULDA	Insulated Bottom Mount Only w/Drain, Auto-fill	352 x 561 x 236 mm	220 or 240 [†]	1665	16 kg	1783

[†] 220 or 240V CE Mark available, add \$20.

All Built-In Full-Size Rectangular Heated Well Models Feature:


Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation (top mounted only), 914 mm conduits between the control and well (except auto-fill unit) and a remote thermostat with lighted power switch



Optional auto-fill supply line

All Hatco Heated Wells can be ordered with or without drains (50% larger drain with exclusive flat screen ensures the pans set flush)

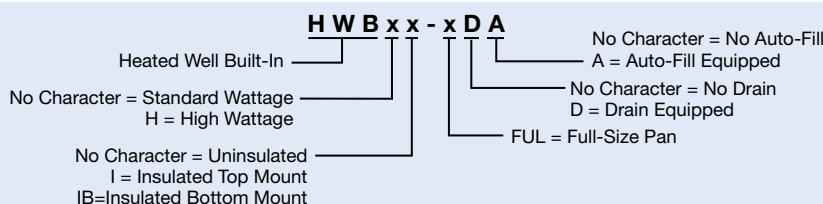

**COUNTERTOP CUTOUT
DIMENSIONS – PAGE 25
OPTIONS – PAGE 25
ACCESSORIES – PAGES 34-35**

HWB-43D and HWBI-FULD with accessory food pans (shown with **GR2AHL** with standard *Designer* non-adjustable stands and optional *Designer* Black and sneeze guards)



OPTIONS (available at time of purchase only)

Designer Colors for Flush Mount Control Box Bezel, not available for HWB-FUL w/cord – Non-standard colors are non-returnable –

RED	Warm Red	\$46
BLACK	Black	46
GRAY	Gray Granite	46
WHITE	White Granite	46
NAVY	Navy Blue	46
GREEN	Hunter Green	46
COPPER	Antique Copper	46
HWB-LEAD	Power Supply Lead Wire (Lead Wire only – Conduit not included)	per 305 mm \$13
HWB-CORD	HWB-FUL with Cord-Standard (Shown below)	add 39
	All models except Auto-fill models	
HWBI-CORD	HWBI-FUL with Cord-Standard (Shown below)	add 39
	All models except Insulated Top Mount with auto-fill	
HWBIB-BRKT	Mounting Bracket for Insulated Bottom Mount (HWBIB series)	add 26
HWB-SQUARE	Square Pan Corners (In lieu of standard round pan corners)	add 97

Control Options –

HWB-TSTAT	Thermostat with 1829 mm Capillary (in lieu of standard 914 mm, not available for auto-fill)	\$ 88
HWB-RTC	Larger Recessed Thermostatic Control (not available for auto-fill models)	No Charge
HWB-ITC	ITC Control (not available for auto-fill models or units without a drain)	294

ACCESSORIES – PAGES 34-35

COLORS AND FINISHES – INSIDE BACK COVER

HWB-ITC –
Optional control (not available for auto-fill, units without a drain) shown in optional control box bezel in *Designer* White Granite



HWB-FUL
with optional
HWB-CORD



HWBIB-FULD with optional **HWBI-CORD** and accessory food pan

HWB-FUL
with optional **HWB-TSTAT** Thermostat with 6' capillary (Not available for auto-fill)

Square Corner



Standard Corner





July 1, 2022

Export Price List

Drop-In 4/3-Size Heated Wells

Convenient 4/3-Size Wells hold heated foods at safe-serving temperatures. Like the full-size models, Hatco units offer a larger drain with a flat drain screen, more consistent holding temperatures, heavier stainless steel construction, easier-to-service design for quick change of components and a remote thermostat with separate power switch.

- Rectangular 4/3-size wells
- Standard and high watt
- Available with or without a drain (easy to clean with a larger drain and a flat screen)
- Easy access design allows for quick element or thermostat change
- Accessory mounting kits for combustible countertops available
- Accessory adapters to convert 4/3-size wells to hold round pans

HWB-43D with accessory food pans (single unit holding 4 third-size pans)



HWBI-43D with accessory food pans (single unit holding 4 third-size pans)



DROP-IN 4/3-SIZE RECTANGULAR WELLS

Model	Description	Dimensions W x D x H	Voltage	Watts	Ship Weight	List Price
Standard Watt						
HWB-43	Uninsulated	346 x 727 x 239 mm	220 or 240 [†]	1200	11 kg	\$ 966
HWB-43D	Uninsulated w/Drain	346 x 727 x 239 mm	220 or 240 [†]	1200	11 kg	1015
HWB-43DA	Uninsulated w/Drain, Auto-fill	346 x 727 x 239 mm	220 or 240 [†]	1215	12 kg	1763
HWBI-43	Insulated	346 x 727 x 262 mm	220 or 240 [†]	1200	14 kg	1085
HWBI-43D	Insulated w/Drain	346 x 727 x 262 mm	220 or 240 [†]	1200	14 kg	1134
High Watt						
HWBH-43	Uninsulated	346 x 727 x 239 mm	220 or 240 [†]	1650	11 kg	\$ 966
HWBH-43D	Uninsulated w/Drain	346 x 727 x 239 mm	220 or 240 [†]	1650	11 kg	1015
HWBH-43DA	Uninsulated w/Drain, Auto-fill	346 x 727 x 239 mm	220 or 240 [†]	1665	14 kg	1763
HWBHI-43	Insulated	346 x 727 x 262 mm	220 or 240 [†]	1650	14 kg	1085
HWBHI-43D	Insulated w/Drain	346 x 727 x 262 mm	220 or 240 [†]	1650	14 kg	1134

[†] 220 or 240V CE Mark available, add \$20.

All Drop-In 4/3-Size Rectangular Heated Well Models Feature:

Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation, 914 mm conduits between the control and well (except auto-fill unit) and a remote thermostat with lighted power switch.


OPTIONS (available at time of purchase only)

HWB-LEAD	Power Supply Lead Wire (Lead Wire only – Conduit not included)	per 305 mm \$13
HWB-AFL	Models HWB, HWBH-43DA only - Left water fill hole (front is standard)	No Charge
HWB-AFR	Models HWB, HWBH-43DA only - Right water fill hole (front is standard)	No Charge
Control Options –		
HWB-TSTAT	Thermostat with 1829 mm Capillary (in lieu of standard 914 mm, not available for auto-fill)	\$ 88
HWB-RTC	Larger Recessed Thermostatic Control (not available for auto-fill models)	No Charge
HWB-ITC	ITC Control (not available for auto-fill models or units without a drain)	294

Designer Colors (Control Box/Bezel) – Non-standard colors are non-returnable – Stainless Steel is standard –

RED	Warm Red	\$46
BLACK	Black	46
GRAY	Gray Granite	46
WHITE	White Granite	46
NAVY	Navy Blue	46
GREEN	Hunter Green	46
COPPER	Antique Copper	46

Insulated Well Construction
Full-size models are available with insulation for energy savings

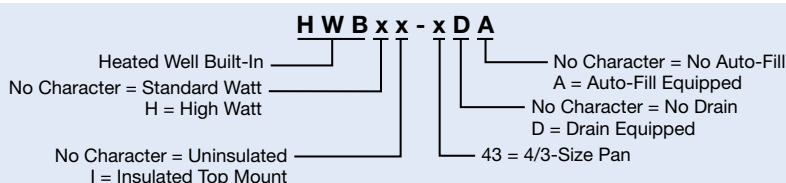

CONTROL OPTIONS – PAGE 25
COUNTERTOP CUT-OUT DIMENSIONS – PAGE 25
ACCESSORIES – PAGES 34-35
COLORS AND FINISHES – INSIDE BACK COVER

Drop-In Round Uninsulated Heated Wells

Keeping hot food at safe-serving temperatures is critical to any foodservice operation – and Hatco has the Heated Wells to meet the demands of any serving application. Thermostatic controls monitor and regulate the temperature of the well for more accurate heat and energy savings. Hatco controls feature a separate On/Off switch, which allows a previously determined setting to be maintained.

- 4-, 7- and 10-liter round wells
- Standard or high watt (4-Liter standard watt only)
- With or without drain
- EZ locking hardware for easy top mount installation
- Accessory mounting kits for combustible countertops available



Control Options

- Larger front-mounted recessed thermostatic control box with lighted On/Off rocker switch and angled recessed controls for easy readability
- Optional ITC control with large control box available for easier reading on 7- or 10-Liter standard or high watt configurations



Optional ITC control – (not for 4-Liter Round Wells or units without a drain) shown with optional control box bezel in *Designer White Granite*



Standard larger recessed thermostatic control at no charge

DROP-IN ROUND WELLS – UNINSULATED

Model	Description	Dimensions Dia. x H	Voltage	Watts	Ship Weight	List Price
4-Liter (4-Quart) – Standard Watt						
HWB-4QT	Top Mount	212 x 270 mm	220 or 240 [†]	600	5 kg	\$825
HWB-4QTD	Top Mount w/Drain	212 x 270 mm	220 or 240 [†]	600	5 kg	874
7-Liter (7-Quart) – Standard Watt						
HWB-7QT	Top Mount	262 x 244 mm	220 or 240 [†]	600	6 kg	\$825
HWB-7QTD	Top Mount w/Drain	262 x 244 mm	220 or 240 [†]	600	6 kg	874
7-Liter (7-Quart) – High Watt						
HWBH-7QT	Top Mount	262 x 244 mm	220 or 240 [†]	800	6 kg	\$825
HWBH-7QTD	Top Mount w/Drain	262 x 244 mm	220 or 240 [†]	800	6 kg	874
10-Liter (11-Quart) – Standard Watt						
HWB-11QT	Top Mount	313 x 244 mm	220 or 240 [†]	600	6 kg	\$825
HWB-11QTD	Top Mount w/Drain	313 x 244 mm	220 or 240 [†]	600	6 kg	874
10-Liter (11-Quart) – High Watt						
HWBH-11QT	Top Mount	313 x 244 mm	220 or 240 [†]	800	6 kg	\$825
HWBH-11QTD	Top Mount w/Drain	313 x 244 mm	220 or 240 [†]	800	6 kg	874

[†] 220 or 240V CE Mark available, add \$20.

All Drop-In Round Uninsulated Heated Well Models Feature:

Voltage: Single phase.


Models Shipped with: EZ locking hardware for installation, 914 mm conduits between the control and well and a remote thermostat with lighted power switch.

OPTIONS (available at time of purchase only)

HWB-LEAD	Power Supply Lead Wire (Lead Wire only – Conduit not included)	per 305 mm \$13
Control Options –		
HWB-TSTAT	Thermostat with 1829 mm (in lieu of standard 914 mm, not available for auto-fill)	\$ 88
HWB-RTC	Larger Recessed Thermostatic Control	No Charge
HWB-ITC	ITC Control with large Control Box for 7- and 10-liter Drop-In Round Wells only	294

Designer Colors (Control Box Bezel) – Non-standard colors are non-returnable – Stainless Steel is standard –

RED	Warm Red	\$46
BLACK	Black	46
GRAY	Gray Granite	46
WHITE	White Granite	46
NAVY	Navy Blue	46
GREEN	Hunter Green	46
COPPER	Antique Copper	46

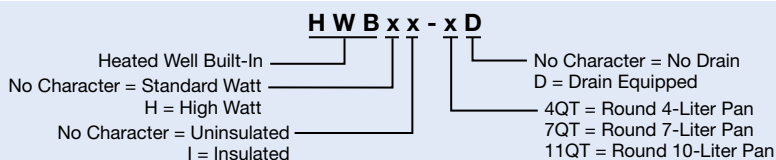

COUNTERTOP CUTOUT DIMENSIONS – PAGE 25
ACCESSORIES – PAGES 34-35
COLORS AND FINISHES – INSIDE BACK COVER



July 1, 2022

Export Price List

Drop-In Round Insulated Heated Wells

Hatco Drop-In Round Insulated Heated Wells provide flexibility and quality, with many options to choose from. These units hold steam table food hot and fresh with self-adjusting thermostats that monitor the actual temperatures and control the heat only when needed.

- Available in insulated 4-, 7- and 10-liter Round Wells
- Standard or high watt (4-Liter standard watt only)
- Controls feature a separate lighted ON/OFF rocker switch and temperature dial, allowing preset temperatures to be maintained
- Easy service access to heating elements and thermostats
- Mounting kits for combustible countertops available
- Auto-Fill models available in 7 and 10 Liter round wells

Control Options

- Larger front-mounted recessed thermostatic control box with lighted On/Off rocker switch and angled recessed controls for easy readability



Standard larger recessed thermostatic control at no charge

HWBI-7QTD
with accessory
food pan



HWBI-11QTDA with
accessory food pan

DROP-IN ROUND WELLS – INSULATED

Model	Description	Dimensions Dia. x H	Voltage	Watts	Ship Weight	List Price
4-Liter (4-Quart) – Standard Watt						
HWBI-4QT	Top Mount	212 x 271 mm	220 or 240 [†]	600	5 kg	\$944
HWBI-4QTD	Top Mount w/Drain	212 x 271 mm	220 or 240 [†]	600	6 kg	993
7-Liter (7-Quart) – Standard Watt						
HWBI-7QT	Top Mount	262 x 247 mm	220 or 240 [†]	600	6 kg	\$ 944
HWBI-7QTD	Top Mount w/Drain	262 x 247 mm	220 or 240 [†]	600	7 kg	993
HWBI-7QTD A	Top Mount w/Drain, Auto-fill	262 x 247 mm	220 or 240 [†]	615	8.6 kg	1741
7-Liter (7-Quart) – High Watt						
HWBHI-7QT	Top Mount	262 x 247 mm	220 or 240 [†]	800	6 kg	\$ 944
HWBHI-7QTD	Top Mount w/Drain	262 x 247 mm	220 or 240 [†]	800	6 kg	993
HWBHI-7QTD A	Top Mount w/Drain, Auto-fill	262 x 247 mm	220 or 240 [†]	815	8.6 kg	1741
10-Liter (11-Quart) – Standard Watt						
HWBI-11QT	Top Mount	313 x 246 mm	220 or 240 [†]	600	7 kg	\$ 944
HWBI-11QTD	Top Mount w/Drain	313 x 246 mm	220 or 240 [†]	600	10 kg	993
HWBI-11QTD A	Top Mount w/Drain, Auto-fill	313 x 246 mm	220 or 240 [†]	615	11 kg	1741
10-Liter (11-Quart) – High Watt						
HWBHI-11QT	Top Mount	313 x 246 mm	220 or 240 [†]	800	7 kg	\$ 944
HWBHI-11QTD	Top Mount w/Drain	313 x 246 mm	220 or 240 [†]	800	7 kg	993
HWBHI-11QTD A	Top Mount w/Drain, Auto-fill	313 x 246 mm	220 or 240 [†]	815	12 kg	1741

[†] 220 or 240V CE Mark available, add \$20.


All Drop-In Round Insulated Heated Well Models Feature:

Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation, 914 mm conduit and a remote thermostat with lighted power switch.

OPTIONS (available at time of purchase only)

HWB-LEAD	Power Supply Lead Wire (Lead Wire only – Conduit not included)	per 305 mm	\$13
Control Options –			
HWB-TSTAT	Thermostat with 1829 mm Capillary Thermostat with 1829 mm Capillary (in lieu of standard 914 mm, not available for auto-fill)		88
HWB-RTC	Larger Recessed Thermostatic Control (not available for auto-fill)		No Charge

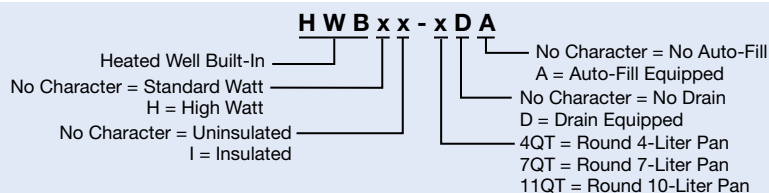

COUNTERTOP CUTOUT DIMENSIONS – PAGE 25
ACCESSORIES – PAGES 34-35

Built-In Full-Size Heated Wells - Fabricator Components

Having the same great features as all of the Hatco Heated Wells, plus the added benefit of allowing fabricators the freedom to design their own steam tables, these units hold hot food products at safe-serving temperatures.

- Without conduit and control box enclosure
- Thermostatic or infinite controls available
- With or without drains
- Full-size rectangular wells
- Standard and high watt models
- Available with optional square corners in lieu of standard round corners

NOTE: Fabricator models are not a CE offering, items are sold as components for fabricator self certification.

HWBRT-FULD
with accessory
food pan



HWBIRT-FULD with
accessory food pan



HWBIBRT-FULD with
accessory food pan

BUILT-IN FULL-SIZE RECTANGULAR WELLS FABRICATOR COMPONENTS

Model [■]	Description	Dimensions (Top Mount) W x D x H	Voltage	Watts	Ship Weight	List Price
Standard Watt						
HWBRT-FUL	Uninsulated Top or Bottom Mount	347 x 553 x 237 mm	220 or 240 [•]	1200	9 kg	\$772
HWBRT-FULD	Uninsulated Top or Bottom Mount w/Drain	347 x 553 x 237 mm	220 or 240 [•]	1200	9 kg	821
HWBRN-FUL	Uninsulated Top or Bottom Mount	347 x 553 x 237 mm	220 or 240 [•]	1200	9 kg	772
HWBRN-FULD	Uninsulated Top or Bottom Mount w/Drain	347 x 553 x 237 mm	220 or 240 [•]	1200	9 kg	821
HWBIRT-FUL	Insulated Top or Bottom Mount	347 x 553 x 236 mm	220 or 240 [•]	1200	11 kg	891
HWBIRT-FULD	Insulated Top or Bottom Mount w/Drain	347 x 553 x 236 mm	220 or 240 [•]	1200	12 kg	940
HWBIBRT-FUL	Insulated Bottom Mount Only	352 x 561 x 261 mm	220 or 240 [•]	1200	12 kg	891
HWBIBRT-FULD	Insulated Bottom Mount Only w/Drain	352 x 561 x 261 mm	220 or 240 [•]	1200	12 kg	940
High Watt						
HWBHRT-FUL	Uninsulated Top or Bottom Mount	347 x 553 x 237 mm	220 or 240 [•]	1650	10 kg	\$772
HWBHRT-FULD	Uninsulated Top or Bottom Mount w/Drain	347 x 553 x 237 mm	220 or 240 [•]	1650	8 kg	821
HWBHRN-FUL	Uninsulated Top or Bottom Mount	347 x 553 x 237 mm	220 or 240 [•]	1650	10 kg	772
HWBHRN-FULD	Uninsulated Top or Bottom Mount w/Drain	347 x 553 x 237 mm	220 or 240 [•]	1650	9 kg	821
HWBHIRT-FUL	Insulated Top or Bottom Mount	347 x 553 x 236 mm	220 or 240 [•]	1650	12 kg	891
HWBHIRT-FULD	Insulated Top or Bottom Mount w/Drain	347 x 553 x 236 mm	220 or 240 [•]	1650	13 kg	940
HWBHIBRT-FUL	Insulated Bottom Mount Only	352 x 561 x 261 mm	220 or 240 [•]	1650	13 kg	891
HWBHIBRT-FULD	Insulated Bottom Mount Only w/Drain	352 x 561 x 261 mm	220 or 240 [•]	1650	13 kg	940

■ "RT" added to model name indicates unit with thermostat control, lit rocker switch and 914 mm capillary. "RN" added to model name indicates unit with infinite switch control, pilot light and 914 mm leads.

• CE Mark not available.

All Built-In Full-Size Rectangular Fabricator Heated Well Models Feature:

Voltage: Single phase.

Models shipped with: EZ locking hardware for installation (top mounted only).

OPTIONS (available at time of purchase only)

HWB-LEAD-UR	Power Supply Lead Wire for "RN" Components (Lead Wire only – Conduit not included)	per 305 mm	\$13
HWB-SQUARE	Square Pan Corners (In lieu of standard round pan corners)	add	97

Control Options –

HWB-TSTAT-UR	Thermostat with 1829 mm Capillary for "RT" Components (in lieu of standard 914 mm, Thermostat only – Conduit not included)		62
---------------------	---	--	-----------

Square Corner



Standard Corner



H W B x x x - x D	
Heated Well Built-In	No Character = No Drain
No Character = Standard Wattage	D = Drain Equipped
H = High Wattage	FUL = Full-Size Pan
No Character = Non-insulated	RT = Thermostatic Control
I = Insulated Top Mount	(Fabricator Models Only)
IB = Insulated Bottom Mount	RN = Infinite Switch Control
	(Fabricator Models Only)

COUNTERTOP CUTOUT DIMENSIONS – PAGE 25
CONTROL OPTIONS – PAGE 25
ACCESSORIES – PAGES 34-35



July 1, 2022

Export Price List

Drop-In 4/3-Size Heated Wells – Fabricator Components

Having the same great features as all of the Hatco Heated Wells, plus the added benefit of allowing fabricators the freedom to design their own steam tables, these units hold hot food products at safe-serving temperatures.

- Without conduit and control box enclosure
- Thermostatic or infinite controls available
- With or without drains
- 4/3-size rectangular wells
- Standard and high watt models



HWBRT-43D with accessory food pans (single unit holding 4 third-size pans)

NOTE: Fabricator models are not a CE offering, items are sold as components for fabricator self certification.

Control Options

- Fabricator models feature thermostatic control with On/Off switch with light or infinite control with indicator light



Thermostatic control



Infinite control

CONTROL CUTOUT DIMENSIONS

Control	Width	Height
Thermostatic	54 mm	86 mm
Infinite	54 mm	86 mm

DROP-IN 4/3-SIZE RECTANGULAR WELLS FABRICATOR COMPONENTS

Model ■	Description	Dimensions W x D x H	Voltage	Watts	Ship Weight	List Price
Standard Watt						
HWBRT-43	Uninsulated	345 x 726 x 237 mm	220 or 240 •	1200	11 kg	\$871
HWBRT-43D	Uninsulated w/Drain	345 x 726 x 237 mm	220 or 240 •	1200	10 kg	920
HWBRN-43	Uninsulated	345 x 726 x 237 mm	220 or 240 •	1200	10 kg	871
HWBRN-43D	Uninsulated w/Drain	345 x 726 x 237 mm	220 or 240 •	1200	10 kg	920
High Watt						
HWBHRT-43	Uninsulated	345 x 726 x 237 mm	220 or 240 •	1650	14 kg	\$871
HWBHRT-43D	Uninsulated w/Drain	345 x 726 x 237 mm	220 or 240 •	1650	10 kg	920
HWBHRN-43	Uninsulated	345 x 726 x 237 mm	220 or 240 •	1650	14 kg	871
HWBHRN-43D	Uninsulated w/Drain	345 x 726 x 237 mm	220 or 240 •	1650	15 kg	920

■ "RT" added to model name indicates unit with thermostat control, lit rocker switch and 914 mm capillary.

"RN" added to model name indicates unit with infinite switch control, pilot light and 914 mm leads.

• CE Mark not available.


All Drop-In 4/3-Size Rectangular Fabricator Heated Well Models Feature:

Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation.

OPTIONS (available at time of purchase only)

HWB-LEAD-UR	Power Supply Lead Wire for "RN" Components (Lead Wire only – Conduit not included)	per 305 mm \$13
Control Options –		
HWB-TSTAT-UR	Thermostat with 1829 mm Capillary for "RT" Components (in lieu of standard 914 mm, Thermostat only – Conduit not included)	62

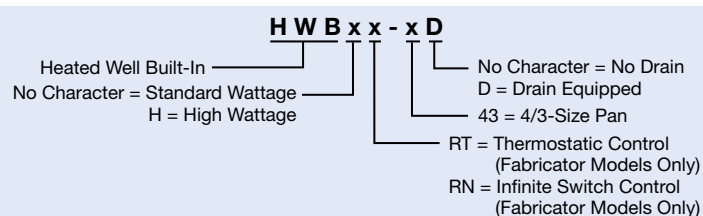

COUNTERTOP CUT-OUT DIMENSIONS – PAGE 25
ACCESSORIES – PAGES 34-35

Drop-In Round Heated Wells – Fabricator Components

Ideal for the fabricator who wants to design a specific steam table layout. Easy to install, and easy to service, the Round Heated Wells come with control, size, drain and wattage choices.

NOTE: Fabricator models are not a CE offering, items are sold as components for fabricator self certification.

- 4-, 7- and 10-liter round wells
- With or without drain
- Thermostatic or infinite controls available
- Standard or high watt (4-Liter standard watt only)



Control Options

- Fabricator models feature thermostatic control with On/Off switch with light or infinite control with indicator light



CONTROL CUTOUT DIMENSIONS

Control	Width	Height
Thermostatic	54 mm	86 mm
Infinite	54 mm	86 mm

DROP-IN ROUND FABRICATOR WELLS COMPONENTS – UNINSULATED

Model #	Description	Dimensions (Dia. x H)	Voltage	Watts	Ship Weight	List Price
4-Liter (4-Quart) – Standard Watt						
HWBRT-4QT	Top Mount	212 x 270 mm	220, or 240*	600	4 kg	\$730
HWBRT-4QTD	Top Mount w/Drain	212 x 270 mm	220, or 240*	600	4 kg	779
HWBRN-4QT	Top Mount	212 x 270 mm	220, or 240*	600	3 kg	730
HWBRN-4QTD	Top Mount w/Drain	212 x 270 mm	220, or 240*	600	5 kg	779
7-Liter (7-Quart) – Standard Watt						
HWBRT-7QT	Top Mount	262 x 244 mm	220, or 240*	600	5 kg	\$730
HWBRT-7QTD	Top Mount w/Drain	262 x 244 mm	220, or 240*	600	5 kg	779
HWBRN-7QT	Top Mount	262 x 244 mm	220, or 240*	600	3 kg	730
HWBRN-7QTD	Top Mount w/Drain	262 x 244 mm	220, or 240*	600	5 kg	779
7-Liter (7-Quart) – High Watt						
HWBHRT-7QT	Top Mount	262 x 244 mm	220, or 240*	800	5 kg	\$730
HWBHRT-7QTD	Top Mount w/Drain	262 x 244 mm	220, or 240*	800	4 kg	779
HWBHNR-7QT	Top Mount	262 x 244 mm	220, or 240*	800	3 kg	730
HWBHNR-7QTD	Top Mount w/Drain	262 x 244 mm	220, or 240*	800	6 kg	779
10-Liter (11-Quart) – Standard Watt						
HWBRT-11QT	Top Mount	313 x 244 mm	220, or 240*	600	5 kg	\$730
HWBRT-11QTD	Top Mount w/Drain	313 x 244 mm	220, or 240*	600	5 kg	779
HWBRN-11QT	Top Mount	313 x 244 mm	220, or 240*	600	5 kg	730
HWBRN-11QTD	Top Mount w/Drain	313 x 244 mm	220, or 240*	600	5 kg	779
10-Liter (11-Quart) – High Watt						
HWBHRT-11QT	Top Mount	313 x 244 mm	220, or 240*	800	7 kg	\$730
HWBHRT-11QTD	Top Mount w/Drain	313 x 244 mm	220, or 240*	800	5 kg	779
HWBHNR-11QT	Top Mount	313 x 244 mm	220, or 240*	800	5 kg	730
HWBHNR-11QTD	Top Mount w/Drain	313 x 244 mm	220, or 240*	800	6 kg	779

* "RT" added to model name indicates unit with thermostat control, lit rocker switch and 914 mm capillary. "RN" added to model name indicates unit with infinite switch control, pilot light and 914 mm leads. "D" added to model name indicates unit with drain.

* CE Mark not available.


All Drop-In Round Fabricator Heated Well Models Feature:

Voltage: Single phase.

Models Shipped with: EZ locking hardware for installation.

OPTIONS (available at time of purchase only), Fabricator Components Only –

HWB-LEAD-UR	Power Supply Lead Wire for "RN" Components (Lead Wire only – Conduit not included)	per 305 mm	\$13
Control Options –			
HWB-TSTAT-UR	Thermostat with 1829 mm Capillary for "RT" Components (in lieu of standard 914 mm, Thermostat only – Conduit not included)		62

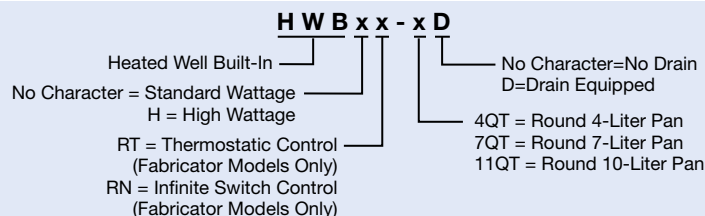


COUNTERTOP CUT-OUT DIMENSIONS – PAGE 25
CONTROL OPTIONS – PAGE 25
ACCESSORIES – PAGES 34-35

Heated Well Accessories *(available for purchase at any time)*



FTB-2
with accessory
full-size
sheet pans

HWBI-2
with accessory
half and third-size
food pans

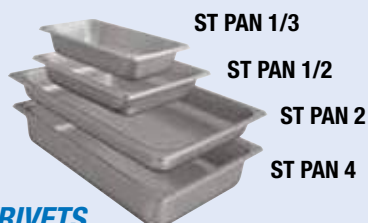

PANS – LIDS – TRIVETS

ST PAN 1/3	Third-Size Stainless Steel Pan – 324 W x 175 D x 64 H mm	\$ 64
ST PAN 1/2	Half-Size Stainless Steel Pan – 324 W x 264 D x 64 H mm	74
ST PAN 2	Full-Size Stainless Steel Pan – 324 W x 527 D x 64 H mm	88
ST PAN 4	Full-Size Stainless Steel Pan – 324 W x 527 D x 102 H mm	110
HDW 6" PAN	Full-Size Stainless Steel Pan – 324 W x 527 D x 152 H mm	120
4QT-PAN	4-Liter Round Pan	114
7QT-PAN	7-Liter Round Pan	127
11QT-PAN	10-Liter Round Pan	139

Notched Lid for Round Pans –


4QT-LID-1	4-Liter Round, Notched, Solid Lid	\$54
7QT-LID-1	7-Liter Round, Notched, Solid Lid	66
11QT-LID-1	10-Liter Round, Notched, Solid Lid	79

Hinged Lid for Round Pans –

4QT-LID	4-Liter Round, Hinged and Notched Lid	\$ 71
7QT-LID	7-Liter Round, Hinged and Notched Lid	93
11QT-LID	10-Liter Round, Hinged and Notched Lid	116

Wire Trivets Stainless –

TRIVET (1/2)SS	Half-Size – 259 W x 194 D mm	\$119
TRIVET SS	Full-Size – 259 W x 457 D mm	165

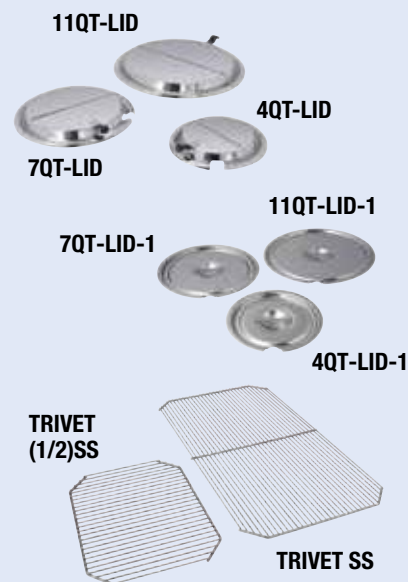

ADAPTERS, SUPPORT BARS, MOUNTING KITS, VALVES – PAGE 35

Heated Well Accessories

(available for purchase at any time)

HWB-2-7Q
shown with two
7QT-PAN and
7QT-LID-1



HWB-2-7Q



HWB-2-11Q




HWB-3-4Q

ADAPTERS – SUPPORT BARS

HWB-2-7Q	Adapter to convert warmer to hold two 7-Liter Inserts (HWB and HWBI Rectangular, HWBI and HWBI-S Modular Heated Wells only)	\$ 98
HWB-3-4Q	Adapter to convert warmer to hold three 4-Liter Inserts (HWB and HWBI Rectangular, HWBI and HWBI-S Modular Heated Wells only)	98
HWB-2-11Q	Adapter to Convert warmer to hold two 10-Liter Inserts (HWB-43 Rectangular and HWBI43 Modular Heated Wells only)	123
HWB12BAR	305 mm Pan Support Bar for Built-In and Drop-In Heated Wells	21
HWB20BAR	508 mm Pan Support Bar for Built-In and Drop-In Heated Wells	25
HWBGM12BAR	305 mm Pan Support Bar for Drop-In Modular/Ganged Models	21
HWBGM20BAR	508 mm Pan Support Bar for Drop-In Modular/Ganged Models	25

Support Bars

Choose the appropriate
kit for HWBI or
HWB series



HWB-FUL-MNT
Choose the appropriate kit for
HWB-FUL, HWB-43 or HWB-4Q,
-7Q, -11Q series



**HWB-MNT-REC or
HWB-MNT-RND**



HWBI2MANIF



BALLVALVE1INCH

MOUNTING KITS – VALVES

Necessary at your Well installation –

HWB-FUL-MNT	Mounting Kit for combustible countertops for HWB-FUL series only	\$126
HWB-43-MNT	Mounting Kit for combustible countertops for HWB-43 series only	151
HWB-4Q-MNT	Mounting Kit for combustible countertops for HWB-4Q series only	75
HWB-7Q-MNT	Mounting Kit for combustible countertops for HWB-7Q series only	82
HWB-11Q-MNT	Mounting Kit for combustible countertops for HWB-11Q series only	89
HWB-MNT-REC	Kit allows mounting to thick countertops - 8 Brackets (HWBI and HWB Rectangular Heated Wells, HWBI Modular Heated Wells only)	90
HWB-MNT-RND	Kit allows mounting to thick countertops - 4 Brackets (Round Heated Wells only)	45

External Manifold includes Individual Ball Valve for each Well (HWBI only, not available for the Slim models) –

HWBI2MANIF	2-Pan Accessory	\$ 930
HWBI3MANIF	3-Pan Accessory	1320
HWBI4MANIF	4-Pan Accessory	1709
HWBI5MANIF	5-Pan Accessory	2099
HWBI6MANIF	6-Pan Accessory	2489

Necessary at your Well Installation –

BALLVALVE3/4	High Temperature 3/4" NPT Ball Valve for units with Individual Drain(s) and no Manifold	\$117
BALLVALVE1INCH	High Temperature 1" NPT Ball Valve for units with Manifold Drain (Ganged Heated Wells only)	90
GATEVALVE3/4IN	High Temperature 3/4" NPT Gate Valve for units with Individual Drain(s) and no Manifold	135
GATEVALVE1IN	High Temperature 1" NPT Gate Valve for units with Manifold Drain (Ganged Heated Wells only)	200
HWB-RDHV	Heated Well Remote Handle for 3/4" Drains only and includes a Ball Valve	463



GATEVALVE1INCH



HWB-RDHV
Attaches to
3/4" Drain and
includes a
Ball Valve

Decorative Lamps & Display Lights

*Cafeterias • Convenience Stores
Supermarkets & Delis • Restaurants & Cafés
Clubs & Bars • Concessions*



DL-1100-SR in Clear Brushed Metal
Gloss finish *pg. 39-41*



DL-400-SN in Glossy Gray
Gloss finish *pg. 39-41*




DL-500-SR in Bright Brass
Plated finish *pg. 39-41*



DL-800-SR in Designer color Warm Red
pg. 39-41



DL-725-RL in Bright Nickel
Plated finish *pg. 39-41*

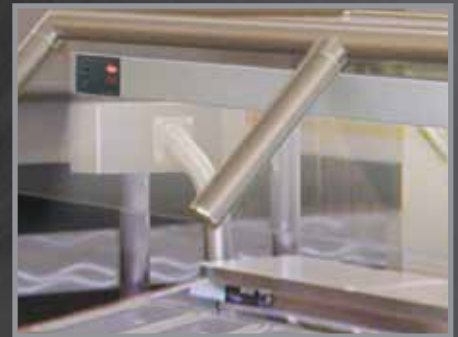

HL-54 (sneeze guards not available) *pg. 43*



HL5-60 in Standard Clear Anodized finish (sneeze
guards not available) *pg. 44*



ORDERING INSTRUCTIONS

Luminaire lamps are for lighting only. LUMINAIRE option must be specified when lamps are utilized for decorative purposes only (no heating). This option is not field convertible. Maximum 100 watts.

CLEARANCE REQUIREMENTS

NOTE: Install 240V, 250W bulb no closer than 76.2 mm from a sidewall and no closer than 406 mm above a combustible surface, or no closer than 127 mm to a non-combustible surface.



NOTE: Install HIGH WATT 240V, 375W bulb no closer than 76.2 mm from a sidewall and no closer than 686 mm above a combustible surface, or no closer than 432 mm to a non-combustible surface (240V, 375W bulb not available).

NOTE: Multiple installations of Decorative Lamps must have a minimum of 305 mm on center of shade between each unit.

Specify the following information with your order:

- Electrical:** Voltage 240V single phase and Wattage 100W (Luminaire), 250W (Standard), or 375W (High) Watts
- Mounting Style Code:** AS, C, R, S
- Switch Location Code:** Lower (L), None (N), Remote (R) or Upper (U). DLH models must have remote switch or none
- Shade Style Code:** -400, -500, -600, -700, -725, -750, -760, -775, -800, -1100, -1400, -1500
- Shade and Canopy Colors:** Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper, Smooth White, Gleaming Gold, Glossy Gray, Bold Black, Radiant Red* (lampshade only), Brilliant Blue* (lampshade only), Clear Coat Brushed Metal* (lampshade only), Bright Brass*, Bright Nickel*, Bright Copper*, Antique Nickel*, Antique Brass*, Antique Bronze*
- Overall Unit Length:** For C, S or AS Mounts, from ceiling to bottom of warmer lamp shade
- Clearance:** From bulb to surface (see **NOTE** Clearance Requirements above)
- Accessory Bulb Color/Coating:** 40W Clear Coated (Luminaire only)
250W Clear Uncoated or Clear Coated
- Optional Cord Color:** Black (standard), White (optional)

* Special process required and extended lead times, see page 41 for additional charge.
Specify your appropriate accessories with your order.

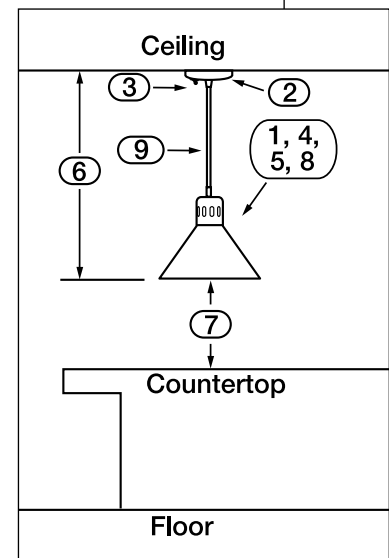

Decorative Lamps/Luminaires


Hatco Decorative Lamps provide radiant heat to briefly hold food warm at kitchen work areas, wait staff pickup stations or customer serving points, while enhancing your décor. Versatile enough for any location, the range of lights are available with a selection of personalized choices: shade styles, colors, switch locations and mounting arrangements. Configurations for lighting (Luminaire), as well as foodwarming, are available.

NOTE: Decorative Lamps and Luminaires are non-returnable.

- Decorative Lamps and Luminaires available in twelve shade styles
- Four different mounting arrangements to choose from
- Seven *Designer* colors, seven Gloss finishes and six Plated finishes available
- Four power switch options:
 - Upper (on canopy)
 - Lower (at stem)
 - Remote
 - None
- Available for food holding and display or lighting only applications
- Low and standard bulbs available in certain voltages, see accessories on page 42 (bulb not included in unit price)

Rigid and Adjustable Stem Mounts in unit color (except for Gloss finishes Radiant Red, Brilliant Blue and Clear Brushed Metal)

Black cord is standard (white cord optional)
Various cord lengths available, starting at 432 mm, while retractable can vary

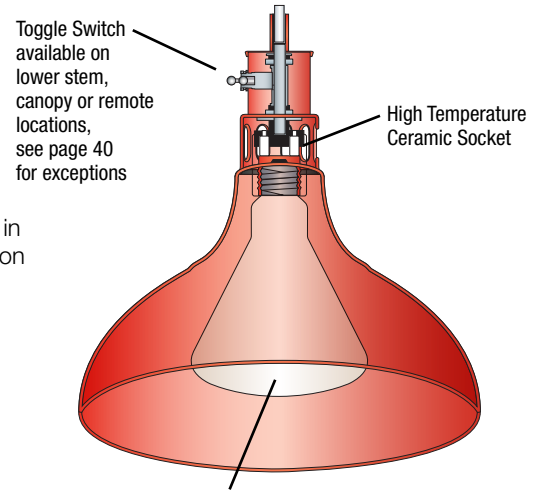

Bulbs for:
40W clear, coated (Luminaire or DLL models only, 240V)
250W DL clear, uncoated or coated

Build A Decorative Lamp

Hatco has given you a variety of simple and easy ways to "Build Your Decorative Lamp." You can go online or quickly do the work tables of "How to Build Your Lamp" on pages 39 through 41.

- GO online at: www.hatcocorp.com and click on "Build a Lamp" in the header. (Download a PDF of your lamp configuration in color and a Hatco List Price Quote)
- OR follow the six steps in the Hatco Price List (next three pages) to build your Hatco model code and List Price.



Hatco Website shown, click on "Build a Lamp" in the header and configure your choices



Now you can develop your own Hatco Decorative Lamp solutions with our online lamp configurator.

Visit www.hatcocorp.com
Click on "Build a Lamp"

HOW TO BUILD A LAMP

DLH-775-CR

Decorative Lamp
High Wattage
Shade Style

Switch Type/Location
Mounting Style

Specify the following options when ordering:

1 Electrical	DLH	(High Watt - 375 watt max)	No Charge
2 Mounting Style	C	(Cord Mount)	No Charge
3 Switch Location	R	(Remote Switch Location)	No Charge
4 Shade Style	-775	(See Shade Style on page 40)	\$460
5 Shade Color	BBRASS	(Bright Brass Plated Finish)	191
6 Overall Length	2032 mm	(Overall Length) - Only C mounts and over 1829 mm	24

(Specify to the nearest inch - CL, CU, ASL, ASU, SL, SU mounts only).

TOTAL \$653

Information indicated in red are items that the customer must enter. *Bulbs are not included.*

Build A Decorative Lamp Configurator Worksheet

Complete the six steps on this worksheet to configure your Hatco model code and List Price. In order to get exactly what you need in the least amount of time, have this handy when ordering your Hatco Decorative Lamp.



BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEPS 1 AND 2

(To determine your total list price and model code, pick all your options - bulb not included)

STEP 1: ELECTRICAL

240V (CE Mark available at no added charge)		
Voltage		No Charge
Wattage		No Charge
DLL- Luminaire	100 watt max	
DL- Standard	250 watt max	
DLH- High Watt	375 watt max	





STEP 2: MOUNTING STYLE

Mounting Style –

AS	Adjustable Stem mount (Limited height adjustment at install only, mount with rigid stem mount to canopy)	\$174
C	Cord (specify Cord Color)	No Charge
R	Retractable (specify Cord Color)	284
S	Stem	77



Aluminum Plated Coupler provides a high strength hold for the Adjustable Stem Mount

MOUNTING STYLES		SPECIFY the:	Shade Height											
			216 mm	267 mm										
CORD	C Mount Cord Mount to canopy. 	Overall Length	432 mm to any length	483 mm to any length										
	R Mount Retractable Cord Mount. 	Adjusts to a maximum and minimum according to shade height	787 to 1765 mm	838 to 1816 mm										
STEM	S Mount Rigid Stem Mount to canopy. 	Overall Length	356 to 1803 mm	406 to 1854 mm										
ADJUSTABLE	Review Switch Locations in Step 3 on next page to determine your appropriate model code.													
	AS Mount <u>At install only</u> , limited height adjustments with Rigid Stem Mount to canopy. 	Adjustable Overall Length (at install only)	ASU, ASR, ASN											
			<table><tr><td>356 to 406 mm</td><td>407 to 457 mm</td></tr><tr><td>406 to 495 mm</td><td>457 to 546 mm</td></tr><tr><td>508 to 686 mm</td><td>559 to 737 mm</td></tr><tr><td>686 to 1067 mm</td><td>737 to 1118 mm</td></tr><tr><td>1067 to 1829 mm</td><td>1118 to 1880 mm</td></tr></table>		356 to 406 mm	407 to 457 mm	406 to 495 mm	457 to 546 mm	508 to 686 mm	559 to 737 mm	686 to 1067 mm	737 to 1118 mm	1067 to 1829 mm	1118 to 1880 mm
356 to 406 mm	407 to 457 mm													
406 to 495 mm	457 to 546 mm													
508 to 686 mm	559 to 737 mm													
686 to 1067 mm	737 to 1118 mm													
1067 to 1829 mm	1118 to 1880 mm													
			ASL											
			<table><tr><td>406 to 432 mm</td><td>457 to 483 mm</td></tr><tr><td>457 to 559 mm</td><td>508 to 610 mm</td></tr><tr><td>559 to 711 mm</td><td>610 to 762 mm</td></tr><tr><td>737 to 1092 mm</td><td>788 to 1143 mm</td></tr><tr><td>1118 to 1854 mm</td><td>1169 to 1905 mm</td></tr></table>		406 to 432 mm	457 to 483 mm	457 to 559 mm	508 to 610 mm	559 to 711 mm	610 to 762 mm	737 to 1092 mm	788 to 1143 mm	1118 to 1854 mm	1169 to 1905 mm
406 to 432 mm	457 to 483 mm													
457 to 559 mm	508 to 610 mm													
559 to 711 mm	610 to 762 mm													
737 to 1092 mm	788 to 1143 mm													
1118 to 1854 mm	1169 to 1905 mm													

Go to next page for Steps 3-4.

NOTE: Decorative Lamps and Luminaires are non-returnable.

D L x - x x x x - x x x	
Decorative Lamp	Switch Location
No Character = Standard Watt	Mounting Style
L=Luminaire Low Watt	Shade Style
H = High Wattage	


Build A Decorative Lamp Configurator Worksheet

Continued from page 39

BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEPS 3 AND 4
(To determine your total list price and model code, pick all your options - bulb not included)




SWITCH LOCATIONS



L - Lower Switch


Not available on:

- DLH (high watt models)



R - Remote Switch

- Accommodates 16 amps
- Up to seven 250W lamps, or five 375W lamps maximum per remote switch



U - Upper Switch

Not available on:

- DLH (high watt models)
- R Mount


STEP 3: SWITCH LOCATION

Switch Location –

No Charge

L	Lower (not available on high watt models)
N	None
R	Remote
U	Upper (not available on high watt models)

SHADE STYLES (height and width shown)

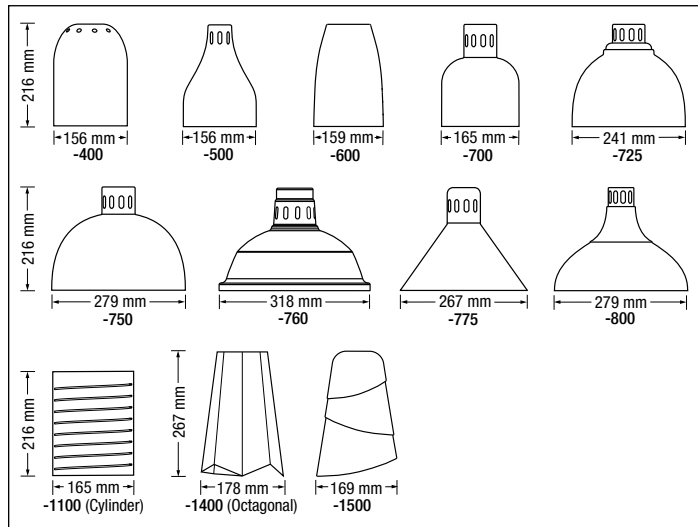

STEP 4: SHADE STYLE

Shade Code

Ship Weight

(dependent on components)

List Price

-400	3-5 kg	\$421
-500	3-5 kg	421
-600	3-5 kg	421
-700	3-5 kg	421
-725	3-5 kg	\$460
-750	3-5 kg	460
-760	3-5 kg	460
-775	3-5 kg	460
-800	3-5 kg	460
-1100	3-5 kg	460
-1400	3-5 kg	460
-1500	3-5 kg	\$524

Go to next page for Steps 5-6.

NOTE: Decorative Lamps and
Luminaires are non-returnable.

DLx - xxx - xxx

Decorative Lamp
No Character = Standard Watt
L=Luminaire Low Watt
H = High Wattage
Switch Location
Mounting Style
Shade Style

Build A Decorative Lamp Configurator Worksheet

Continued from page 40

BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEPS 5 AND 6

(To determine your total list price and model code, pick all your options - bulb not included)

Visit www.hatcocorp.com
Click on "Build a Lamp"Decorative Lamps &
Display Lights

STEP 5: SHADE AND CANOPY COLORS*

Shade and Canopy Colors –

Designer Colors

RED	Warm Red	NAVY	Navy Blue
BLACK	Black	GREEN	Hunter Green
GRAY	Gray Granite	COPPER	Antique Copper
WHITE	White Granite		

No Charge

Gloss Finishes

SWHITE	Smooth White	GGRAY	Glossy Gray
GGOLD	Gleaming Gold	BBLACK	Bold Black

No Charge

*Gloss Finishes for Shade Only – (must choose other finish for remainder of unit) – Special Process Required and Extended Lead Times –

RRED	Radiant Red
BBLUE	Brilliant Blue
CL-COAT	Clear Brushed Metal


Plated Finishes –

Special Process Required and Extended Lead Times –

BBRASS	Bright Brass	\$191
BNICKEL	Bright Nickel	191
BCOPPER	Bright Copper	191
ANICKEL	Antique Nickel	191
ABRASS	Antique Brass	191
ABRONZE	Antique Bronze	191

SHADE AND CANOPY COLORS

Designer Colors




Gloss Finishes



*Gloss Finishes for Shade Only – Special Process Required and Extended Lead Times



Plated Finishes – Special Process Required and Extended Lead Times



*Exception: DL-1500 for Shade Only –



*Gloss and Plated Finishes – Special Process Required and Extended Lead Times

Printed colors are a representation and may not exactly match our Designer, Gloss and Plated Finishes.

STEP 6: OVERALL LENGTH


Overall Length – For C Mounts from ceiling to bottom of lamp shade.
(specify exact length in whole numbers).

Up to 1829 mm	No Charge
Greater than 1829 mm (C mount only)	\$24

YOUR TOTAL LIST PRICE AND MODEL CODE

Add the total costs of options below (not for retrofit – bulb not included) –

Step 1	Electrical	\$ 0.00
Step 2	Mounting Style	
Step 3	Switch Location	0.00
Step 4	Shade Style	
Step 5	Shade and Canopy Colors	
Step 6	Overall Length	
Your Total Price		\$

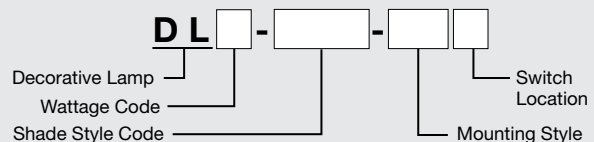

NOTE: Decorative Lamps and
Luminaires are non-returnable.

BULBS AND ACCESSORIES – PAGE 42



DL-750-RL in
Clear Brushed
Metal shade finish
and canopy unit in
Designer Black

OPTIONS *(available at time of purchase only)*

DL-CORD-WHITE	White Cord (C=Cord, R=Retractable Mounts Only) (Black is standard)	No Charge
Leads – For any Stem Mount or Adjustable Stem Mount unit, must specify Lead Length –		
LEADS5	305-1524 mm Extended Electrical Leads	\$ 27
LEADS10	1829-3048 mm Extended Electrical Leads	54
LEADS15	3353-4572 mm Extended Electrical Leads	81
LEADS20	4877-6096 mm Extended Electrical Leads	108

ACCESSORIES *(available for purchase at any time)*

DL-SWITCH-16AMP	16 Amp Lamp Toggle Switch	each \$22
WHITE-CTD-240L	240 Volt, 40 Watt Clear Bulb, Coated (Luminaire models only)	each 16
WHITE-UCTD-240	240 Volt, 250 Watt Clear Bulb, Uncoated	each 65
WHITE-CTD-240	240 Volt, 250 Watt Clear Bulb, Coated	each 78

NOTE: Decorative Lamps and
Luminaires are non-returnable.

WHITE uncoated



WHITE coated

WHITE-CTD-240L



Glo-Rite® Display Lights

Let the light shine on your work surface or display areas with Glo-Rite® Display Lights. Durable and effective, Hatco light strips are made of extruded aluminum housings with bright-annealed reflectors for maximum brightness.

- Incandescent bulbs with special protective coating to guard against food contamination
- Extra lamps available on models from 610 to 1829 mm
- Optional *Designer* colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green or Antique Copper



Decorative Lamps &
Display Lights

HL-24-2 including extra lamp assembly with lamps on 305 mm centers standard

GLO-RITE DISPLAY LIGHTS

Model	Voltage Single Phase	No. of Bulbs	Width	Watts	Ship Weight	List Price 220, 240V†
HL-18	220 or 240	2	457 mm	120	3 kg	\$ 418
HL-24	220 or 240	2	610 mm	120	3 kg	441
HL-24-2	220 or 240	3	610 mm	180	3 kg	497
HL-30	220 or 240	2	762 mm	120	3 kg	464
HL-30-2	220 or 240	4	762 mm	240	4 kg	548
HL-36	220 or 240	3	914 mm	180	4 kg	527
HL-36-2	220 or 240	5	914 mm	300	4 kg	620
HL-42	220 or 240	3	1067 mm	180	5 kg	550
HL-42-2	220 or 240	6	1067 mm	360	5 kg	670
HL-48	220 or 240	4	1219 mm	240	5 kg	613
HL-48-2	220 or 240	7	1219 mm	420	5 kg	742
HL-54	220 or 240	4	1372 mm	240	5 kg	636
HL-54-2	220 or 240	8	1372 mm	480	6 kg	792
HL-60	220 or 240	5	1524 mm	300	6 kg	699
HL-60-2	220 or 240	9	1524 mm	540	6 kg	864
HL-66	220 or 240	5	1676 mm	300	6 kg	779
HL-66-2	220 or 240	10	1676 mm	600	7 kg	964
HL-72	220 or 240	6	1829 mm	360	7 kg	859
HL-72-2	220 or 240	10	1829 mm	600	10 kg	1056

† CE Mark available at no added charge.

All Display Light Models Feature:

Toggle Switch (max. 15 amps) Location: Chef's left side (unless otherwise specified).

Leads: 152 mm leads – server's right.

Dimensions: 76 D x 64 H mm.

OPTIONS (available at time of purchase only)

NO BULB	No Bulb	No Charge
REM TOG	Remote Toggle Switch (max. 15 Amps)	No Charge
Leads – Must specify Lead Length –		
LEADS5	305-1525 mm Extended Electrical Leads	\$ 27
LEADS10	1829-3048 mm Extended Electrical Leads	54
LEADS15	3352-4572 mm Extended Electrical Leads	81
LEADS20	4877-6096 mm Extended Electrical Leads	108

ACCESSORIES (available for purchase at any time)

HL-BRKT	Adjustable Angle Bracket	pair \$30
LED Bulbs (230V) –		
CLED-2700-230	Chef LED Bulb (similar to warm Incandescent light)	each \$129
CLED-3000-230	Chef LED Bulb (similar to warm Halogen light)	each 129
CLED-4000-230	Chef LED Bulb (similar to cool Fluorescent light)	each 129

HL-BRKT Accessory




OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable –

RED	Warm Red	per 305 mm	\$32
BLACK	Black	per 305 mm	32
GRAY	Gray Granite	per 305 mm	32
WHITE	White Granite	per 305 mm	32
NAVY	Navy Blue	per 305 mm	32
GREEN	Hunter Green	per 305 mm	32
COPPER	Antique Copper	per 305 mm	32



CLED-3000 or -4000 Accessory



COLORS AND FINISHES – INSIDE BACK COVER



Glo-Rite® Curved Display Lights

A stylish choice for illuminating your serving area. The Glo-Rite® Curved Display Light offers the highest light output that is ideal for illuminating food products with either a warm white light (3050K) or a cool or neutral white light (4100K).

Hatco provides you with a wide variety of colors and lengths for any serving area.

- Features a patented curved housing design with energy efficient dual LED lights across the display lamp that provide longer performance and energy savings (compared to standard incandescent bulbs)
- Lengths available from 457-1829 mm in 152 mm increments

- Field replaceable dual LED lights
- Matches the Hatco line of Glo-Ray® Curved Infrared Strip Heaters for a fully integrated look
- Angle brackets and 152 mm LED leads are standard
- Optional non-adjustable tubular stands and top or bottom mounting stands available

HL5-36
Clear Anodized (standard)
shown in top and
underside views



GLO-RITE® CURVED DISPLAY LIGHTS

Model	Width	Voltage Single Phase	Watts	Ship Weight	List [†] Price
HL5-18	457 mm	220 or 240	4.3	4 kg	\$1110
HL5-24	610 mm	220 or 240	5.9	6 kg	1211
HL5-30	762 mm	220 or 240	7.6	6 kg	1312
HL5-36	914 mm	220 or 240	9.2	6 kg	1413
HL5-42	1067 mm	220 or 240	10.8	6 kg	1514
HL5-48	1219 mm	220 or 240	12.4	7 kg	1615
HL5-54	1372 mm	220 or 240	14.0	8 kg	1716
HL5-60	1524 mm	220 or 240	15.7	8 kg	1817
HL5-66	1676 mm	220 or 240	17.3	9 kg	1918
HL5-72	1829 mm	220 or 240	18.9	9 kg	2019

[†] CE Mark available at no added charge.

All Curved Display Light Models Feature:

Voltage: 220-240, single phase.

Models Shipped with: End panels, angle brackets with rocker switch under unit on power side.

Leads: 152 mm leads - on power side.

Dimensions: 457 mm-1829 mm W x 152 mm D x 77 mm H (height includes standard angle bracket).

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable Clear Anodized Standard –

RED	Warm Red	per 305 mm	\$32
BLACK	Black	per 305 mm	32
GRAY	Gray Granite	per 305 mm	32
WHITE	White Granite	per 305 mm	32
NAVY	Navy Blue	per 305 mm	32
GREEN	Hunter Green	per 305 mm	32
COPPER	Antique Copper	per 305 mm	32

Gloss Finishes – Non-standard colors are non-returnable

GGOLD	Gleaming Gold	per 305 mm	\$44
GGRAY	Glossy Gray	per 305 mm	44
BBLACK	Bold Black	per 305 mm	44
RRED	Radiant Red	per 305 mm	44
BBLUE	Brilliant Blue	per 305 mm	44

LED Light –

HL5-3050	Warm White (3050K)	Standard
HL5-4100	Cool or Neutral White (4100K)	No Charge

OPTIONS (available at time of purchase only)

LED Leads (must specify LED Lead Length) –

HL5-LEAD5	1524 mm total LED Lead Length (includes a 914 mm conduit)	\$37
HL5-LEAD6	1829 mm total LED Lead Length (includes a 914 mm conduit)	47
HL5-LEAD7	2134 mm total LED Lead Length (includes a 914 mm conduit)	57
HL5-LEAD8	2438 mm total LED Lead Length (includes a 914 mm conduit)	67
HL5-LEAD9	2743 mm total LED Lead Length (includes a 914 mm conduit)	77
HL5-LEAD10	3048 mm total LED Lead Length (includes a 914 mm conduit)	87
HL5-CORD	1829 mm Cord with Plug (Schuko 7/7, BS-1363)	37

Non-Adjustable Anodized Stands – Clear Anodized Standard

Bottom Mount Leg –

NTL5-10, -12	Bottom mount installation (specify 254 mm or 305 mm clearance)	1 pair \$166
NTL5-14, -16	Bottom mount installation (specify 356 mm or 406 mm clearance)	1 pair 207

Side Mount Leg –

SNTL5-10T, -12T	Top mount installation (specify 254 mm or 305 mm clearance)	\$223
SNTL5-14T, -16T	Top mount installation (specify 356 mm or 406 mm clearance)	254
SNTL5-10B, -12B	Bottom mount installation (specify 254 mm or 305 mm clearance)	223
SNTL5-14B, -16B	Bottom mount installation (specify 356 mm or 406 mm clearance)	254

Designer color or Gloss Finish for Non-Adjustable Tubular Stands –

NTL5-PAINT	Non-standard colors are non-returnable –	1 pair \$46
------------	--	-------------

HL5 - x x

Glo-Rite Curved Display Light Aluminum Housing Width (Inches)



Save money lighting your
Hatco Glo-Ray® Strip Heater



GREEN ENERGY




Commit to going green in your foodservice operation with Hatco's patented Chef LED Bulbs! Heat strengthened glass lens protects the Light Emitting Diode (LED) while the exterior is made of rugged aluminum and prevents breakage of the components due to incidental contact in a busy kitchen environment. A Chef LED Bulb has substantial benefits and energy savings over other bulbs and are directional, so you can adjust it to your ideal setting.



Other features include:

- Designed to operate in high temperature areas
- Unique design allows operation over a steam table
- Illuminates instantly and can be rotated to showcase food below
- Average of 184% increased light output, based on Foot Candle average delivered to surface from a height of 305 mm vs. 40 watt incandescent bulb
- Up to 91% energy savings vs. 40 watt incandescent bulb

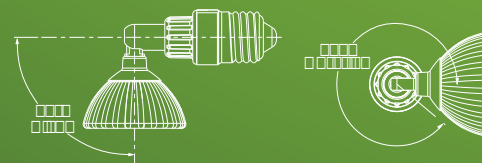

Go to www.hatcocorp.com and download the LED Cost Savings & Energy Analysis calculator to review your energy savings potential.



Scan to see how easy it is to install the Chef LED bulb, and direct the light, in your foodwarmer.

**CLED-2700
(Warm Light)**

3.5 watt

25,000 Hours*

Closest kelvin
Incandescent

**CLED-3000
(Warm Light)**

3.5 watt

25,000 Hours*

Closest kelvin
Halogen

**CLED-4000
(Cool Light)**

3.5 watt

25,000 Hours*

Closest kelvin
Fluorescent Tube

**BULB:
Halogen**

60 watt

1,500 Hours

**BULB:
Incandescent***

40 watt

3,000 Hours

* With 75°C ambient air temperature.

Used in HL, GRAL, GRAHL, GRAL-xxD, GRAHL-xxD, GRAIHL, GRAML, GR2AL, GR2AHL, GR2AL-xxD, GR2AHL-xxD, UGAL, UGAHL, UGAL-xxD, and UGAHL-xxD models.
Please contact factory for the most up-to-date listing of models that can use Chef LED Bulbs.

Strip Heaters

*Cafeterias • Buffets • Supermarkets & Delis
Restaurants & Cafés • Clubs & Bars*



GR5AL-60 model in optional Radiant Red Gloss Finish above a **GRSB-54-I** pg. 50



GRA-36D pg. 55



GRAH-42D with optional 152 mm spacer and optional non-adjustable tubular stands pg. 55



GRAL-72D with optional non-adjustable tubular stands pg. 56



GRAHL-96D with optional *Designer Black* and non-adjustable tubular stands pg. 56



GRNH-48 with standard angle brackets and optional *Designer Warm Red* (Sneeze Guards as shown not available) pg. 58



GRAIHL-48 requires Remote Control Enclosure (RMB) pg. 60



GR2AHL-84 with optional *Designer Black* housing and Sneeze Guards pg. 64




UGA-42D in optional Radiant Red Gloss Finish housing pg. 70

Ordering Instructions – Watch *How To Order A Hatco Strip Heater* on Hatco's website under Resources, Video Library

QUICK GUIDE – FOR ANY CLEARANCE – Detailed mounting and spacing requirements found on page 73


NARROW CLEARANCE Infra-Black®

- Provides a very even and thermostatically controlled heat source
- For applications where the distance from the heat source to the target is narrow




STANDARD CLEARANCE Infrared Metal Sheathed Element:

- Pre-focused heat pattern directs infrared heat to the holding area
- Uniform heat distribution
- Energy efficient
- A wide variety of sizes and features available
- Our most popular solution



HIGH CLEARANCE Ultra-Glo® Durable Ceramic Element

- Stronger, more intense heat source
- For applications where there is a greater distance between the heat source and target surface
- Ideal for French fry station applications



GR5AL-36 or
GR5AHL-36



GR5A-36 or
GR5AH-36

Glo-Ray® Curved Infrared Strip Heaters: (pages 49-51)

1. Choose a length
2. Standard or high watt
3. Lights or no lights
4. Voltage: 220-230, 230-240
5. Choose control option for GR5A and GR5AH (GR5AL, GR5AHL have Remote Control Enclosure included)



GRA-72 or
GRAH-72



GRA-72D or
GRAH-72D



GRAL-72 or
GRAHL-72



GRAL-72D or
GRAHL-72D

Glo-Ray® Infrared Metal-Sheathed Strip Heaters: (pages 52-62)

1. Choose a length
2. Single or dual warmer
3. Standard or high watt
4. Lights or no lights
5. Voltage: 220, 240
6. Choose control option, remote installation recommended (required on some models)

GR-36 or
GRH-36



Glo-Ray® Infrared Stainless Steel Strip Heaters: (pages 53-54)

1. Choose a length
2. Standard or high watt
3. Voltage: 220, 240, 220-230, 230-240
4. Choose control option, remote installation is recommended. Multiple Strip Heaters may be connected to one RMB2 if the combined current draw of the warmers is less than the rating for the RMB2. Control wires exit from the attached control box. If no control box is supplied, they exit from side of the unit.

GRN-24
GRNH-24



Glo-Ray® Narrow Infrared Strip Heaters: (page 58-59)

1. Choose a length
2. Standard or high watt
3. Voltage: 220 or 240
4. Choose control option, remote installation is recommended. Multiple Strip Heaters may be connected to one RMB2 if the combined current draw of the warmers is less than the rating for the RMB2. Control wires exit from the attached control box. If no control box is supplied, they exit from side of the unit.

Ordering Instructions *continued*


GRAIH-60

GRAIHL-60


GRAIHL-60D

GRAIH-60D

Glo-Ray® Infra-Black® Strip Heaters: (pages 60-62)

1. Choose a length
2. Single or dual warmer
3. Lights or no lights
4. Voltage: 220, 240
5. Choose control option, remote installation is recommended. Multiple Strip Heaters may be connected to one RMB2 if the combined current draw of

the warmers is less than the rating for the RMB2. Control wires exit from the attached control box. If no control box is supplied, they exit from side of the unit.


**GR2A-36
or GR2AH-36**

**GR2A-36D
or GR2AH-36D**

**GR2AL-36
or GR2AHL-36**

**GR2AL-36D
or GR2AHL-36D**

Glo-Ray® Designer Infrared Strip Heaters: (pages 63-68)

1. Choose a length
2. Single or dual warmer
3. Standard or high watt
4. Lights or no lights
5. Voltage: 220, 240
6. Choose control option, remote installation only Multiple Strip Heaters may be connected to one RMB2 if the combined current draw of the warmers is less than the rating for the RMB2.

Control wires exit from the attached control box. If no control box is supplied, they exit from side of the unit.

7. Choose inset panel and corner cap color
8. Select Non-adjustable Stand Length (optional Overhead Mount sho wn)


**UGA-36 or
UGAH-36**

**UGA-36D or
UGAH-36D**

**UGAL-36 or
UGAHL-36**

**UGAL-36D or
UGAHL-36D**


Ultra-Glo® Ceramic Strip Heaters: (pages 69-71)

1. Choose a length
2. Single or dual warmer
3. Standard or high watt
4. Lights or no lights
5. Voltage: 220, 240
6. Choose control option, remote installation is recommended Multiple Strip Heaters may be connected to one RMB2 if the combined current

draw of the warmers is less than the rating for the RMB2. Control wires exit from the attached control box. If no control box is supplied, they exit from side of the unit.

Power and Switch Location

Each Strip Heater has specific Power and Switch locations (sample below). For information on other models, visit the *Document Library* under *Resources* on hatcocorp.com, and search *Power Locations*.

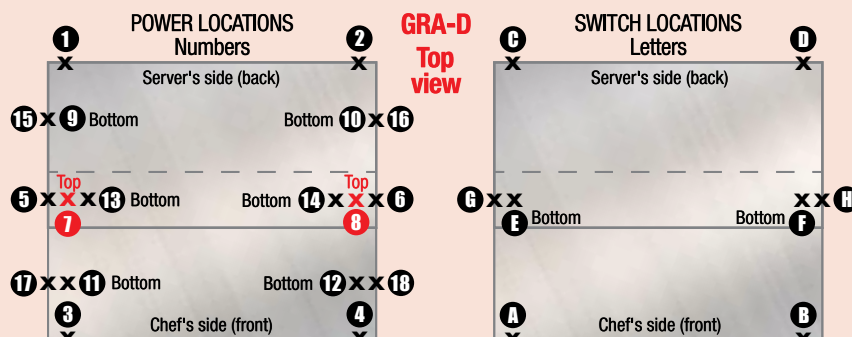

POWER: Numbers indicate potential power locations. Locations 9, 10, 11 and 12 are on the bottom of the warmer and are intended to be used in conjunction with the optional legs supplied by Hatco. Note: Maximum of 3 circuits down the leg. **SWITCH:** Letters indicate the potential control locations.

NOTE: Remote controls are available and recommended.

Typical Conduit Connection

Glo-Ray® Strip Heaters and **Narrow Strip Heaters** have Standard 152 mm leads, no conduit. **GR2A** models - conduit exits non-adjustable stand or overhead mount only. **GR5AL** models have a 1524 mm leadwire, which is 610 mm past the 914 mm conduit.

Ultra Glo® models - conduit exits through attached control box; if no control box, conduit exits side of unit.



Glo-Ray® Curved Infrared Strip Heaters


This stylish, patented design, based on our signature Glo-Ray Strip Heaters, is the perfect solution for your front-of-the-house applications. Superb for buffet and serving lines, the sleek curved design minimizes its size while accenting and warming the products below.

The entire holding surface is heated evenly with no "cold" spots thanks to Hatco's dependable infrared element technology.

- Narrow, curved design uses a very small footprint: 51 mm H x 153 mm D
- Lengths available from 457 - 1829 mm in 153 mm increments
- Patented housing design
- Angle brackets (mounting) are Standard
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food
- Available in standard or high watt
- End panels and mounting brackets match unit color
- Hatco's wide array of colors help provide the right look for your venue



GR5A-36/GR5AH-36 in optional Brilliant Blue Gloss Finish with optional 407 mm non-adjustable tubular stands (legs) in optional Brilliant Blue Gloss Finish

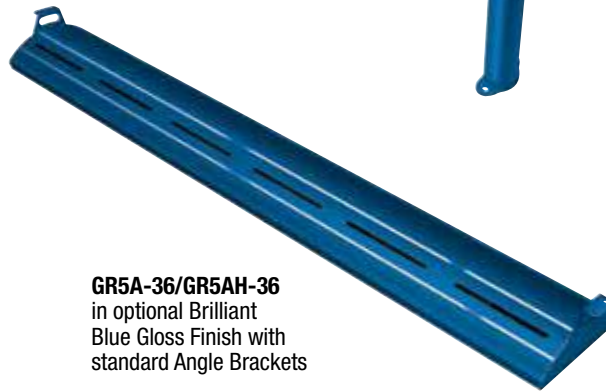

GR5A-36/GR5AH-36 in optional Brilliant Blue Gloss Finish with standard Angle Brackets

GLO-RAY CURVED INFRARED STRIP HEATERS

Model*	Width	Watts		Approx. Ship Weight	List Price🔄
		220-230V ^E	230-240V ^{EE}		
Standard Watt					
GR5A-18	457 mm	250-273	230-250	5 kg	\$ 723
GR5A-24	610 mm	350-383	321-350	5 kg	774
GR5A-30	762 mm	450-492	413-450	6 kg	825
GR5A-36	914 mm	575-628	528-575	6 kg	876
GR5A-42	1067 mm	675-738	620-675	6 kg	927
GR5A-48	1219 mm	800-874	735-800	7 kg	978
GR5A-54	1372 mm	925-1011	850-925	8 kg	1029
GR5A-60	1524 mm	1050-1148	964-1050	10 kg	1080
GR5A-66	1676 mm	1160-1268	1065-1160	12 kg	1131
GR5A-72	1829 mm	1275-1394	1171-1275	12 kg	1182

High Watt					
GR5AH-18	457 mm	350-383	321-350	5 kg	\$ 731
GR5AH-24	610 mm	500-546	459-500	5 kg	782
GR5AH-30	762 mm	650-710	597-650	6 kg	833
GR5AH-36	914 mm	800-874	735-800	6 kg	884
GR5AH-42	1067 mm	950-1038	872-950	6 kg	935
GR5AH-48	1219 mm	1100-1202	1010-1100	7 kg	986
GR5AH-54	1372 mm	1250-1366	1148-1250	8 kg	1037
GR5AH-60	1524 mm	1400-1530	1286-1400	10 kg	1088
GR5AH-66	1676 mm	1560-1705	1433-1560	12 kg	1139
GR5AH-72	1829 mm	1725-1885	1584-1725	12 kg	1190

* Available with CE Mark, no charge.

^E Uses 220V element. ^{EE} Uses 240V element.

[○] Does not include Remote Control Enclosure (RMB), see manual.


All Glo-Ray Curved Infrared Models Feature:

Leads: 915 mm conduit, 1524 mm Power Leads.

Angle Brackets: Provides 25 mm clearance between Strip Heater and overshelf.

Dimensions: 457-1829 mm W x 153 mm D x 51 mm H.

OPTIONS AND ACCESSORIES - PAGE 51



Glo-Ray® Curved Infrared Strip Heaters with LED Lights

Hatco's Glo-Ray Curved Infrared Strip Heaters with LED Lights feature a patented housing design that is low-profile, elliptical-shaped and stylish, the ideal solution for front-of-the-house applications where heat and/or lights are needed. It can operate with just the dual LED lights; or the dual LED lights can be used simultaneously with the infrared emitter to provide the perfect balance of light and heat.

- Narrow, curved design: 51 H x 153 mm D uses a very small footprint with lengths available from 457-1829 mm in 153 mm increments
- Patented housing design has energy efficient dual LED lights across the entire strip heater, which provide longer performance and energy savings (compared to Standard incandescent bulbs, 3.5 to 15.2 watts based on length)
- Can be used with lights or heat only
- Angle brackets (mounting) are Standard
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food
- 100% linear infinite controls with adjustability from 0-100%, allow for precise settings
- Field replaceable LED available as:
 - Warm White* (standard)
 - Neutral (Cool) White*
 - Dual Color: Warm White/Neutral (Cool) White* (toggle between color temperatures to enhance foods displayed)
- Electronic Infinite Remote Control Enclosure and power On/Off switch (controls lights, heat) included



GR5AL-36/GR5AHL-36
Top and bottom view. Shown in optional Radiant Red Gloss Finish and Standard Angle Brackets

GLO-RAY CURVED INFRARED STRIP HEATERS with LED LIGHTS

Model#	Width	Watts		Approx. Ship Weight	List Price
		220-230V ^E	230-240V ^{EE}		
Standard Watt					
GR5AL-18	457 mm	254-278	234-254	8 kg	\$2399
GR5AL-24	610 mm	356-388	327-356	9 kg	2536
GR5AL-30	762 mm	458-499	421-458	11 kg	2673
GR5AL-36	914 mm	584-638	537-584	11 kg	2810
GR5AL-42	1067 mm	686-749	631-686	11 kg	2947
GR5AL-48	1219 mm	812-887	747-812	11 kg	3084
GR5AL-54	1372 mm	939-1025	864-939	13 kg	3221
GR5AL-60	1524 mm	1066-1163	980-1066	13 kg	3358
GR5AL-66	1676 mm	1177-1285	1083-1177	17 kg	3495
GR5AL-72	1829 mm	1294-1412	1190-1294	17 kg	3632
High Watt					
GR5AHL-18	457 mm	354-387	326-354	8 kg	\$2407
GR5AHL-24	610 mm	506-552	465-506	8 kg	2544
GR5AHL-30	762 mm	668-729	614-668	10 kg	2681
GR5AHL-36	914 mm	809-884	744-809	10 kg	2818
GR5AHL-42	1067 mm	961-1049	883-961	10 kg	2955
GR5AHL-48	1219 mm	1112-1215	1023-1112	12 kg	3092
GR5AHL-54	1372 mm	1264-1380	1162-1264	12 kg	3229
GR5AHL-60	1524 mm	1416-1546	1301-1416	14 kg	3366
GR5AHL-66	1676 mm	1577-1722	1450-1577	14 kg	3503
GR5AHL-72	1829 mm	1744-1904	1603-1744	14 kg	3640

† Available with CE Mark, no charge.

^E Uses 220V element. ^{EE} Uses 240V element.

All Glo-Ray Curved Infrared with Infrared Lights Models Feature:

Switch Location: Remote Control Enclosure with Electronic Infinite Control and power On/Off switch (controls lights and heat) included.

Leads: 914 mm conduit, 1524 mm Power Leads, 1981 mm LED Leads.

Standard LED lead length is 457 mm longer than Power Lead length.

Angle Brackets: Provides 25 mm clearance between strip heater and overshelf.

Dimensions: 457-1829 mm W x 153 mm D x 51 mm H.

Control Box Dimensions: 180 W x 140 mm H.

Cut Out Dim.: 257 W x 159 D x 121 mm H.


OPTIONS AND ACCESSORIES - PAGE 51

* Warm White can range from 2700-3200K, Neutral (Cool) White from 4000-4300K

RECOMMENDED LIGHT USAGE

GR5A(H)L above...	Warm White*	Cool White*	Warm/Neutral (Cool) White*
Heated Well(s)	X		
Refrigerated Well(s)		X	
Heated Shelf (Shelves)	X		
Refrigerated Shelf (Shelves)		X	
Hot/Cold Well(s)			X
Hot/ Cold Shelf (Shelves)			X

* Warm White can range from 2700-3200K, Neutral (Cool) White from 4000-4300K





A GR5AL model in optional Radiant Red Gloss Finish above a GRS-54

OPTIONS (available at time of purchase only)

Designer Colors – End panels and Angle Brackets match unit color – Non-standard colors are non-returnable –								per 305 mm	\$32
RED	Warm Red	BLACK	Black	GRAY	Gray Granite	COPPER	Antique Copper		
WHITE	White Granite	BLUE	Navy Blue	GREEN	Hunter Green				
Gloss Finishes – End panels and Angle Brackets match unit color – Non-standard colors are non-returnable –								per 305 mm	\$44
GGOLD	Gleaming Gold	BBLUE	Brilliant Blue	GGRAY	Glossy Gray				
RRED	Radiant Red	BBLACK	Bold Black						
Non-Adjustable Tubular Stands – Clear Anodized Standard –									
Bottom Mount - attach to counter									
NTL5-10, -12		Specify 254 or 305 mm clearance						1 pair	\$166
NTL5-14, -16		Specify 356 or 407 mm clearance						1 pair	207
Side mount leg for bottom mount installation									
SNTL5-10B, -12B		Specify 254 or 305 mm clearance						1 pair	223
SNTL5-14B, -16B		Specify 356 or 406 mm clearance						1 pair	254
Side mount leg for top mount installation									
SNTL5-10T, -12T		Specify 254 or 305 mm clearance						1 pair	223
SNTL5-14T, -16T		Specify 356 or 406 mm clearance						1 pair	254
NTL5-PAINT		Designer Color or Gloss Finish for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –						1 pair	46
RED	Warm Red	BLACK	Black	GRAY	Gray Granite	COPPER	Antique Copper		
WHITE	White Granite	BLUE	Navy Blue	GREEN	Hunter Green				
RRED	Radiant Red	GGRAY	Glossy Gray	BBLACK	Bold Black				
GGOLD	Gleaming Gold	BBLUE	Brilliant Blue	COPPER	Antique Copper				
GR5AL-NW	GR5A(H)L models only –Neutral (Cool) White LED							No Charge	
GR5AL-WW/NW	GR5A(H)L models only – Dual Warm/Neutral (Cool) White LED							\$342	
GR5AL-OPP	GR5A(H)L models only – Power and LED wiring exit opposite ends of unit (Same end is the Standard offering) – Must specify Power Lead length and LED Lead length required –							No Charge	
Power Wire Leads – GR5A(H) models – 11524 mm Power Lead length Standard –									
GR5A-LEADS10		1829-3048 mm total Power Lead length						\$27	
GR5A-LEADS15		3353-4572 mm total Power Lead length						54	
Power Wire Leads – GR5A(H)L models – 1524 mm Power Lead length is Standard –									
GR5AL-LEADS10		1829-3048 mm total power Lead length						\$27	
GR5AL-LEADS15		3353-4572 mm total power Lead length						54	
LED Leads - GR5A(H)L models only – 1981 mm LED Lead length is Standard – Standard LED lead length is 457 mm longer than Power Lead length –									
LED-LEADS10		3505 mm total LED Lead length						\$ 42	
LED-LEADS15		5029 mm total LED Lead length						84	
LED-LEADS20		6553 mm total LED Lead length						126	
NO CONTROL	GR5A(H) only - no control included, requires selection of RMB2-xx control, see page 74							No Charge	
REM INF	GR5A(H) models only – Remote Infinite Switches in lieu of Toggle (max. 12.2 Amps) –							each 47	
REM TOG	GR5A(H) models only – Remote Toggle Switches (max. 15 Amps) –							No Charge	
RMB	GR5A(H) models only – Remote Control Enclosure (available in Designer Colors or Gloss Finishes) Non-standard colors are non-returnable – Clear Anodized Standard – Please see manual for more information –								

RECOMMENDED MOUNTING HEIGHTS – PAGE 72
COLORS AND FINISHES – INSIDE BACK COVER

Glo-Ray® Aluminum Infrared Strip Heaters

Safely hold the temperature of your product without drying out or further cooking food with Hatco's Glo-Ray Aluminum Infrared Strip Heaters. The end result is hot, fresh food that's ready-to-serve. The continuous aluminum housing and heavy-duty mountings ensure the durability and quality of Hatco products. Heavy-duty Stainless Steel housings are available (see next page).

- Ensures maximum flavor, safety and holding time
- Even heat distribution – no "cold spots"
- Sturdy extruded aluminum housings do not sag, from 457 to 3658 mm
- Available in Stainless Steel housing 457 to 2438 mm
- Reflector does not blacken, maintaining a consistent heat pattern
- Heavy-duty insulation minimizes heat loss

- Protective reinforced wire guard supports heating element without affecting heat distribution
- Optional Sneeze Guards (excludes Stainless Steel models)
- Available with shatter-resistant incandescent lights (not available for Stainless Steel models)
- Additional reflector styles and lower wattage elements available, consult factory for more information



GRAH-48 with optional Sneeze Guards, cord and plug set and T-leg Stands



GRAH-36 with optional Designer Navy Blue, infinite switch, cord and plug set and C-leg Stands

Toggle Switch: Max. 15 Amps
Infinite Switch: Max. 12.2 Amps

GLO-RAY ALUMINUM INFRARED STRIP HEATERS

Model	Width	Watts	Ship Weight	List Price ^{○‡}
Standard Watt				
GRA-18	457 mm	250	3 kg	\$ 330
GRA-24	610 mm	350	3 kg	347
GRA-30	762 mm	450	4 kg	371
GRA-36	914 mm	575	4 kg	394
GRA-42	1067 mm	675	5 kg	418
GRA-48	1219 mm	800	5 kg	444
GRA-54	1372 mm	925	6 kg	472
GRA-60	1524 mm	1050	6 kg	503
GRA-66	1676 mm	1160	7 kg	553
GRA-72	1829 mm	1275	8 kg	624
GRA-84	2134 mm	1500	9 kg	721
GRA-96	2438 mm	1725	10 kg	820
GRA-108	2743 mm	1850	10 kg	1033
GRA-120	3048 mm	2100	12 kg	1122
GRA-132	3353 mm	2320	14 kg	1212
GRA-144	3658 mm	2550	15 kg	1301
High Watt				
GRAH-18	457 mm	350	3 kg	\$ 338
GRAH-24	610 mm	500	4 kg	355
GRAH-30	762 mm	660	4 kg	379
GRAH-36	914 mm	800	4 kg	402
GRAH-42	1067 mm	950	5 kg	426
GRAH-48	1219 mm	1100	5 kg	452
GRAH-54	1372 mm	1250	6 kg	480
GRAH-60	1524 mm	1400	6 kg	511
GRAH-66	1676 mm	1560	7 kg	561
GRAH-72	1829 mm	1725	8 kg	632
GRAH-84	2134 mm	2050	9 kg	729
GRAH-96	2438 mm	2400	10 kg	828
GRAH-108	2743 mm	2500	10 kg	1041
GRAH-120	3048 mm	2800	12 kg	1130
GRAH-132	3353 mm	3120	14 kg	1220
GRAH-144	3658 mm	3450	15 kg	1309

[○] Does not include Remote Control Enclosure (RMB), see page 74.

[‡] Available with CE Mark, add \$10, models GRA(H) -18 through -96 only.

All Glo-Ray Aluminum Infrared Models Feature:

Voltage: 220 or 240 volt, single phase.

Toggle Switch (max. 15 Amps) Location: Chef's left side (unless otherwise specified).

Leads: 152 mm leads – server's right.

Dimensions: 457-3658 W x 152 D x 64 H mm.

OPTIONS AND ACCESSORIES – PAGE 54

RECOMMENDED MOUNTING HEIGHTS – PAGE 72




Glo-Ray® Aluminum Infrared Strip Heaters

continued



GRAHL-36 with optional Sneeze Guards and adjustable tubular stands

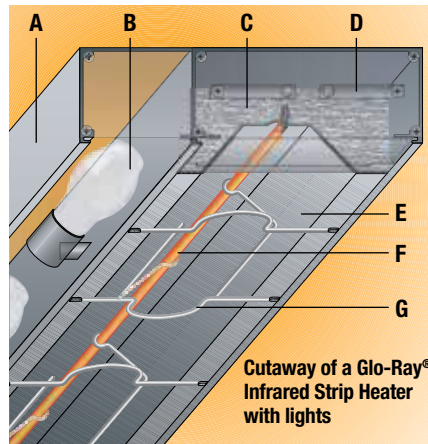

Cutaway of a Glo-Ray® Infrared Strip Heater with lights

A Stainless Steel or sturdy Aluminum housings that do not sag, from 457 up to 3658 mm in 153 mm increments. Stainless Steel units available as single units without lights, up to 2438 mm in width

B Shatter-resistant incandescent lights (standard on GRAL/GRAHL)

C Heavy-duty insulation minimizes heat loss

D Standard hanger tabs are provided

E Aluminized reflector retains full heat intensity and directs more heat towards the edges of the holding surface.

F Long life metal-sheathed heating element

G Protective wire guard supports heating element without affecting heat distribution

GLO-RAY ALUMINUM INFRARED STRIP HEATERS with LIGHTS

Model	No. of Bulbs	Width	Watts	Ship Weight	List Price ^{○*}
Standard Watt					
GRAL-18	2	457 mm	370	4 kg	\$ 522
GRAL-24	2	610 mm	470	5 kg	543
GRAL-30	2	762 mm	570	5 kg	603
GRAL-36	3	914 mm	755	6 kg	664
GRAL-42	3	1067 mm	855	7 kg	728
GRAL-48	4	1219 mm	1040	8 kg	791
GRAL-54	4	1372 mm	1165	9 kg	863
GRAL-60	5	1524 mm	1350	10 kg	938
GRAL-66	5	1676 mm	1460	10 kg	1026
GRAL-72	6	1829 mm	1635	11 kg	1143
GRAL-84	7	2134 mm	1920	13 kg	1320
GRAL-96	8	2438 mm	2205	15 kg	1497
GRAL-108	9	2743 mm	2390	16 kg	1801
GRAL-120	10	3048 mm	2700	18 kg	1975
GRAL-132	11	3353 mm	2980	20 kg	2150
GRAL-144	12	3658 mm	3270	22 kg	2328
High Watt					
GRAHL-18	2	457 mm	470	4 kg	\$ 530
GRAHL-24	2	610 mm	620	5 kg	551
GRAHL-30	2	762 mm	780	5 kg	611
GRAHL-36	3	914 mm	980	6 kg	672
GRAHL-42	3	1067 mm	1130	7 kg	736
GRAHL-48	4	1219 mm	1340	8 kg	799
GRAHL-54	4	1372 mm	1490	9 kg	871
GRAHL-60	5	1524 mm	1700	10 kg	946
GRAHL-66	5	1676 mm	1860	10 kg	1034
GRAHL-72	6	1829 mm	2085	15 kg	1151
GRAHL-84	7	2134 mm	2470	13 kg	1328
GRAHL-96	8	2438 mm	2880	24 kg	1505
GRAHL-108	9	2743 mm	3040	16 kg	1809
GRAHL-120	10	3048 mm	3400	18 kg	1983
GRAHL-132	11	3353 mm	3780	20 kg	2158
GRAHL-144	12	3658 mm	4170	22 kg	2336

[○] Does not include Remote Control Enclosure (RMB), see page 74.

* Available with CE Mark, add \$10, models GRA(H)L -18 through -96 only.

All Glo-Ray Aluminum Infrared with Lights Models Feature:

Voltage: 220 or 240, single phase.

Toggle Switch (max. 15 Amps) Location: Chef's left side – light side (unless otherwise specified).

Leads: 152 mm leads – server's right.

Dimensions: 457-3658 W x 229 D x 64 H mm

OPTIONS AND ACCESSORIES – PAGE 54

RECOMMENDED MOUNTING HEIGHTS – PAGE 72

GLO-RAY STAINLESS STEEL INFRARED STRIP HEATERS

Model	Width	Watts	Ship Weight	List Price ^{○*}
Standard Watt				
GR-18	457 mm	250	3 kg	\$ 486
GR-24	610 mm	350	3 kg	511
GR-36	914 mm	575	5 kg	577
GR-48	1219 mm	800	5 kg	627
GR-60	1524 mm	1050	7 kg	709
GR-72	1829 mm	1275	9 kg	843
GR-96	2438 mm	1725	12 kg	1020
High Watt				
GRH-18	457 mm	350	4 kg	\$ 494
GRH-24	610 mm	500	3 kg	519
GRH-36	914 mm	800	5 kg	585
GRH-48	1219 mm	1100	6 kg	635
GRH-60	1524 mm	1400	7 kg	717
GRH-72	1829 mm	1725	9 kg	851
GRH-96	2438 mm	2400	12 kg	1028

[○] Does not include Remote Control Enclosure (RMB), see page 74.

* Available with CE Mark, add \$10 (models GR, GRH -18 through -72 only).

All Glo-Ray Stainless Steel Infrared Models Feature:

Voltage: 220 or 240 volt, single phase.


Toggle Switch (max. 15 Amps) Location: Chef's left side.

Leads: 152 mm leads – server's right.

Dimensions: 610-2438 W x 152 D x 70 H mm.

NOTE: Stainless Steel models are not available with lights, Sneeze Guard or as dual or tandem units.

Contact factory for stainless marine applications.

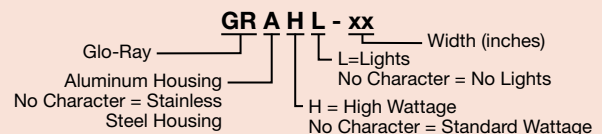


GRAHL-48 with optional Sneeze Guard

OPTIONS (available at time of purchase only)

Designer Colors, aluminum models 457-3658 mm – Non-standard colors are non-returnable – Clear Anodized Standard –

COLOR-6	152 mm Housing for GRA and GRAH models (color selection below)	per 305 mm	\$32
COLOR-9	229 mm Housing for GRAL and GRAHL models (color selection below)	per 305 mm	32
RED	Warm Red	GRAY	Gray Granite
BLACK	Black	WHITE	White Granite
		NAVY	Navy Blue
		GREEN	Hunter Green
		COPPER	Antique Copper

Gloss Finishes, aluminum models 457-3658 mm – Non-standard colors are non-returnable – Clear Anodized Standard –

GLOSS-6	152 mm Housing for GRA and GRAH models (Gloss Finish selection below)	No Charge	
GLOSS-9	229 mm Housing for GRAL and GRAHL models (Gloss Finish selection below)	per 305 mm	\$44
RRED	Radiant Red	GGRAY	Glossy Gray
GGOLD	Gleaming Gold	BBLUE	Brilliant Blue
		BBLACK	Bold Black

IND. LGT	Indicator Light (Remote Control only on all Tandem Element units)	20
-----------------	---	----

Power Leads – Extend beyond Standard 152 mm pigtail leads (must specify lead length) –

LEADS5	305-1525 mm extended Electrical Leads	\$ 27
LEADS10	1829-3048 mm extended Electrical Leads	54
LEADS15	3352-4572 mm extended Electrical Leads	81
LEADS20	4877-6096 mm extended Electrical Leads	108

Sneeze Guards

9.375BP1	238 mm Sneeze Guard - one side	per 305 mm	71
9.375BP2	238 mm Sneeze Guard - two sides	per 305 mm	142
14BP1	356 mm Sneeze Guard - one side	per 305 mm	113
14BP2	356 mm Sneeze Guard - two sides	per 305 mm	226
NO BULB	No bulb option (GRAL, GRAHL models only)	No Charge	
LIGHTS-ADD'L	Extra Lamps – Installed – max. two per 305 mm less one – one per 305 mm is Standard	each	32
3 ANEAL REFL	Bright Annealed Reflector for lights	per 305 mm	27
NO CONTROL	No control included – (GRA, GRAH, GRAL, GR, GRH models only) Requires selection of RMB2-xx control (see page 74)	No Charge	

Infinite Control (REMOTE CONTROL ENCLOSURE RECOMMENDED) Consult factory if rating of element exceeds 12.2 Amps –

BLT INF	Built-in (max. of 12.2 Amps) Remote installation recommended	\$ 47
REM INF	Remote Infinite Switches in lieu of Toggle (max. 12.2 Amps)	47
RMB	Remote Control Enclosure available in Designer Colors and Gloss Finishes – Non-standard colors are non-returnable – Clear Anodized Standard –	see page 74 for models and prices

Stands

ATL	Adjustable Tubular Stands 254-356 mm – not available in Designer Colors – Not available with cord	1 pair	245
NTL-10, -12	Non-Adjustable Tubular Stands specify 254 or 305 mm clearance – Not available in Designer Colors – Not available with cord	1 pair	113
NTL-14, -16	Non-Adjustable Tubular Stands – specify 356 or 406 mm clearance – Not available with cord	1 pair	121
NTL-PAINT	Designer Color or Gloss Finish to match unit color for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –	1 pair	45
CL-LOW	C-Leg Stand (standard Watt) – 254 mm clearance – for models up to 1829 mm	1 pair	129
CL-HIGH	C-Leg Stand (High Watt) – 343 mm clearance – for models up to 1829 mm	1 pair	145
TL-10	T-Leg Stand (standard Watt) 254 mm clearance – for models up to 1829 mm	1 pair	312
TL-13	T-Leg Stand 343 mm clearance – for models up to 1829 mm	1 pair	344
TL-16	T-Leg Stand 406 mm clearance – for models up to 1829 mm	1 pair	366
TL-18	T-Leg Stand 457 mm clearance – for models up to 1829 mm	1 pair	393
CAP-EX	Attached 1829 mm Cord and Plug Set on models up to 2438 mm		37

ACCESSORIES (available for purchase at any time)

ADJ ANGLE	Adjustable Angle Brackets (GRA, GRAH models only)	1 pair	\$29
ADJ ANGLE7	178 mm tall Adjustable Angle Bracket	1 pair	34
CHAIN 1	Chain Suspension	per 305 mm	14
GR-ANGLE	Adjustable Angle Brackets (GR and GRH models only)	1 pair	29

COLORS AND FINISHES – INSIDE BACK COVER

Glo-Ray® Aluminum Dual Infrared Strip Heaters

Create a deeper holding area with Glo-Ray Aluminum Dual Infrared Strip Heaters mounted side-by-side, keeping hot food at optimum serving temperatures. The pre-focused heat pattern directs heat from a metal sheathed element across the entire holding surface. The continuous aluminum housing and heavy-duty mountings ensure the durability and quality of Hatco products.

- Ensures maximum flavor, safety and holding time
- Provides even heat distribution – no "cold spots"
- Sturdy extruded aluminum housings that do not sag, from 457 to 3658 mm
- Long life metal sheathed heating elements
- Reflector does not blacken, maintaining a consistent heat pattern

- Reinforced, protective wire guard supports heating element without affecting heat distribution
- 76 or 152 mm spacer available
- Heavy-duty insulation minimizes heat loss
- Additional reflector styles and lower wattage elements available, consult factory for more information

GLO-RAY ALUMINUM DUAL INFRARED STRIP HEATERS

Model	Width	Watts	Ship Weight	List Price ○ ±	
				76 mm Spacer	152 mm Spacer
Standard Watt					
GRA-18D	457 mm	500	6 kg	\$ 816	\$ 830
GRA-24D	610 mm	700	7 kg	851	865
GRA-30D	762 mm	900	8 kg	941	960
GRA-36D	914 mm	1150	10 kg	1030	1049
GRA-42D	1067 mm	1350	10 kg	1120	1139
GRA-48D	1219 mm	1600	12 kg	1209	1235
GRA-54D	1372 mm	1850	14 kg	1298	1324
GRA-60D	1524 mm	2100	16 kg	1398	1438
GRA-66D	1676 mm	2320	16 kg	1536	1576
GRA-72D	1829 mm	2550	16 kg	1719	1759
GRA-84D	2134 mm	3000	23 kg	1988	2042
GRA-96D	2438 mm	3450	24 kg	2265	2319
GRA-108D	2743 mm	3700	27 kg	2723	2777
GRA-120D	3048 mm	4200	30 kg	2972	3054
GRA-132D [†]	3353 mm	4640	34 kg	3224	3306
GRA-144D	3658 mm	5100	37 kg	3482	3564
High Watt					
GRAH-18D	457 mm	700	6 kg	\$ 832	\$ 846
GRAH-24D	610 mm	1000	7 kg	867	881
GRAH-30D	762 mm	1320	8 kg	957	976
GRAH-36D	914 mm	1600	9 kg	1046	1065
GRAH-42D	1067 mm	1900	11 kg	1136	1155
GRAH-48D	1219 mm	2200	12 kg	1225	1251
GRAH-54D	1372 mm	2500	14 kg	1314	1340
GRAH-60D	1524 mm	2800	15 kg	1414	1454
GRAH-66D	1676 mm	3120	17 kg	1552	1592
GRAH-72D [†]	1829 mm	3450	16 kg	1735	1775
GRAH-84D [†]	2134 mm	4100	23 kg	2004	2058
GRAH-96D [†]	2438 mm	4800	24 kg	2281	2335
GRAH-108D	2743 mm	5000	27 kg	2739	2793
GRAH-120D [†]	3048 mm	5600	30 kg	2988	3070
GRAH-132D	3353 mm	6240	34 kg	3240	3322
GRAH-144D	3658 mm	6900	37 kg	3498	3580

○ Does not include Remote Control Enclosure (RMB), see page 74.

† Available with RMB or remote switch only, consult factory for additional charges.

* Available with CE Mark, add \$20, (specifics below)

GRA(H)-18D through -96D available with CE mark.

GRA-96D in 220-230V requires Remote Control Enclosure (RMB)

GRAH-72D through -96D in 220-230V and 230-240V require Remote Control Enclosure (RMB), see page 74).

All Glo-Ray Aluminum Dual Infrared Models Feature:

Voltage: 220 or 240, single phase.

Toggle Switch (max. 15 Amps) Location: Chef's left side (unless otherwise specified).

Leads: 152 mm leads – server's right.

Dimensions: with 76 mm Spacer (standard): 457-3658 W x 381 D x 64 H mm.
with 152 mm Spacer: 457-3658 W x 457 D x 64 H mm.

OPTIONS AND ACCESSORIES – PAGE 57


RECOMMENDED MOUNTING HEIGHTS – PAGE 72




GRAH-72D with optional *Designer Warm Red*, 152 mm spacer and tandem elements



GRAH-36D with standard 76 mm spacer

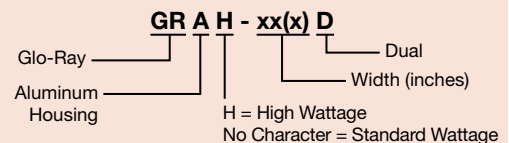

- A Shown with optional shatter-resistant incandescent lights
- B Sturdy extruded aluminum housings that do not sag, from 457 up to 3658 mm
- C Reflector does not blacken, maintaining a consistent heat pattern
- D Standard hanger tab is provided for under shelf or chain installation
- E Heavy-duty insulation minimizes heat loss
- F Long life metal-sheathed heating element
- G Protective wire guard supports heating element without affecting heat distribution

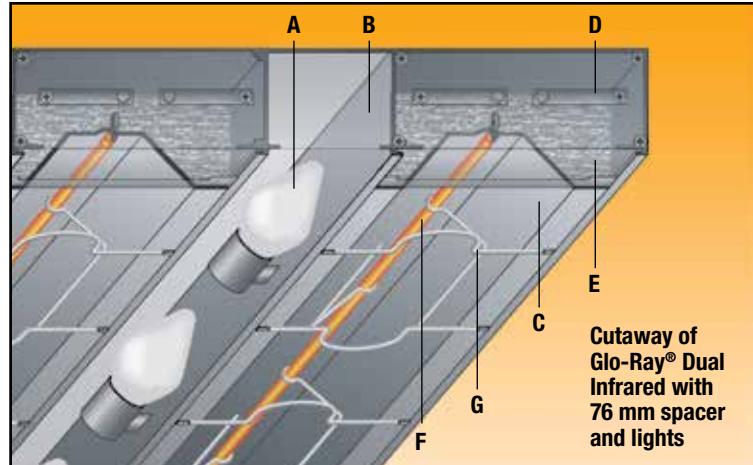

Toggle Switch: Max. 15 Amps
Infinite Switch: Max. 12.2 Amps

GLO-RAY ALUMINUM DUAL INFRARED STRIP HEATERS with LIGHTS

Model	No. of Bulbs	Width	Watts		Ship Weight	List Price ^{○*}	
			220V	240V		76 mm Spacer	152 mm Spacer
Standard Watt							
GRAL-18D	2	457 mm	601	620	6 kg	\$ 905	\$ 919
GRAL-24D	2	610 mm	801	820	7 kg	935	949
GRAL-30D	2	762 mm	915	1020	9 kg	1043	1062
GRAL-36D	3	914 mm	1301	1330	10 kg	1153	1172
GRAL-42D	3	1067 mm	1501	1530	11 kg	1266	1285
GRAL-48D	4	1219 mm	1802	1840	13 kg	1380	1406
GRAL-54D	4	1372 mm	2052	2090	15 kg	1501	1527
GRAL-60D	5	1524 mm	2352	2400	16 kg	1632	1672
GRAL-66D	5	1676 mm	2572	2620	18 kg	1787	1827
GRAL-72D	6	1829 mm	2853	2910	19 kg	1998	2038
GRAL-84D	7	2134 mm	3353	3420	23 kg	2311	2365
GRAL-96D	8	2438 mm	3853	3930	24 kg	2626	2680
GRAL-108D	9	2743 mm	4154	4240	29 kg	3119	3173
GRAL-120D	10	3048 mm	4704	4800	33 kg	3413	3495
GRAL-132D	11	3353 mm	5195	5300	36 kg	3712	3794
GRAL-144D	12	3658 mm	5705	5820	39 kg	4014	4096
High Watt							
GRAHL-18D	2	457 mm	801	820	6 kg	\$ 921	\$ 935
GRAHL-24D	2	610 mm	1101	1120	7 kg	951	965
GRAHL-30D	2	762 mm	1421	1440	9 kg	1059	1078
GRAHL-36D	3	914 mm	1751	1780	10 kg	1169	1188
GRAHL-42D	3	1067 mm	2051	2080	11 kg	1282	1301
GRAHL-48D	4	1219 mm	2402	2440	14 kg	1396	1422
GRAHL-54D	4	1372 mm	2702	2740	15 kg	1517	1543
GRAHL-60D	5	1524 mm	3052	3100	17 kg	1648	1688
GRAHL-66D	5	1676 mm	3372	3420	17 kg	1803	1843
GRAHL-72D	6	1829 mm	3753	3810	19 kg	2014	2054
GRAHL-84D	7	2134 mm	4453	4520	23 kg	2327	2381
GRAHL-96D	8	2438 mm	5203	5280	24 kg	2642	2696
GRAHL-108D [‡]	9	2743 mm	5454	5540	29 kg	3135	3189
GRAHL-120D [‡]	10	3048 mm	6104	6200	33 kg	3429	3511
GRAHL-132D [‡]	11	3353 mm	6795	6900	36 kg	3728	3810
GRAHL-144D [‡]	12	3658 mm	7505	7620	39 kg	4030	4112

[○] Does not include Remote Control Enclosure (RMB), see page 74.

^{*} Available with CE Mark, add \$20 (see specifics below).

GRAL-18D through -96D are available with CE mark.

GRAHL-18D through -96D are available with CE mark (GRAHL-72D, -84D, -96D require Remote Control Enclosure (RMB), see page 74).

[‡] Available with RMB or remote switch only, consult factory for additional charges.

All Glo-Ray Aluminum Dual Infrared with Lights Models Feature:

Voltage: 220 or 240, single phase.

Toggle Switch (max. 15 Amps) Location: Chef's left side (unless otherwise specified).


Leads: 152 mm leads – server's right.

Dimensions: with 76 mm Spacer (standard): 381 D x 64 H mm.

with 152 mm Spacer: 457 D x 64 H mm.

OPTIONS AND ACCESSORIES – PAGE 57

RECOMMENDED MOUNTING HEIGHTS – PAGE 72





A series of GRAH-60D

Strip Heaters

OPTIONS (available at time of purchase only)**Designer Colors, aluminum models 457-3658 mm – Non-standard colors are non-returnable – Clear Anodized Standard –**

COLOR-15, -18	381 mm and 457 mm housings for GRA, GRAH, GRAL and GRAHL Dual models	per 305 mm	\$46
RED	Warm Red	GRAY	Gray Granite
BLACK	Black	WHITE	White Granite
		NAVY	Navy Blue
		COPPER	Antique Copper
		GREEN	Hunter Green

Gloss Finishes, aluminum models 457-3658 mm – Non-standard colors are non-returnable – Clear Anodized Standard –

GLOSS-15, -18	381 mm and 457 mm housings for GRA, GRAH, GRAL and GRAHL Dual models	per 305 mm	\$59
RRED	Radiant Red	GGRAY	Glossy Gray
GGOLD	Gleaming Gold	BBLACK	Bold Black
		BBLUE	Brilliant Blue

IND. LGT	Indicator Light (remote only)		20
-----------------	-------------------------------	--	----

Power Leads – Must specify lead length –

LEADS5	305-1525 mm extended Electrical Leads		\$ 27
LEADS10	1829-3048 mm extended Electrical Leads		54
LEADS15	3352-4572 mm extended Electrical Leads		81
LEADS20	4877-6096 mm extended Electrical Leads		108

Sneeze Guards

9.375BP1	238 mm Sneeze Guard - one side	per 305 mm	\$ 71
9.375BP2	238 mm Sneeze Guard - two sides	per 305 mm	142
14BP1	356 mm Sneeze Guard - one side	per 305 mm	113
14BP2	356 mm Sneeze Guard, - two sides	per 305 mm	226

NO BULB No bulb option (GRAL-xxD, GRAHL-xxD models only) No Charge**LIGHTS-ADD'L** Extra Lamps – Installed (max. two per 305 mm less one) – one per 305 mm is Standard each 32**3 ANEAL REFL** Bright Annealed Reflector for lights with 76 mm Spacer per 305 mm 27**6 ANEAL REFL** Bright Annealed Reflector for lights with 152 mm Spacer per 305 mm 40**NO CONTROL** No control included – Requires selection of RMB2-xx control (see page 74) No Charge**REM INF** Remote Infinite Control – max. of 12.2 Amps – (CE requires Remote Control Enclosure) 47**RMB** Remote Control Enclosure available in Designer Colors and Gloss Finishes – Non-standard colors are non-returnable – Clear Anodized Standard – see page 74 for models and prices**RMB-ATT** Factory attaches control box to Strip Heater (GRA, GRAH, GRAL and GRAHL Dual models only) – for CE only Must select RMB on page 74 and add cost 44**Stands**

ATL-D	Adjustable Tubular Stands 254-356 mm (not available in Designer Colors)	2 pair	\$489
NTL-10-D, 12-D	Non-Adjustable Tubular Stands (specify 254 or 305 mm clearance)	2 pair	227
NTL-14-D, 16-D	Non-Adjustable Tubular Stands (specify 356 or 406 mm clearance)	2 pair	242
NTL-PAINT-D	Designer Color or Gloss Finish to match unit color for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable	2 pair	90

ACCESSORIES (available for purchase at any time)

ADJ ANGLE-D	Adjustable Angle Brackets for Dual models (see page 73 for illustration)	2 pair	\$58
ADJ ANGLE7-D	178 mm tall Adjustable Angle Brackets for Dual models (see page 73 for illustration)	2 pair	68
CHAIN 1	Chain Suspension (see page 73 for illustration)	per 305 mm	14
Chef LED 230V adjustable bulb – GRAL-xxD, GRAHL-xxD models only, all voltages – see page 45 for more information –			\$129

All models must be installed as a pass through, GRAL-xxD must be 15" or higher from surface, GRAHL-xxD must be 18" or higher from surface – bulbs must be rotated down –

CLED-2700-230 Similar to warm incandescent **CLED-3000-230** Similar to warm halogen light**CLED-4000-230** Similar to cool fluorescent light

Chef LED Bulb

COLORS AND FINISHES – INSIDE BACK COVER



Glo-Ray® Narrow Infrared Strip Heaters

Hatco Glo-Ray Narrow Infrared Strip Heaters keep all hot foods at optimum serving temperatures longer, while the slim design fits ideally in buffet areas. Even the most delicate dishes hold that "just-prepared" look. The entire holding surface is heated evenly with no "cold" spots.

- Has a slim design that's only 51 mm in height and 102 mm deep
- Available in widths from 457-1829 mm

- Pre-focused heat pattern maintains serving temperatures longer without continuing to cook the food
- Optional Remote Control Enclosure (RMB) in *Designer Colors*

GRN-24 in standard *Designer Black* with standard angle brackets



Toggle Switch: Max. 15 Amps
Infinite Switch: Max. 12.2 Amps

GLO-RAY NARROW INFRARED STRIP HEATERS

Model	Width	Watts	Ship Weight	List Price ^{○*}
Standard Watt				
GRN-18	457 mm	250	2 kg	\$421
GRN-24	610 mm	350	3 kg	446
GRN-30	762 mm	450	4 kg	473
GRN-36	914 mm	575	4 kg	502
GRN-42	1067 mm	675	4 kg	532
GRN-48	1219 mm	800	5 kg	564
GRN-54	1372 mm	925	5 kg	596
GRN-60	1524 mm	1050	6 kg	638
GRN-66	1676 mm	1160	7 kg	697
GRN-72	1829 mm	1275	8 kg	787
High Watt				
GRNH-18	457 mm	350	3 kg	\$429
GRNH-24	610 mm	500	3 kg	454
GRNH-30	762 mm	660	3 kg	481
GRNH-36	914 mm	800	4 kg	510
GRNH-42	1067 mm	950	4 kg	540
GRNH-48	1219 mm	1100	5 kg	572
GRNH-54	1372 mm	1250	5 kg	604
GRNH-60	1524 mm	1400	6 kg	646
GRNH-66	1676 mm	1560	7 kg	705
GRNH-72	1829 mm	1725	8 kg	795

[○] Does not include Remote Control Enclosure (RMB), see page 74.

* Available with CE Mark, add \$20.

All Glo-Ray Narrow Infrared Models Feature:

Voltage: 220 or 240, single phase.

Toggle Switch with Pilot (max. 15 Amps) Location: Chef's left side (unless otherwise specified).


Designer Color Angle Brackets: To match unit color and provide 38 mm clearance between Strip Heater and overself. Non-standard colors are non-returnable.


Leads: 152 mm leads – server's right.

Dimensions: 457-1829 W x 102 D x 51 H mm.

OPTIONS – PAGE 59

RECOMMENDED MOUNTING HEIGHTS – PAGE 72



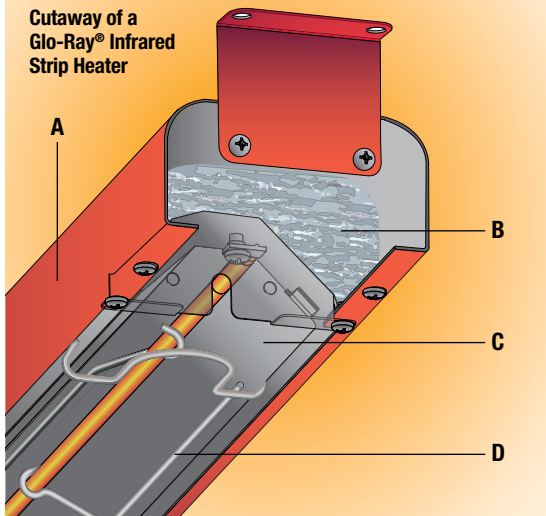Cutaway of a
Glo-Ray® Infrared
Strip Heater

- A** Sturdy housing available in optional Stainless Steel, or six optional *Designer Colors* (*Designer Black* Standard)
- B** Heavy-duty insulation minimizes heat loss
- C** Aluminized reflector retains full heat intensity and directs more heat towards edges of holding surface
- D** Protective reinforced wire guard supports heating element without affecting heat distribution

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Black Standard –								No Charge
RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper	
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green			
Stainless Steel – Additional Charge – Non-standard colors are non-returnable –								per 305 mm \$32
SS	Stainless Steel							
Power Leads – Must specify lead length –								
LEADS5	305-1525 mm extended Electrical Leads							\$ 27
LEADS10	1829-3048 mm extended Electrical Leads							54
LEADS15	3352-4572 mm extended Electrical Leads							81
LEADS20	4877-6096 mm extended Electrical Leads							108
NO CONTROL	No control included – Requires selection of RMB2-xx control (see page 74)							No Charge
RMB	Remote Control Enclosure available in <i>Designer Colors</i> or Gloss Finishes – Non-standard colors are non-returnable – Clear Anodized Standard –							see page 60
TABS	Stainless steel Hanger tabs in lieu of Angle Brackets							No Charge
CHAIN-HOOK	Two S Hooks with two 153 mm lengths of chain							each 14
Stands								
NTL-10, -12	Non-Adjustable Tubular Stands – specify 254 or 305 mm clearance and power location							1 pair 113
NTL-14, -16	Non-Adjustable Tubular Stands – specify 356 or 406 mm clearance and power location							1 pair 121
NTL-PAINT	<i>Designer Color</i> to match unit color for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –							1 pair 45

COLORS AND FINISHES – INSIDE BACK COVER

Glo-Ray® Aluminum Infra-Black® High Watt Strip Heaters

For foodwarming at a close range to food product, the Glo-Ray Aluminum Infra-Black High Watt heat technology is ideal, emitting a solid panel of uniform heat. Sturdy continuous single or dual extruded aluminum housings assure quality, durability and a variety of widths, depths, mounting arrangements and colors, will fit your operation.

- Provides ideal amount of heat for limited space operations, mounted 102 to 254 mm above target surface for singles and 203 to 356 mm for duals
- Infra-Black emitter provides even heat distribution – eliminating hot spots
- Sturdy aluminum housings that do not sag, from 457 to 1829 mm in 152 mm increments

- Heavy-duty insulation keeps the exterior housing cool
- Protective wire guard supports heating element without affecting heat distribution
- Standard 76 mm spacer or optional 152 mm spacer available on dual models with or without lights (see next page)



GRAIH-36 with optional wire guard (requires TCBI or Remote Control Enclosure - RMB)



GRAIH-36 with optional TCBI control box and wire guard

Toggle Switch: Max. 15 Amps
Infinite Switch: Max. 12.2 Amps

GLO-RAY ALUMINUM INFRA-BLACK HIGH WATT STRIP HEATERS (must specify and add price of RMB or TCBI)

Model #	Width	Watts	Ship Weight ♦	List Price ○
GRAIH-18	457 mm	350	5 kg	\$ 548
GRAIH-24	610 mm	500	5 kg	580
GRAIH-30	762 mm	660	5 kg	616
GRAIH-36	914 mm	800	6 kg	653
GRAIH-42	1067 mm	950	7 kg	691
GRAIH-48	1219 mm	1100	7 kg	730
GRAIH-54	1372 mm	1250	8 kg	768
GRAIH-60	1524 mm	1400	9 kg	817
GRAIH-66	1676 mm	1560	10 kg	882
GRAIH-72	1829 mm	1725	11 kg	1000

GLO-RAY ALUMINUM INFRA-BLACK HIGH WATT STRIP HEATERS with LIGHTS (must specify and add price of RMB or TCBI)

Model #	No. of Bulbs	Width	Watts		Ship Weight [±]	List Price [○]
			220V	240V		
GRAIHL-18	2	457 mm	450	470	5 kg	\$ 733
GRAIHL-24	2	610 mm	600	620	6 kg	771
GRAIHL-30	2	762 mm	760	780	7 kg	846
GRAIHL-36	3	914 mm	950	980	8 kg	925
GRAIHL-42	3	1067 mm	1100	1130	9 kg	1008
GRAIHL-48	4	1219 mm	1300	1340	10 kg	1090
GRAIHL-54	4	1372 mm	1450	1490	11 kg	1171
GRAIHL-60	5	1524 mm	1650	1700	12 kg	1275
GRAIHL-66	5	1676 mm	1810	1860	13 kg	1393
GRAIHL-72	6	1829 mm	2025	2085	14 kg	1548

♦ Does not include Remote Control Enclosure (RMB).

○ Does not include Remote Control Enclosure (RMB) or Thermostatic Control Box (TCBI).

Must choose either RMB (see page 74) or TCBI (see OPTIONS on page "GRAIH(L)-(D)" on page 62).

* Available with CE Mark at no added charge, GRAIH(L)-18 through -66 only.

All Glo-Ray Aluminum Infra-Black High Watt Models Feature:

Voltage: 220 or 240, single phase.

Leads: 152 mm leads – server's right.

Dimensions: GRAIH: 457-1829 W x 152 D x 64 H mm.


GRAIHL: 457-1829 W x 229 D x 64 H mm.

TCBI Control Enclosure Dimensions (not including switches): 203 W x 76 D x 64 H mm.

Control Enclosure Location: Chef's left side (unless otherwise specified).

OPTIONS AND ACCESSORIES – PAGE 62

RECOMMENDED MOUNTING HEIGHTS – PAGE 72

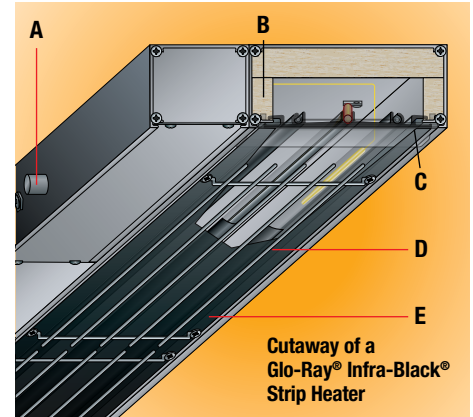


A Thermostatically controlled to regulate heat and provide consistent temperature – optional Remote Control Enclosure (RMB) available

B Heavy-duty insulation minimizes heat loss

C Provides ideal amount of heat for limited space operations, effectively holding product

D Protective wire guard supports heating element without affecting heat distribution

E Infra-Black emitter provides even heat distribution, eliminating hot spots for close applications

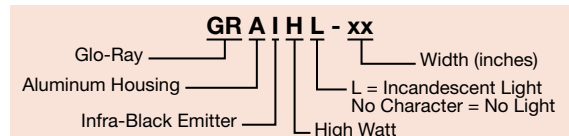

Glo-Ray® Aluminum Infra-Black® High Watt Dual Strip Heaters

continued



GRAIHL-24D in
optional Radiant
Red Gloss Finish



GRAIH-60D

Toggle Switch: Max. 15 Amps
Infinite Switch: Max. 12.2 Amps

GLO-RAY ALUMINIUM INFRA-BLACK HIGH WATT DUAL STRIP HEATERS (must specify and add price of RMB or TCBI)

Model†	Width	Watts	Ship Weight◇	List Price○	
				76 mm Spacer	152 mm Spacer
GRAIH-18D	457 mm	700	6 kg	\$1257	\$1271
GRAIH-24D	610 mm	1000	10 kg	1329	1343
GRAIH-30D	762 mm	1320	10 kg	1437	1456
GRAIH-36D	914 mm	1600	12 kg	1548	1567
GRAIH-42D	1067 mm	1900	16 kg	1663	1682
GRAIH-48D	1219 mm	2200	15 kg	1779	1805
GRAIH-54D	1372 mm	2500	19 kg	1897	1923
GRAIH-60D	1524 mm	2800	21 kg	2049	2089
GRAIH-66D	1676 mm	3120	20 kg	2225	2265
GRAIH-72D	1829 mm	3450	22 kg	2489	2529

GLO-RAY ALUMINIUM INFRA-BLACK HIGH WATT DUAL STRIP HEATERS with LIGHTS (must specify and add price of RMB or TCBI)

Model‡	No. of Bulbs	Width	Watts		Ship Weight◇	List Price○	
			220V	240V		76 mm Spacer	152 mm Spacer
GRAIHL-18D	2	457 mm	800	820	7 kg	\$1343	\$1357
GRAIHL-24D	2	610 mm	1100	1120	5 kg	1417	1431
GRAIHL-30D	2	762 mm	1420	1440	11 kg	1551	1570
GRAIHL-36D	3	914 mm	1750	1780	13 kg	1686	1705
GRAIHL-42D	3	1067 mm	2050	2080	15 kg	1819	1838
GRAIHL-48D	4	1219 mm	2400	2440	16 kg	1950	1976
GRAIHL-54D	4	1372 mm	2700	2740	18 kg	2082	2108
GRAIHL-60D	5	1524 mm	3050	3100	21 kg	2275	2315
GRAIHL-66D	5	1676 mm	3370	3420	20 kg	2483	2523

◇ Does not include Remote Control Enclosure (RMB).

○ Does not include Remote Control Enclosure (RMB) or Thermostatic Control Box (TCBI). Must choose either RMB (see page 74) or TCBI (see OPTIONS on page 62).

* Available with CE Mark at no added charge, GRAIH(L)-18D through -66 only.

All Glo-Ray Aluminum Infra-Black High Watt Dual Feature:

Voltage: 220 or 240, single phase.

Leads: 152 mm leads – server's right.

Dimensions: GRAIH-xxD with Standard 76 mm Spacer: 457-1829 W x 381 D x 64 H mm.

GRAIHL-xxD with Standard 76 mm Spacer: 457-1676 W x 381 D x 64 H mm.

GRAIH-xxD with 152 mm Spacer: 457-1829 W x 457 D x 64 H mm.


GRAIHL-xxD with 152 mm Spacer: 457-1676 W x 457 D x 64 H mm.

TCBI Control Enclosure Dimensions (not including switches): 203 W x 76 D x 64 H mm.

Control Enclosure Location: Chef's left side (Unless otherwise specified).

OPTIONS AND ACCESSORIES – PAGE 62

RECOMMENDED MOUNTING HEIGHTS – PAGE 72

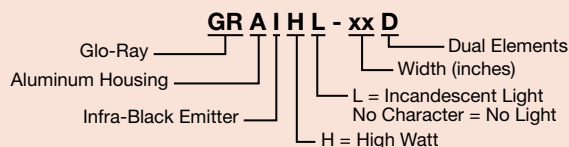


GRAIH-72 with optional wire guard

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Standard –

COLOR-6	152 mm Housing for GRAIH models (Designer Color selections below)	per 305 mm	\$32
COLOR-9	229 mm Housing for GRAIHL models (Designer Color selections below)	per 305 mm	32
COLOR-15, -18	381 mm and 457 mm Housings for GRAIH and GRAIHL Dual models (Designer Color selections below)	per 305 mm	46
RED	Warm Red	GRAY	Gray Granite
BLACK	Black	WHITE	White Granite
		NAVY	Navy Blue
		GREEN	Hunter Green
		COPPER	Antique Copper

Gloss Finishes – Non-standard colors are non-returnable – Clear Anodized Standard –

GLOSS-6	152 mm Housing for GRAIH models (Gloss Finish selections below)	No Charge	
GLOSS-9	229 mm Housing for GRAIHL models (Gloss Finish selections below)	per 305 mm	\$44
GLOSS-15, -18	381 mm and 457 mm Housings for GRAIH and GRAIHL Dual models (Gloss Finish selections below)	per 305 mm	59
RRED	Radiant Red	GGRAY	Glossy Gray
GGOLD	Gleaming Gold	BBLUE	Brilliant Blue
		BBLACK	Bold Black

AIH18WG -AIH72WG	Element Wire Guard (Dual models require two sets)	per 305 mm (per side)	\$33
NO CONTROL	(GRAIH, GRAIHL-xx, GRAIH, GRAIH-xxD models only)		

No control included – Requires selection of RMB2-xx control (see page 74) **No Charge**

RMB	Remote Control Enclosure available in Designer Colors and Gloss Finishes – Non-standard colors are non-returnable – Clear Anodized Standard –	See page 74 for models and prices	
------------	---	-----------------------------------	--

TCBI	Thermostatic Control Box with Indicator Lights		\$219
-------------	--	--	-------

Stands

AIH4NTL	102 mm Non-Adjustable Tubular Stands	1 pair	113
AIH6NTL	152 mm Non-Adjustable Tubular Stands	1 pair	113
AIH7.5NTL-D	191 mm Non-Adjustable Tubular Stands	2 pair	227
AIH8NTL	203 mm Non-Adjustable Tubular Stands (Dual models require two pair)	1 pair	113
AIH10NTL	254 mm Non-Adjustable Tubular Stands (Dual models require two pair)	1 pair	113
AIH12NTL-D	305 mm Non-Adjustable Tubular Stands	2 pair	227
AIH14NTL-D	356 mm Non-Adjustable Tubular Stands	2 pair	242
NTL-PAINT	Designer Color or Gloss Finish to match unit color for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –	1 pair	45
NTL-PAINT-D	Designer Color or Gloss Finish to match unit color for Dual Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –	2 pair	90

Power Leads – Extend beyond Standard 914 mm – Units come with 152 mm pigtail leads (must specify lead length) –

HTLEADS5	305-1525 mm extended Electrical Leads	\$	38
HTLEADS10	1829-3048 mm extended Electrical Leads		76
HTLEADS15	3352-4572 mm extended Electrical Leads		114
HTLEADS20	4877-6096 mm extended Electrical Leads		152

ACCESSORIES (available for purchase at any time)

ADJ ANGLE	Adjustable Angle Brackets (see page 73 for illustration)	1 pair	\$29
ADJ ANGLE7	178 mm tall Adjustable Angle Brackets (see page 73 for illustration)	1 pair	34
ADJ ANGLE-D	Adjustable Angle Brackets for Dual models (see page 73 for illustration)	2 pair	58
ADJ ANGLE7-D	178 mm tall Adjustable Angle Brackets for Dual models (see page 73 for illustration)	2 pair	68
CHAIN 1	Chain Suspension (see page 73 for illustration)	per 305 mm	14

Chef LED 230V adjustable bulb – GRAIHL-xx(D) models only, all voltages, pass-through usage only – see page 45 for more information –

GRAIHL-xx must be 280 mm or higher from surface as pass through – bulbs must be rotated down –
CLED-2700-230 Similar to warm incandescent **CLED-3000-230** Similar to warm halogen light
CLED-4000-230 Similar to cool fluorescent light


Chef LED Bulb

COLORS AND FINISHES – INSIDE BACK COVER

Glo-Ray® Designer Aluminum Infrared Strip Heaters

Hatco Glo-Ray Designer Aluminum Infrared Strip Heaters safely keep all hot foods at optimum serving temperatures longer. This modern design is ideal for front-of-the-house use. Units are offered in continuous housings up to 2223 mm, are available in *Designer Colors* to match most décors and include 356 mm Designer non-adjustable stands.

Toggle Switch: Max. 15 Amps
Infinite Switch: Max. 12.2 Amps

- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food
- Available in widths from 546 to 2223 mm
- Available in a variety of models, configurations, colors and accessories to provide unlimited flexibility – Non-standard colors are non-returnable
- Optional coated, shatter-resistant incandescent lights enhance product displays while safeguarding food from bulb breakage
- Optional Sneeze Guards
- Black corner caps and inset panels standard
- Additional reflector styles and lower wattage elements available, consult factory for more information

continued on next page...



GR2AH-36 with *Designer* non-adjustable stands and optional *Designer Warm Red* inset panels

GLO-RAY DESIGNER ALUMINUM INFRARED STRIP HEATERS (must specify and add price of RMB)

Model*	Width	Watts	Ship Weight*	List Price
Standard Watt				
GR2A-18	546 mm	250	9 kg	\$1311
GR2A-24	699 mm	350	9 kg	1362
GR2A-30	851 mm	450	12 kg	1417
GR2A-36	1003 mm	575	17 kg	1471
GR2A-42	1156 mm	675	17 kg	1527
GR2A-48	1308 mm	800	20 kg	1582
GR2A-54	1460 mm	925	20 kg	1641
GR2A-60	1613 mm	1050	18 kg	1716
GR2A-66	1765 mm	1160	18 kg	1793
GR2A-72	1918 mm	1275	19 kg	1903
GR2A-84	2223 mm	1500	54 kg	2200
High Watt				
GR2AH-18	546 mm	350	12 kg	\$1319
GR2AH-24	699 mm	500	9 kg	1370
GR2AH-30	851 mm	660	12 kg	1425
GR2AH-36	1003 mm	800	12 kg	1479
GR2AH-42	1156 mm	950	15 kg	1535
GR2AH-48	1308 mm	1100	12 kg	1590
GR2AH-54	1460 mm	1250	20 kg	1649
GR2AH-60	1613 mm	1400	18 kg	1724
GR2AH-66	1765 mm	1560	18 kg	1801
GR2AH-72	1918 mm	1725	19 kg	1911
GR2AH-84	2223 mm	2050	21 kg	2216

- When no color is specified, color inset panels and corner caps will be black. Non-standard colors are non-returnable.
- ♦ Does not include Remote Control Enclosure (RMB).
- Does not include Remote Control Enclosure (RMB). Must choose RMB (see page 74).
- * Available with CE Mark, add \$10.

All Glo-Ray Designer Aluminum Infrared Models Feature:

Voltage: 220 or 240, single phase.

Switch Location: Remote only (see page 74).


Leads: 1524 mm leads through ½" conduit in leg cavity.

Dimensions without Stands: 546-2223 W x 305 D x 89 H mm.


OPTIONS AND ACCESSORIES – PAGE 65

RECOMMENDED MOUNTING HEIGHTS – PAGE 72

Cutaway of a *Designer Glo-Ray®* Infrared Strip Heater

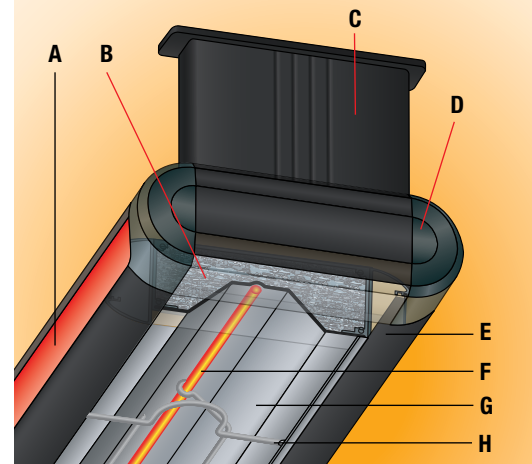

- A** Choice of seven *Designer Color* inset panels and attractive styling for front-of-the-house applications
- B** Heavy-duty insulation minimizes heat loss
- C** Non-adjustable stand conceals the power wiring, available for counter or overhead mounting
- D** Accent color corners available in Dark Gray or Black (standard)
- E** Sturdy aluminum extrusion construction; available in clear anodized aluminum finish (standard) or one of seven *Designer Colors* for housings (shown in optional *Designer Black*)
- F** Long life metal-sheathed heating element
- G** Aluminized reflectors won't discolor, so heat can be reflected and directed to the food product being held
- H** Protective wire guard supports heating element without affecting heat distribution




Glo-Ray® Designer Aluminum Infrared Strip Heaters

continued



GR2AHL-24 with Designer non-adjustable stands and optional Sneeze Guards and Designer Hunter Green inset panels

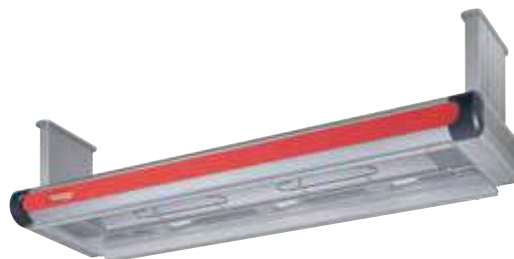

GR2AHL-36 with optional overhead mounts and Designer Warm Red inset panels

Strip Heaters

GLO-RAY DESIGNER ALUMINUM INFRARED STRIP HEATERS with LIGHTS (must specify and add price of RMB)

Model •	No. of Bulbs	Width	Watts	Ship Weight ♦	List Price ○ ‡
Standard Watt					
GR2AL-18	2	546 mm	370	15 kg	\$1492
GR2AL-24	2	699 mm	470	11 kg	1551
GR2AL-30	2	851 mm	570	13 kg	1640
GR2AL-36	3	1003 mm	755	15 kg	1738
GR2AL-42	3	1156 mm	855	16 kg	1839
GR2AL-48	4	1308 mm	1040	16 kg	1943
GR2AL-54	4	1460 mm	1165	22 kg	2049
GR2AL-60	5	1613 mm	1350	24 kg	2160
GR2AL-66	5	1765 mm	1460	26 kg	2280
GR2AL-72	6	1918 mm	1635	26 kg	2430
GR2AL-84	7	2223 mm	1920	28 kg	2628
High Watt					
GR2AHL-18	2	546 mm	470	12 kg	\$1500
GR2AHL-24	2	699 mm	620	11 kg	1559
GR2AHL-30	2	851 mm	780	13 kg	1648
GR2AHL-36	3	1003 mm	980	15 kg	1746
GR2AHL-42	3	1156 mm	1130	16 kg	1847
GR2AHL-48	4	1308 mm	1340	22 kg	1951
GR2AHL-54	4	1460 mm	1490	22 kg	2057
GR2AHL-60	5	1613 mm	1700	25 kg	2168
GR2AHL-66	5	1765 mm	1860	26 kg	2288
GR2AHL-72	6	1918 mm	2085	26 kg	2438
GR2AHL-84	7	2223 mm	2470	28 kg	2636

• When no color is specified, color inset panels and corner caps will be black. Non-standard colors are non-returnable.

♦ Does not include Remote Control Enclosure (RMB).

○ Does not include Remote Control Enclosure (RMB). Must choose RMB (see page 74).

‡ Available with CE Mark, add \$10.

All Glo-Ray Designer Aluminum Infrared Models with Lights Feature:

Voltage: 220 or 240, single phase.

Switch Location: Remote only (see page 74).

Leads: 1524 mm leads through ½" conduit in leg cavity.

Dimensions without Stands: 546-2223 W x 305 D x 89 H mm.

OPTIONS AND ACCESSORIES – PAGE 65

RECOMMENDED MOUNTING HEIGHTS – PAGE 72





GR2AHL-84 with standard *Designer* non-adjustable stands and optional *Designer* Black, inset panels and Sneeze Guards

OPTIONS (available at time of purchase only)

Designer Colors for aluminum models 546-2223 mm – includes stands –

Non-standard colors are non-returnable – Clear Anodized Standard –

COLOR-6	229 mm Housing for GR2A and GR2AH models (<i>Designer</i> Color selection below)	per 305 mm	\$32
COLOR-9	305 mm Housing for GR2AL and GR2AHL models (<i>Designer</i> Color selection below)	per 305 mm	32

RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

Designer Inset Panel Colors – Non-standard colors are non-returnable – Black Standard – No Charge

RED	Warm Red	WHITE	White Granite	GREEN	Hunter Green
GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper

Designer Corner Caps – Non-standard colors are non-returnable – Black Standard – No Charge

DKGRAY Dark Gray Corner Caps

RMB Remote Control Enclosure (required) see page 74 for models and prices

NO CONTROL No control included (GR2A, GR2AL, models only) – Requires selection of RMB2-xx control (see page 74) No Charge

Designer Remote Control Enclosures – Non-standard colors are non-returnable – Clear Anodized Standard –

Designer Remote Control Enclosures		Non-Standard Colors are Non-Returnable		Great Anticized Standard		
RMB-COLOR	Remote Control Enclosure Housing in <i>Designer</i> Color					\$46
RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green	

Sneeze Guards

7.5BP1	191 mm Sneeze Guard - one side	per 305 mm	\$ 71
7.5BP2	191 mm Sneeze Guard - two sides	per 305 mm	142
14BP1	356 mm Sneeze Guard - one side	per 305 mm	113
14BP2	356 mm Sneeze Guard - two sides	per 305 mm	226

NTL2-10, -12, -16 *Designer* Color Non-Adjustable Stands to match unit color: 254, 305 or 406 mm in lieu of Standard 356 mm Stands – Non-standard colors are non-returnable – No Charge

NTH2-4 102 mm *Designer* Color Overhead Mounts to match unit color in lieu of 356 mm Standard Legs – Non-standard colors are non-returnable – No Charge

NO BULB No bulb option (GR2AL, GR2AHL models only) 63

LIGHTS-ADD'L Extra Lamps – Installed (max. two per 305 mm less one) – one per 305 mm is Standard each 32

Power Leads – Extended beyond Standard 1524 mm conduit (must specify lead length) –

LEADS5	305-1525 mm extended Electrical Leads	\$27
LEADS10	1829-3048 mm extended Electrical Leads	54
LEADS15	3352-4572 mm extended Electrical Leads	81
LEADS20	4877-6096 mm extended Electrical Leads	108

ACCESSORIES (available for purchase at any time)

Chef LED 230V adjustable bulb – GR2AL, GR2AHL models only, all voltages – see page 45 for more information – \$129

GR2AHL requires pass-through usage only and unit must be 254 mm or higher from surface –

Bulbs must be rotated down –

CLED-2700-230 Similar to warm incandescent **CLED-3000-230** Similar to warm halogen light

CLED-4000-230 Similar to cool fluorescent light



Chef LED Bulb

COLORS AND FINISHES – INSIDE BACK COVER

Glo-Ray® Designer Aluminum Dual Infrared Strip Heaters

Glo-Ray Designer Aluminum Dual Infrared Strip Heaters allow side-by-side mounting of two warmers to provide a deeper holding area, keeping hot food at optimum serving temperatures. These modern front-of-the-house warmers have 76 mm spacers standard with optional 152 mm spacers. Units are available in optional Designer Colors to match most décors.

- Sturdy continuous aluminum housings eliminate sagging
- Pre-focused heat pattern directs heat from a tubular element to bathe the entire holding surface, holding food safely
- Available in widths from 546 to 2223 mm
- Variety of models, configurations, colors and accessories provide unlimited flexibility – Non-standard colors are non-returnable
- Optional Sneeze Guards, that meet food safety standards, can be ordered for display areas and buffet lines
- Optional shatter-resistant incandescent lights available
- Black corner caps and inset panels standard
- Additional reflector styles and lower wattage elements available, consult factory for more information



GR2AH-24D with standard Designer non-adjustable stands, optional Sneeze Guards and Designer Navy Blue inset panels

Toggle Switch: Max. 15 Amps
Infinite Switch: Max. 12.2 Amps

GLO-RAY DESIGNER ALUMINUM DUAL INFRARED STRIP HEATERS (must specify and add price of RMB)

Model*	Width	Watts	Ship Weight [◇]	List Price [○] [‡]	
				76 mm Spacer	152 mm Spacer
Standard Watt					
GR2A-18D	546 mm	500	13 kg	\$1899	\$1913
GR2A-24D	699 mm	700	14 kg	1973	1987
GR2A-30D	851 mm	900	17 kg	2085	2104
GR2A-36D	1003 mm	1150	17 kg	2201	2220
GR2A-42D	1156 mm	1350	19 kg	2319	2338
GR2A-48D	1308 mm	1600	20 kg	2436	2462
GR2A-54D	1460 mm	1850	24 kg	2555	2581
GR2A-60D	1613 mm	2100	27 kg	2706	2732
GR2A-66D	1765 mm	2320	70 kg	2859	2899
GR2A-72D	1918 mm	2550	29 kg	3086	3126
GR2A-84D	2223 mm	3000	38 kg	3354	3408
High Watt					
GR2AH-18D	546 mm	700	20 kg	\$1915	\$1929
GR2AH-24D	699 mm	1000	13 kg	1989	2003
GR2AH-30D	851 mm	1320	17 kg	2101	2120
GR2AH-36D	1003 mm	1600	17 kg	2217	2236
GR2AH-42D	1156 mm	1900	22 kg	2335	2354
GR2AH-48D	1308 mm	2200	25 kg	2452	2478
GR2AH-54D	1460 mm	2500	27 kg	2571	2597
GR2AH-60D	1613 mm	2800	25 kg	2722	2762
GR2AH-66D	1765 mm	3120	29 kg	2875	2915
GR2AH-72D	1918 mm	3450	28 kg	3102	3142
GR2AH-84D	2223 mm	4100	48 kg	3370	3424

• When no color is specified, color inset panels and corner caps will be black – Non-standard colors are non-returnable.

♦ Does not include Remote Control Enclosure (RMB).

○ Does not include Remote Control Enclosure (RMB). Must choose RMB (see page 74).

‡ Available with CE Mark, add \$20 (see specifics below).

GR2A-18D through -84D available with CE mark.

GR2AH-18D through -84D available with CE mark. (GR2AH-72D, -84D require Remote Control Enclosure (RMB), see page 74).

All Glo-Ray Designer Aluminium Dual Infrared Models Feature:


Voltage: 220 or 240, single phase.

Switch Location: Remote only (see page 74).

Leads: 1524 mm leads through ½" conduit in leg cavity.


Dimensions: with 76 mm Spacer (standard): 546-2223 W x 457 D x 89 H mm.
with 152 mm Spacer: 546-2223 W x 533 D x 89 H mm.

OPTIONS AND ACCESSORIES – PAGE 68
RECOMMENDED MOUNTING HEIGHTS – PAGE 72



Glo-Ray® Designer Aluminum Dual Infrared Strip Heaters

continued

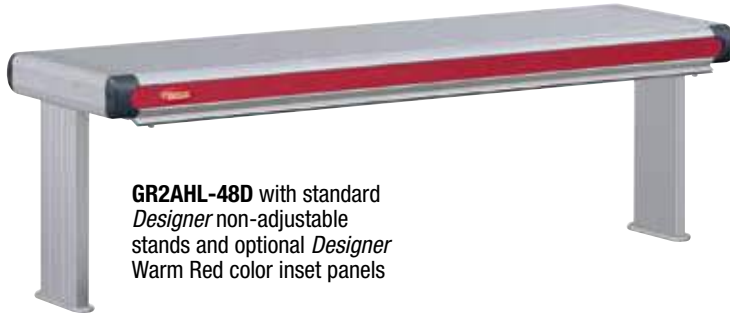

GR2AHL-48D with standard Designer non-adjustable stands and optional Designer Warm Red color inset panels

Toggle Switch: Max. 15 Amps
Infinite Switch: Max. 12.2 Amps

GLO-RAY DESIGNER ALUMINUM DUAL INFRARED STRIP HEATERS with LIGHTS (must specify and add price of RMB)

Model*	No. of Bulbs	Width	Watts	Ship Weight◇	List Price○*	
					76 mm Spacer	152 mm Spacer
Standard Watt						
GR2AL-18D	2	546 mm	620	20 kg	\$1989	\$2003
GR2AL-24D	2	699 mm	820	15 kg	2064	2078
GR2AL-30D	2	851 mm	1020	24 kg	2194	2213
GR2AL-36D	3	1003 mm	1330	18 kg	2336	2355
GR2AL-42D	3	1156 mm	1530	21 kg	2470	2489
GR2AL-48D	4	1308 mm	1840	21 kg	2609	2635
GR2AL-54D	4	1460 mm	2090	23 kg	2749	2775
GR2AL-60D	5	1613 mm	2400	25 kg	2931	2971
GR2AL-66D	5	1765 mm	2620	30 kg	3117	3157
GR2AL-72D	6	1918 mm	2910	34 kg	3369	3409
GR2AL-84D	7	2223 mm	3420	37 kg	3704	3758
High Watt						
GR2AHL-18D	2	546 mm	820	20 kg	\$2005	\$2019
GR2AHL-24D	2	699 mm	1120	15 kg	2080	2094
GR2AHL-30D	2	851 mm	1440	16 kg	2210	2229
GR2AHL-36D	3	1003 mm	1780	18 kg	2352	2371
GR2AHL-42D	3	1156 mm	2080	21 kg	2486	2505
GR2AHL-48D	4	1308 mm	2440	21 kg	2625	2651
GR2AHL-54D	4	1460 mm	2740	23 kg	2765	2791
GR2AHL-60D	5	1613 mm	3100	25 kg	2947	2987
GR2AHL-66D	5	1765 mm	3420	30 kg	3133	3173
GR2AHL-72D	6	1918 mm	3810	34 kg	3385	3425
GR2AHL-84D	7	2223 mm	4520	37 kg	3720	3774

* When no color is specified, color inset panels and corner caps will be black – Non-standard colors are non-returnable.

◇ Does not include Remote Control Enclosure (RMB).

○ Does not include Remote Control Enclosure (RMB). Must choose RMB (see page 74).

‡ Available with CE Mark, add \$20 (see specifics below).

GR2AL-18D through -84D available with CE mark.

GR2AHL-18D through -84D available with CE mark (GR2AHL-72D, -84D require Remote Control Enclosure (RMB), see page 74).

All Glo-Ray Designer Aluminium Dual Infrared with Lights Models Feature:

Voltage: 220 or 240, single phase.


Switch Location: Remote only (see page 68).

Leads: 1524 mm leads through ½" conduit in leg cavity.

Dimensions: with 76 mm Spacer (standard): 546-2223 W x 457 D x 89 H mm.
with 152 mm Spacer: 546-2223 W x 533 D x 89 H mm.

OPTIONS AND ACCESSORIES – PAGE 68

RECOMMENDED MOUNTING HEIGHTS – PAGE 72

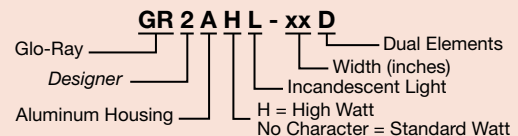



GR2AHL-30D

OPTIONS (available at time of purchase only)

Designer Colors, aluminum models 546-2223 mm – includes stands –

Non-standard colors are non-returnable – Clear Anodized standard –

COLOR-15, -18	381 mm and 457 mm Housings for GR2A, GR2AH, GR2AL and GR2AHL Dual models	per 305 mm	\$46
RED	Warm Red		
BLACK	Black		
GRAY	Gray Granite		
WHITE	White Granite		
NAVY	Navy Blue		
GREEN	Hunter Green		
COPPER	Antique Copper		

Designer Inset Panel colors – Non-standard colors are non-returnable – Black standard –

No Charge

RED	Warm Red	WHITE	White Granite	GREEN	Hunter Green
GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper

Designer Corner Caps – Non-standard colors are non-returnable – Black standard –

No Charge

DKGRAY Dark Gray Corner Caps

RMB Remote Control Enclosure (required)

see page 74 for models and prices

NO CONTROL No Control included (GR2A-xxD, GR2AL-xxD, models only) – requires selection of RMB2-xx control (see page 74)

No Charge

Designer Remote Control Enclosures – Non-standard colors are non-returnable – Clear Anodized standard –

RMB-COLOR Remote Control Enclosure Housing in Designer Color

\$ 46

RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

Sneeze Guards

7.5BP1	191 mm Sneeze Guard - one side	per 305 mm	\$ 71
7.5BP2	191 mm Sneeze Guard - two sides	per 305 mm	142
14BP1	356 mm Sneeze Guard - one side	per 305 mm	113
14BP2	356 mm Sneeze Guard - two sides	per 305 mm	226

NTL2-10, -12, -16 Designer Non-Adjustable Stands: 254, 305 or 406 mm in lieu of 356 mm standard Legs – Non-standard colors are non-returnable – Clear Anodized standard –

No Charge

NTH2-4 102 mm Designer Overhead Mounts in lieu of 356 mm standard Stands – Non-standard colors are non-returnable – Clear Anodized standard –

No Charge

NO BULB No bulb option (GR2AL-xxD, GR2AHL-xxD models only)

No Charge

LIGHTS-ADD'L Extra Lamps installed – max. two per 305 mm less one – one per 305 mm is standard

each 32

Power Leads – Must specify lead length –

LEADS5	305-1525 mm extended Electrical Leads	\$27
LEADS10	1829-3048 mm extended Electrical Leads	54
LEADS15	3352-4572 mm extended Electrical Leads	81
LEADS20	4877-6096 mm extended Electrical Leads	108

ACCESSORIES (available for purchase at any time)

Chef LED 230V adjustable bulb – GR2AL-xxD, GR2AHL-xxD models only, all voltages – see page 45 for more information –

\$129

GR2AL-xxD requires pass-through usage only and unit must be 381 mm or higher from surface GR2AHL-xxD requires pass-through usage only and unit must be 457 mm or higher from surface – Bulbs must be rotated down –

CLED-2700-230 Similar to warm incandescent **CLED-3000-230** Similar to warm halogen light

CLED-4000-230 Similar to cool fluorescent light



Chef LED Bulb

COLORS AND FINISHES – INSIDE BACK COVER


Ultra-Glo® Aluminum Ceramic Infrared Strip Heaters

Hatco Ultra-Glo Aluminum Ceramic Strip Heaters provide the ultimate holding power. Increased heights improve working clearances and the heat zone blankets the entire holding area. All models include adjustable angle brackets for mounting. Available with or without lights, with attached or the recommended Remote Control Box Enclosure (RMB).



UGAH-18 with optional Gloss Finish (requires Remote Control Enclosure (RMB) – not shown)

- Pre-focused pyramidal heat pattern, concentrates the heat at the edges where heat loss is the greatest
- Increased height improves operational working clearances, giving the chef and server an improved ergonomic working environment
- Adaptable to many locations and configurations, including back-or front-of-the-house use, open kitchen concepts or buffet lines
- Optional, coated shatter-resistant, incandescent bulbs enhance product displays, while safeguarding food from bulb breakage

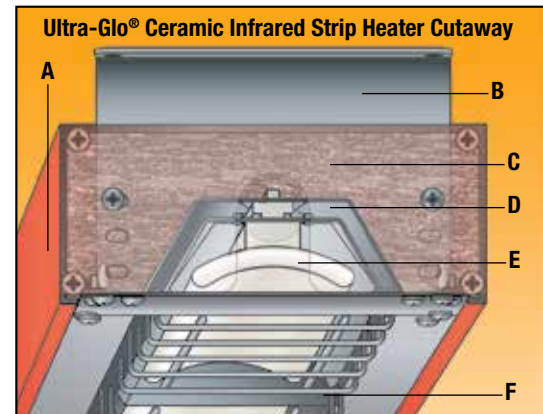

- A** Sturdy aluminum housings that do not sag, widths from 457 up to 1829 mm in 152 mm increments
- B** Adjustable standard mounting bracket (allows three different mounting heights and allows for conduit connection to end of the unit)
- C** Heavy-duty insulation surrounds heating element to keep exterior housing cooler and minimize heat loss
- D** Dual aluminized steel reflector keeps housing cooler, focuses more heat towards the food
- E** Shape of element focuses the heat on the food
- F** Protective wire guard supports heating element without affecting heat distribution

ULTRA-GLO ALUMINUM CERAMIC INFRARED STRIP HEATERS

Model*	Width	Watts 220V 240V	Ship Weight [◇]	List Price
Standard Watt				
UGA-18	457 mm	546 500	4 kg	\$ 784
UGA-24	610 mm	630 650	5 kg	795
UGA-30	762 mm	756 900	6 kg	957
UGA-36	914 mm	1092 1000	7 kg	968
UGA-42	1067 mm	1260 1200	8 kg	1127
UGA-48	1219 mm	1638 1500	9 kg	1138
UGA-54	1372 mm	1638 1500	9 kg	1289
UGA-60	1524 mm	2185 2000	10 kg	1301
UGA-66	1676 mm	2185 2000	11 kg	1455
UGA-72	1829 mm	2520 2000	11 kg	1488
High Watt				
UGAH-18	457 mm	630 650	5 kg	\$ 792
UGAH-24	610 mm	756 750	4 kg	803
UGAH-30	762 mm	945 1125	5 kg	965
UGAH-36	914 mm	1260 1300	7 kg	976
UGAH-42	1067 mm	1680 1500	7 kg	1135
UGAH-48	1219 mm	1890 1950	9 kg	1146
UGAH-54	1372 mm	2268 2250	9 kg	1297
UGAH-60	1524 mm	2520 2600	11 kg	1309
UGAH-66	1676 mm	2520 2600	10 kg	1463
UGAH-72	1829 mm	3025 3000	11 kg	1496

ULTRA-GLO ALUMINUM CERAMIC INFRARED STRIP HEATERS with LIGHTS

Model * [◇]	No. of Bulbs	Width	Watts 220V 240V	Ship Weight [◇]	List Price
Standard Watt					
UGAL-18	1	457 mm	596 560	5 kg	\$ 961
UGAL-24	2	610 mm	730 770	5 kg	979
UGAL-30	2	762 mm	856 1020	7 kg	1177
UGAL-36	3	914 mm	1242 1180	9 kg	1225
UGAL-42	3	1067 mm	1410 1380	10 kg	1414
UGAL-48	4	1219 mm	1838 1740	10 kg	1462
UGAL-54	4	1372 mm	1838 1740	12 kg	1654
UGAL-60	5	1524 mm	2434 2300	14 kg	1713
UGAL-66	5	1676 mm	2434 2300	14 kg	1892
UGAL-72	6	1829 mm	2820 2360	15 kg	1952
High Watt					
UGAHL-18	1	457 mm	680 710	5 kg	\$ 969
UGAHL-24	2	610 mm	856 870	5 kg	987
UGAHL-30	2	762 mm	1045 1245	8 kg	1185
UGAHL-36	3	914 mm	1410 1480	8 kg	1233
UGAHL-42	3	1067 mm	1830 1680	9 kg	1422
UGAHL-48	4	1219 mm	2090 2190	10 kg	1470
UGAHL-54	4	1372 mm	2468 2490	11 kg	1662
UGAHL-60	5	1524 mm	2770 2900	12 kg	1721
UGAHL-66	5	1676 mm	2770 2900	14 kg	1900
UGAHL-72	6	1829 mm	3324 3360	15 kg	1960

* CE Mark not available.

◇ Does not include Remote Control Enclosure (RMB).

♦ Models with Lights pricing includes RMB-UGA, unit can also be supplied with no switches.

All Ultra-Glo Aluminum Ceramic Infrared Models Feature:

Voltage: 220, 240, single phase.

Models Shipped with: Angle Brackets and 152 mm Leads.

Dimensions with Attached Remote Control Enclosure (RMB), Toggle and Indicator Light:

457-1829 W x 251 D x 64 H mm.

Dimensions with Remote Control Enclosure (RMB), Toggle and Indicator Light:

457-1829 W x 152 D x 64 H mm.

Contact factory for stainless marine applications.

OPTIONS AND ACCESSORIES – PAGE 71

RECOMMENDED MOUNTING HEIGHTS – PAGE 72

REMOTE CONTROL ENCLOSURES (RMB) – PAGE 74


Ultra-Glo **UG A H L - xx**
 Aluminum Housing Width (inches)
 H = High Watt L = Incandescent Light
 No Character = Standard Watt No Character = No Lights

Ultra-Glo® Aluminum Ceramic Dual Infrared Strip Heaters

Hatco Ultra-Glo Aluminium Ceramic Dual Infrared Strip Heaters provide the ultimate holding power. Increased height improves working clearances and the heat zone blankets the entire holding area. All models include adjustable angle brackets for mounting. Dual mounted strip heaters accommodate wider food holding areas.

- Increased height that the ceramic heat source affords improves operational working clearances, giving the chef and server an improved ergonomic environment in which to work
- Adaptable to any location and configuration including back- or front-of-the-house use, open kitchen concepts or buffet lines

- Sturdy continuous aluminum housings eliminate sagging
- Available in widths from 457 to 1829 mm
- Pre-focused heat pattern provides an increased pyramidal dimension, concentrating heat at the edges where heat loss is the greatest

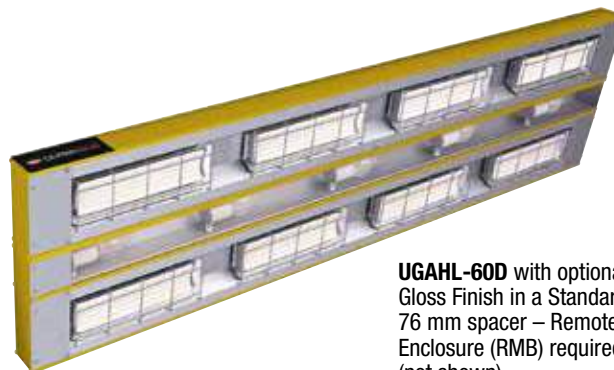

UGAHL-60D with optional Gloss Finish in a Standard 76 mm spacer – Remote Control Enclosure (RMB) required (not shown)

Strip Heaters

ULTRA-GLO ALUMINUM CERAMIC DUAL INFRARED STRIP HEATERS

Model*	Width	Watts		Ship Weight [◇]	List Price
		220V	240V		
Standard Watt					
UGA-18D	457 mm	1092	1000	8 kg	\$1557
UGA-24D	610 mm	1260	1300	9 kg	1623
UGA-30D	762 mm	1512	1800	12 kg	1969
UGA-36D	914 mm	2184	2000	14 kg	2034
UGA-42D	1067 mm	2520	2400	15 kg	2383
UGA-48D	1219 mm	2520	3000	18 kg	2445
UGA-54D	1372 mm	2520	3000	19 kg	2787
UGA-60D	1524 mm	4368	4000	22 kg	2861
UGA-66D	1676 mm	4368	4000	23 kg	3199
UGA-72D	1829 mm	5040	4000	24 kg	3298
High Watt					
UGAH-18D	457 mm	1260	1300	8 kg	\$1573
UGAH-24D	610 mm	1512	1500	9 kg	1639
UGAH-30D	762 mm	1890	2250	11 kg	1985
UGAH-36D	914 mm	2520	2600	14 kg	2050
UGAH-42D	1067 mm	3360	3000	15 kg	2399
UGAH-48D	1219 mm	3780	3900	18 kg	2461
UGAH-54D	1372 mm	4536	4500	19 kg	2803
UGAH-60D	1524 mm	5040	5200	22 kg	2877
UGAH-66D	1676 mm	5040	5200	23 kg	3215
UGAH-72D	1829 mm	6048	6000	25 ka	3314

* CE Mark, not available.

◇ Does not include Remote Control Enclosure (RMB).

◆ Models will be supplied without switches, remote switches are optional

All Ultra-Glo Aluminum Ceramic Dual Infrared Models Feature:

Voltage: 220, 240, single phase.

Models Shipped with: Angle Brackets and 152 mm Leads.).


Dimensions with Attached Control Box, Toggle and Indicator Light: 457-1829 W x 479 D x 64 H mm.

Dimensions with Remote Control Enclosure (RMB), Toggle and Indicator Light: 457-1829 W x 381 D x 64 H mm.

OPTIONS AND ACCESSORIES – PAGE 71

RECOMMENDED MOUNTING HEIGHTS – PAGE 72

REMOTE CONTROL ENCLOSURES (RMB) – PAGE 74



ULTRA-GLO ALUMINUM CERAMIC DUAL INFRARED STRIP HEATERS with LIGHTS

Model * ♦	No. of Bulbs	Width	Watts		Ship Weight ♦	List Price
			220V	240V		
Standard Watt						
UGAL-18D	1	457 mm	1142	1060	8 kg	\$1632
UGAL-24D	2	610 mm	1360	1420	10 kg	1664
UGAL-30D	2	762 mm	1612	1920	12 kg	2074
UGAL-36D	3	914 mm	2334	2180	14 kg	2165
UGAL-42D	3	1067 mm	2670	2580	16 kg	2548
UGAL-48D	4	1219 mm	2720	3240	14 kg	2631
UGAL-54D	4	1372 mm	2666	3240	19 kg	3011
UGAL-60D	5	1524 mm	4618	4300	23 kg	3098
UGAL-66D	5	1676 mm	4618	4300	23 kg	3463
UGAL-72D	6	1829 mm	5340	4360	25 kg	3586
High Watt						
UGAHL-18D	1	457 mm	1310	1360	8 kg	\$1648
UGAHL-24D	2	610 mm	1612	1620	7 kg	1680
UGAHL-30D	2	762 mm	1990	2370	11 kg	2090
UGAHL-36D	3	914 mm	2670	2780	12 kg	2181
UGAHL-42D	3	1067 mm	3510	3180	15 kg	2564
UGAHL-48D	4	1219 mm	3980	4140	16 kg	2647
UGAHL-54D	4	1372 mm	4736	4740	20 kg	3027
UGAHL-60D	5	1524 mm	5290	5500	22 kg	3114
UGAHL-66D	5	1676 mm	5290	5500	23 kg	3479
UGAHL-72D	6	1829 mm	6348	6360	26 kg	3602

OPTIONS (available at time of purchase only)**Designer Colors, aluminum models 457-1829 mm – Non-standard colors are non-returnable – Clear Anodized Standard –**

COLOR-6	152 mm Housing for Single UGA and UGAH models (<i>Designer Color</i> selection below)	per 305 mm	\$32
COLOR-9	229 mm Housing for Single UGAL and UGAHL models (<i>Designer Color</i> selection below)	per 305 mm	32
COLOR-15, -18	381 mm and 457 mm Housings for Dual UGA, UGAH, UGAL, UGAHL (<i>Designer Color</i> selection below)	per 305 mm	46
	RED Warm Red GRAY Gray Granite NAVY Navy Blue COPPER Antique Copper		
	BLACK Black WHITE White Granite GREEN Hunter Green		

Gloss Finishes, aluminum models 457-1829 mm – Non-standard colors are non-returnable – Clear Anodized Standard –

GLOSS-6	152 mm Housing for Single UGA and UGAH models (Gloss Finish selection below)	per 305 mm	\$44
GLOSS-9	229 mm Housing for Single UGAL and UGAHL models (Gloss Finish selection below)	per 305 mm	44
GLOSS-15, -18	381 mm and 457 mm Housings for Dual UGA, UGAH, UGAL, UGAHL models (Gloss Finish selection below)	per 305 mm	59
	RRED Radiant Red GGRAY Glossy Gray BBLACK Bold Black		
	GGOLD Gleaming Gold BBLUE Brilliant Blue		

Designer Colors, Remote Control Enclosures – Non-standard colors are non-returnable – Clear Anodized Standard –

RMB-COLOR	Remote Control Enclosure Housing in <i>Designer Color</i>		46
	RED Warm Red GRAY Gray Granite NAVY Navy Blue COPPER Antique Copper		
	BLACK Black WHITE White Granite GREEN Hunter Green		

Gloss Finishes, Remote Control Enclosures – Non-standard colors are non-returnable – Clear Anodized Standard –

RMB-GLOSS	Remote Control Enclosure Housing in Gloss Finish		66
	RRED Radiant Red GGRAY Glossy Gray BBLACK Bold Black		
	GGOLD Gleaming Gold BBLUE Brilliant Blue		

LIGHTS-ADD'L	Extra Lamps installed (max. two per 305 mm less one), one per 305 mm is Standard – Not available for Dual models	each	32
---------------------	--	------	----

Stands

UGA-NTL-14, -16	Non-Adjustable Tubular Stands – specify 356 or 406 mm clearance	1 pair	\$121
UGA-NTL-18, -20	Non-Adjustable Tubular Stands – specify 457 or 508 mm clearance	1 pair	129
UGA-NTL-22, -24	Non-Adjustable Tubular Stands – specify 559 or 610 mm clearance	1 pair	140
UGA-NTL-18-D, -20-D	Non-Adjustable Tubular Stands – specify 457 or 508 mm clearance	2 pair	258
UGA-NTL-22-D, -24-D, -26-D	Non-Adjustable Tubular Stands – specify 559, 610 or 660 mm clearance	2 pair	279
NTL-PAINT	<i>Designer Color</i> or Gloss Finish to match unit color for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –	1 pair	45
NTL-PAINT-D	<i>Designer Color</i> or Gloss Finish to match unit color for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –	2 pair	90

Power Leads – Extend beyond Standard 914 mm conduit (must specify lead length) –

HTLEADS5	305-1525 mm extended Electrical Leads		\$ 38
HTLEADS10	1829-3048 mm extended Electrical Leads		76
HTLEADS15	3352-4572 mm extended Electrical Leads		114
HTLEADS20	4877-6096 mm extended Electrical Leads		152

RMB-UGA

Remote Control Enclosure with Toggle Control and Indicator in lieu of attached control box – not available on Dual models

Designer Color and Gloss Finish available – Non-standard colors are non-returnable – Clear Anodized Standard –

No Charge

RED Warm Red GRAY Gray Granite NAVY Navy Blue COPPER Antique Copper	
BLACK Black WHITE White Granite GREEN Hunter Green	
RRED Radiant Red GGRAY Glossy Gray BBLACK Bold Black	
GGOLD Gleaming Gold BBLUE Brilliant Blue	

RMB-UGA-INF

Remote Control Enclosure with Toggle Switch, Electronic Infinite Control, Relay and Indicator Light in lieu of attached

control box – Not available for 240V with lights – *Designer Colors* and Gloss Finishes available –

Non-standard colors are non-returnable – Clear Anodized Standard –

\$448

RED Warm Red GRAY Gray Granite NAVY Navy Blue COPPER Antique Copper	
BLACK Black WHITE White Granite GREEN Hunter Green	
RRED Radiant Red GGRAY Glossy Gray BBLACK Bold Black	
GGOLD Gleaming Gold BBLUE Brilliant Blue	

ACCESSORIES (available for purchase at any time)**Chef LED 230V adjustable bulb – UGA(H)L-xx, UGA(H)L-xxD models only, all voltages, pass through usage only –****Bulbs must be rotated down – See page 45 for more information –**

\$129

UGAL-xx must be 356 mm or higher from surface, UGAHL-xx must be 432 mm or higher from surface,

UGA(H)L-xxD unit must be 456 mm or higher from surface – all require pass-through usage only

CLED-2700-230 Similar to warm incandescent **CLED-3000-230** Similar to warm halogen light**CLED-4000-230** Similar to cool fluorescent light**COLORS AND FINISHES – INSIDE BACK COVER**


Chef LED Bulb



RMB-UGA-INF



Strip Heater Recommended Range Above Target* and Spacing Requirements (based on 610 mm strip heaters, non-flammable surface)

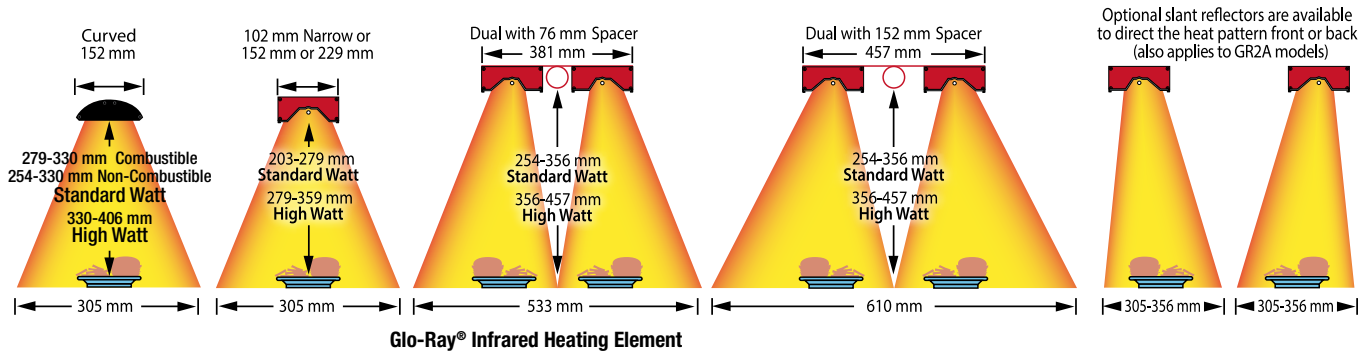

GLO-RAY® INFRARED

Curved Standard Watt (GR5A, (GR5AH, GR5AL, GR5AHL)

Minimum combustible surface: Install a minimum of 26 mm from back wall, 26 mm from overshef and 279 mm above surface.

Minimum non-combustible surface: 26 mm from overshef and 254 mm above surface (back of wall: no requirement).

Curved High Watt (GR5AH, GR5AHL)

Non-combustible surroundings only. Install 26 mm from overshef and minimum of 330 mm above a non-combustible countertop surface (back of wall: no requirement).

Singles (GRA, GRAL, GRAH, GRAHL, GRN)

Singles Designer (GR2A, GR2AH, GR2AL, GR2AHL)

Combustibles: 343 mm high watt or 254 mm standard watt below, 25 mm above and 76 mm to back wall.

Non-combustibles: 25 mm above, 254 mm below for high watt with infinite or indicator lamp and 203 mm below for high watt toggle or standard watt. Must be installed in a pass-through area. Units with remote switches may be installed against a non-combustible back wall, flush to an overshef and 203 mm to a surface below. Maximum 254 mm setback from the front of an overshef.


Models with cords must be installed 76 mm below an overshef and 279 mm high watt or 254 mm standard watt over a surface below.

Duals (GRA-D, GRAH-D, GRAL-D, GRAHL-D)

Duals Designer (GR2A-D, GR2AH-D, GR2AL-D, GR2AHL-D)

May not be installed in combustible surroundings.

Non-combustibles: 25 mm above, 254 mm below. Must be installed in a pass-through area. Units with remote switches may be installed 76 mm from a non-combustible back wall, 203 mm from surface below and flush to an overshef. Maximum 254 mm setback from the front of an overshef.

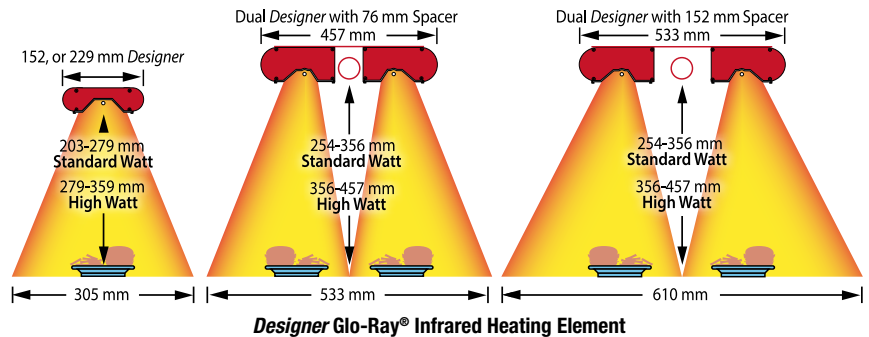


ULTRA-GLO®

Singles and Duals (UGA, UGA-D, UGAH, UGAH-D, UGAL, UGAL-D, UGAHL, UGAHL-D)

May not be installed in combustible surroundings.

Non-combustibles: 25 mm above, 432 mm high watt or 356 mm standard watt from a surface below and 76 mm from a back wall.

Dual Mounting Do not mount warmers side by side (dual mounting) with less than a 76 mm space between units.

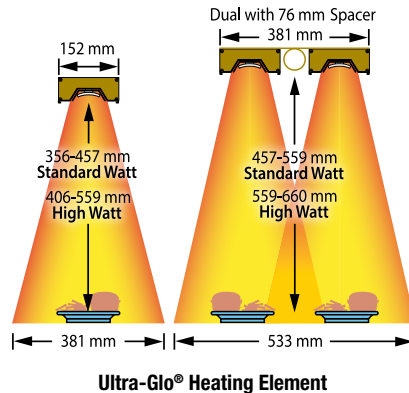


GLO-RAY® INFRA-BLACK®

(GRAIH, GRAIHL, GRAIHL-D, GRAIH-D)


May not be installed in combustible surroundings.

Non-combustibles: 25 mm above and 102 mm below. Must be installed in a pass-through area. Units with remote switches may be installed 76 mm from a non-combustible back wall and flush to an overshef. Maximum 254 mm setback from the front of an overshef.

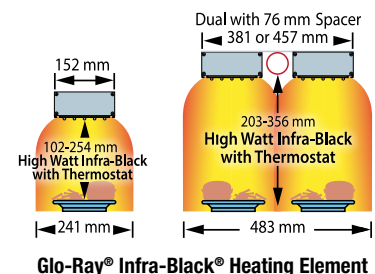

* Recommended single unit application without base heat, based on ideal conditions. Based on a 610 mm Strip Heater. Individual applications may vary, consult factory.

Mounting Arrangements

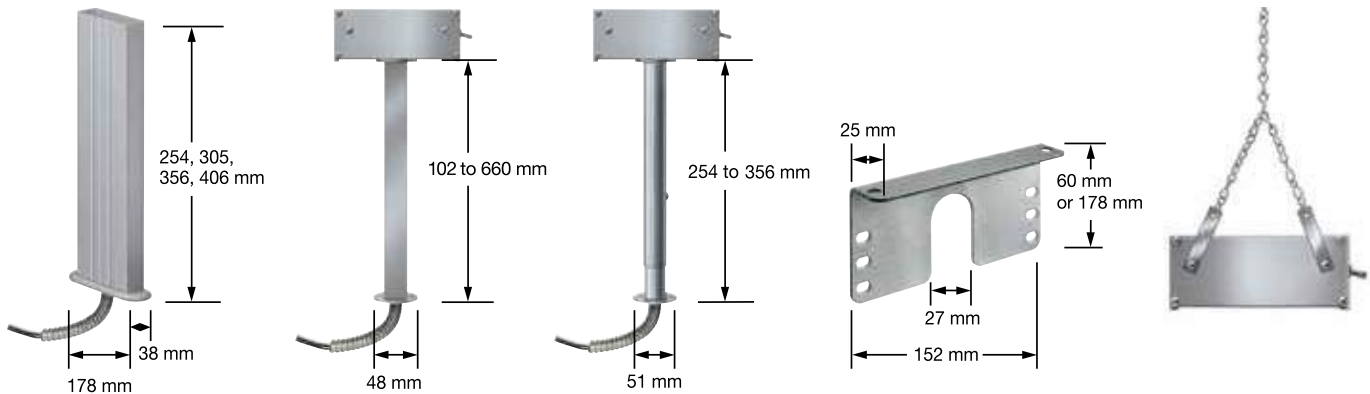

PERMANENT - FOR HARD WIRED INSTALLATION

Designer Non-Adjustable Stands

(GR2A series only)
Sturdy stands conceal all hook-up wiring. Available in *Designer* colors.

Non-Adjustable Tubular Stands

Sturdy stands conceal all hook-up wiring. Available in *Designer* Colors. Duals require two pair. Specify bottom power location.

Adjustable Tubular Stands

Sturdy tubular stands conceal all hook-up wiring. Duals require two pair (not available on Ultra-Glo® models). Specify bottom power location.


Angle brackets

Special adjustable angle brackets fit 152 or 229 mm housings for mounting Glo-Ray under a shelf. Provides 25-51 mm space or 25-152 mm space between Glo-Ray and overself. Duals require two pair. (standard on Ultra-Glo models).

Chain Suspension

Chains attach to tabs provided with warmers and are available in various lengths to suit the location (not available on Ultra-Glo models).

Strip Heaters

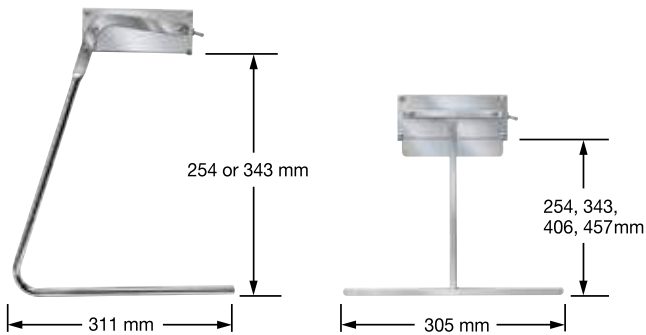

PORTABLE

C-Leg Stands

Attractive chrome plated legs allow easy relocation of the warmer. For models 1829 mm or less in width (not available on Ultra-Glo models).

T-Leg Stands

Provide rigid stability and allow for more pass-through area below unit. For models 1829 mm or less in width (not available on Ultra-Glo models).

STATIONARY

Chain Hook

Chains attach to tabs provided with warmers. 152 mm chain with S-Hooks for units.

Remote Control Enclosures (RMB)

Hatco Remote Control Enclosures (RMB) are built with toggle or infinite switches, indicator lights and wiring, ready for installation when purchased with Glo-Ray® Strip Heaters.

- Built for toggle or infinite switches, indicator lights and wiring
- Threaded rubber boot for toggle switch is Standard
- One RMB per Strip Heater (except RMB2 units)



RMB-14
with infinite
controls



RMB-3 with
toggle switch and
indicator light



RMB-7 with toggle switch
and infinite control



RMB-7 with toggle switches and
optional *Designer Hunter Green*

REMOTE CONTROL ENCLOSURES (RMB)

Model	Description	Width	List Price	
			Non-CE	CE *
RMB-3	1 toggle switch	140 mm	\$169	\$182
	2 toggle switches	140 mm	191	200
	1 toggle switch, 1 indicator light	140 mm	191	200
	1 infinite switch	140 mm	191	239
RMB-7	3 toggle switches	229 mm	\$236	\$268
	4 toggle switches	229 mm	277	–
	2 toggle switches, 2 indicator lights	229 mm	253	266
	1 toggle switch, 1 infinite switch	229 mm	233	286
	1 toggle switch, 1 infinite switch 1 indicator light	229 mm	256	303
	2 infinite switches	229 mm	256	361
	1 infinite switch, 1 indicator light	229 mm	229	278
	4 toggle switches	356 mm	–	\$289
RMB-14	5 toggle switches	356 mm	350	–
	6 toggle switches	356 mm	412	–
	3 toggle switches, 3 indicator lights	356 mm	–	326
	2 toggle switches, 2 infinite switches	356 mm	362	426
	1 toggle switch, 2 infinite switches	356 mm	317	421
	4 infinite switches	356 mm	407	588
	2 infinite switches, 2 indicator lights	356 mm	327	417
	4 infinite switches, 1 toggle switch	406 mm	439	–
RMB2-1R	1 toggle, 1 infinite, 1 relay, 1 indicator	280 mm	\$873	–

* CE models require any remote switches be contained in a Remote Control Enclosure (RMB).

All Models Feature:

Voltage: 220 or 240, single phase.

Ship Weight: 1-3 kg depending on components.

Max. Allowable Amperage per Switch: Toggle: 15.0

Infinite: 12.2

RMB2-1R: 16 or 20

Dimensions (not including switches): 140, 229, 356 or 406 W x 76 D x 64 H mm.

RMB2-1R: 280 W x 115 D x 140 H mm.

RMB2-1R Cutout Dimensions: 258 W x 121 H mm.

Toggle Switch: Max. 15 Amps
Infinite Switch: Max. 12.2 Amps

Remote Control Enclosures (RMB):
When used, no more than one RMB per
Strip heater and no more than one Strip
Heater per RMB (except RMB2 units).

Need help choosing the correct RMB?
"Choose Remote Box (RMB)" can be found on:
www.hatcocorp.com
under "Resources"

OPTIONS (available at time of purchase only)

Designer Colors (not available for RMB2-1R) – Non-standard colors are non-returnable – Clear Anodized Standard

RMB-COLOR	Remote Control Enclosure Housing in Designer Color						\$46
	RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	
	BLACK	Black	WHITE	White Granite	GREEN	Hunter Green	
						COPPER	Antique Copper

Gloss Finishes (not available for RMB2-1R) – Non-standard colors are non-returnable – Clear Anodized Standard

RMB-GLOSS	Remote Control Enclosure Housing in Gloss Finish			\$66
	RRED	Radiant Red	GGRAY	
	GGOLD	Gleaming Gold	BBLUE	Brilliant Blue
			BBLACK	Bold Black

COLORS AND FINISHES – INSIDE BACK COVER

Fry Stations

*Supermarkets & Delis
Restaurants & Cafés • Clubs & Bars*



GRFF in optional Brilliant Blue Gloss finish and **UGFF** in optional Glossy Gray Gloss finish *pg. 76*



GRFFL with optional 229 mm display sign holder (sign not included) and *Designer Warm Red* color and accessory food pan *pg. 76*



GRFHS-PT26 with accessory fry box ribbon *pg. 78*



GRFHS-PT26 with accessory 8-pleat hardcoated fry box ribbon (scoop not included) *pg. 78*



GRFHS-PTT21 *pg. 78*



GRFSCL-18 with swing-away post mount, cord with plug and accessory food pan *pg. 78*

Portable Foodwarmers

Opt for the versatility of Hatco's Glo-Ray® and Ultra-Glo® Portable Foodwarmers. With heat from above, below or both, these foodwarmers offer design flexibility without sacrificing food product quality. Ideal for use next to fry stations, drive-through windows and service areas that require frequent and easy access.

- Portable – ready to plug in and use
- Versatile – available in many sizes, styles and heat sources to fit your needs
- Flexible – both top and bottom heat available
- Available with incandescent bulbs containing special protective coating to guard against food contamination
- Ceramic heating elements provide more distance between the heat source and the holding pan (UGFF series only)
- Toggle switch is standard; infinite switch optional on GRFF series
- All base heat units (GR-B, GRFFB and UGFFB) have a preset automatic thermostat to maintain consistent temperatures



GR-B Heated Base with accessory sheet pan

GRFFB with optional infinite switch and accessory food pans



UGFFL in optional Radiant Red Gloss finish with accessory fry ribbon and food pan



GLO-RAY® PORTABLE FOODWARMERS

Model *	Dimensions W x D x H	Watts		Ship Weight	List Price
		220V	240V		
GR-B	324 x 559 x 57 mm	210	250	7 kg	\$ 692
GRFF	314 x 610 x 400 mm	500	500	7 kg	684
GRFFL	314 x 610 x 400 mm	600	620	7 kg	876
GRFFB [‡]	324 x 610 x 406-508 mm	710	750	13 kg	1118
GRFFBL [‡]	324 x 610 x 406-508 mm	810	870	14 kg	1284

* Available with CE Mark, add \$15.

[‡] Standard clearance is 356 mm. Specify 305 or 406 mm if required.

All Portable Foodwarmers Feature:

Models Shipped With: 1829 mm cord and plug.

Cord Location: GR-B, GRFFB, GRFFBL: Back, lower middle.

GRFF, GRFFL: Back, upper middle.

OPTIONS AND ACCESSORIES – PAGE 77

ULTRA-GLO® PORTABLE FOODWARMERS WITH CERAMIC ELEMENTS

Model *	Dimensions W x D x H	Watts		Ship Weight	List Price
		220V	240V		
UGFF	314 x 565 x 479 mm	630	750	7 kg	\$ 854
UGFFL	314 x 565 x 479 mm	730	870	8 kg	1051
UGFFB	324 x 572 x 559 mm	840	1000	12 kg	1281
UGFFBL	324 x 572 x 559 mm	940	1120	13 kg	1483

* Available with CE Mark, add \$15.

All Portable Foodwarmers with Ceramic Elements Feature:

Models Shipped With: 1829 mm cord and plug.

Cord Location: UGFF, UGFFL: Back, upper middle.

UGFFB, UGFFBL: Back, lower middle.

OPTIONS AND ACCESSORIES – PAGE 77

GR = Glo-Ray
UG = Ultra-Glo
French Fry

xx F F B L
L = Incandescent Light
No Character = No Light
B = Base Heat
No Character = No Base Heat



UGFFB with accessory food pan (perforated pans not available)

OPTIONS (available at time of purchase only)

Designer colors (one color per unit, heated base is not powdercoated, not available for GR-B models)

Non-standard colors are non-returnable – Clear Anodized standard –

RED	Warm Red	\$153
BLACK	Black	153
GRAY	Gray Granite	153
WHITE	White Granite	153
NAVY	Navy Blue	153
GREEN	Hunter Green	153
COPPER	Antique Copper	153

Gloss finishes (one color per unit, heated base is not painted, not available for GR-B models)

Non-standard colors are non-returnable –

RRED	Radiant Red	\$212
GGOLD	Gleaming Gold	212
GGRAY	Glossy Gray	212
BBLUE	Brilliant Blue	212
BBLACK	Bold Black	212

Clearance (from bottom of Glo-Ray to top of heated surface – GRFFB, GRFFBL only – 356 mm standard)

305 mm		No Charge
406 mm		No Charge
SIGN HOLD	Sign Holder for GRFFL Model with Back Toggle only (requires 229 W x 140 H x 2 D mm sign, which is not included and adds 76 mm to height of unit)	\$48
INF	Infinite Control (not available on models GR-B, UGFF, UGFFL, UGFFB or UGFFBL)	47

ACCESSORIES (available for purchase at any time)

5PLTBOX	Five-Pleat Hardcoated French Fry Box Ribbon – 489 W x 235 D x 51 H mm	\$234
8PLTBAG	Eight-Pleat Hardcoated French Fry Bag Ribbon – 489 W x 235 D x 51 H mm	234

Chef LED 230V adjustable bulb – bulbs must be rotated down – see page 45 for more information – excludes any model without existing bulbs –

each \$129

CLED-2700-230 Similar to warm Incandescent light **CLED-3000-230** Similar to warm Halogen light **CLED-4000-230** Similar to cool Fluorescent light

FRY RIBBONS – PAGE 79

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER



Accessory Chef LED Bulb

Glo-Ray® Fry Stations

Hatco offers convenient Glo-Ray® Fry Stations that can be placed where they are most needed – next to a fryer! Glo-Ray heat technology offers the ability to keep fried foods at optimum temperatures, ready to serve, without cooking or drying them out.

- Various hardcoated fry ribbons stage boxed or bagged products for quick-service areas
- Thermostatically-controlled heated base maintains uniform holding temperatures from below (GRFHS series)
- Accessory hardcoated fry ribbons absorb more radiant heat than stainless steel and can be up to 8° to 11°C hotter (GRFHS series)
- Portable models including pass-through style (GRFHS series)

- Sectional divider permits holding of multiple products simultaneously (GRFHS series)
- GRFHS models have ceramic elements and slotted holding bin to prevent soggy product
- Fry Station Warmers (GRFSC, GRFS series) feature a built-in top heat source and a swing-away post mount
- GRFSC series available with ceramic heating element, while the GRFS series has a metal sheathed element
- GRFS series has power toggle switch, cord and plug, plus optional infinite control

GRFHS-21 with optional right-hand cutout for fry basket and accessory fry ribbon (left-hand cutout also available)



GRFHS-PTT21



GRFHS-16



GRFSC-18
Swing-away post mount

FRY HOLDING STATIONS

Model #	No. of Bulbs	Dimensions W x D x H	Watts		Ship Weight	List Price
			220V-230V	230V-240V		
GRFHS-16*	2	416 x 559 x 564 mm	1057-1155	1019-1110	23 kg	\$3448
GRFHS-21*	2	543 x 724 x 578 mm	1218-1332	1102-1200	29 kg	3801
GRFHS-26*	2	672 x 595 x 578 mm	1243-1359	1128-1229	30 kg	3891
GRFHS-PT16*	2	549 x 591 x 625 mm	1057-1155	1019-1110	27 kg	3448
GRFHS-PT26*	2	759 x 570 x 625 mm	1233-1347	1347-1468	29 kg	3891
GRFHS-PT26*	2	759 x 570 x 625 mm	1233-1347	1347-1468	29 kg	4034
GRFHS-PTT21*	2	578 x 965 x 572 mm	1486-1624	1624-1768	45 kg	3957

* Available with CE Mark, at no added charge.

* Add 43 mm to width if ordering Scoop Holder.

▲ Scoop Holder standard.

■ Includes a built-in 152 mm deep heated food holding base (102 mm is standard on all other models).

All Fry Holding Station Models Feature:

Models Shipped with: One slotted holding bin and one sectional divider.

Cord Location: GRFHS-16, -21, -26, -PT26: Back side, lower right corner.

GRFHS-PTT21: Lower right-hand side.

FRY STATION WARMERS

Model #	No. of Bulbs	Dimensions W x D x H	Watts		Ship Weight	List Price
			220V	240V		
GRFSC-18 [‡]	—	152 x 457 x 489-572 mm	630	750	5 kg	\$742
GRFSL-18 [‡]	2	229 x 457 x 489-572 mm	730	870	6 kg	892
GRFSCR-18 [†]	—	152 x 457 x 489-572 mm	630	750	5 kg	743
GRFSLR-18 [†]	2	229 x 457 x 489-572 mm	730	870	6 kg	892
GRFS-24 [‡]	—	152 x 610 x 318-394 mm	500	500	5 kg	605
GRFSL-24 [‡]	2	229 x 610 x 318-394 mm	592	608	6 kg	765
GRFSR-24 [†]	—	152 x 610 x 318-394 mm	500	500	5 kg	605
GRFSLR-24 [†]	2	229 x 610 x 318-394 mm	600	620	6 kg	765

* Available with CE Mark, add \$15.

[‡] Specify clearance of 305, 425, 457 (standard) or 508 mm when ordering.

[†] Fry Station Warmer without cord and plug. Supply wires through mounting post.

[‡] Specify clearance of 254, 279, 305 or 330 (standard) mm when ordering.

All Fry Station Warmer Models Feature:


Toggle Switch Location: Ceramic Heating Element Models: Back of unit.

Metal Sheathed Heating Element Models: Front of unit.

Cord Location: GRFSC-18 and GRFSL-18: Back, right-hand side.

GRFS-24 and GRFSL-24: Back, upper middle.

OPTIONS AND ACCESSORIES – PAGE 79



GRFS, GRFSL, GRFSC, GRFSL-18 with swing-away post mount and cord with plug.

GRFHS-PTxx

Glo-Ray _____ Width (inches)

Fry Holding _____ No Characters = Bin

Station _____ PT= Pass-Through




PTT = Pass-Through Tunnel

GRFSLR-xx

Glo-Ray _____ Depth of Unit (inches)

Fry Station _____ UL Recognized

Ceramic Heating Element _____ Incandescent Light

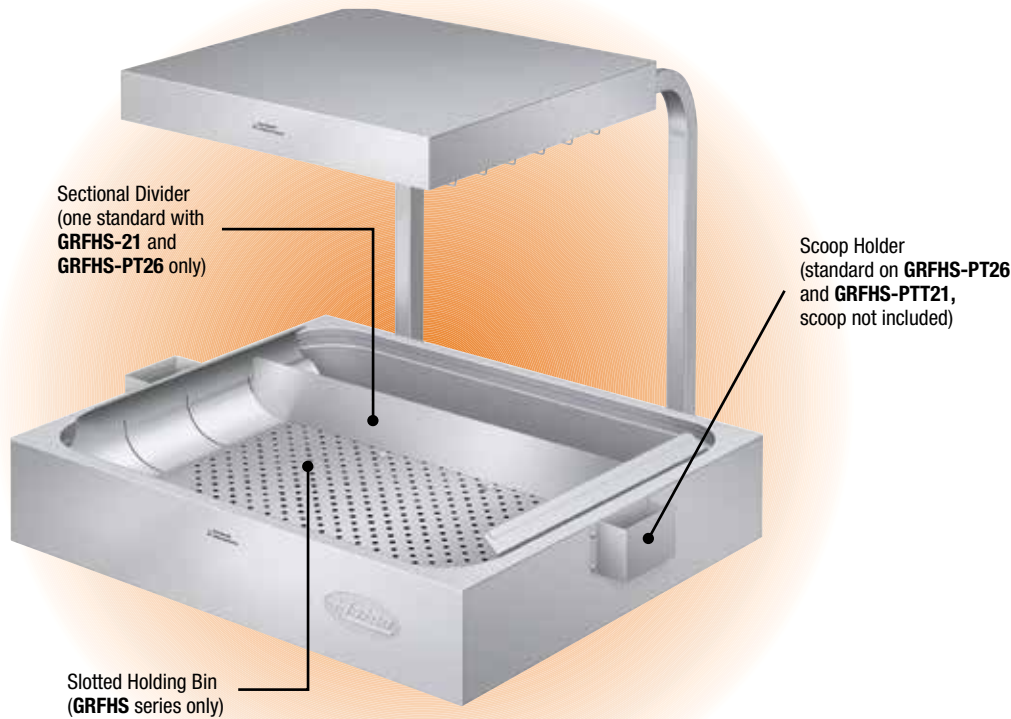**OPTIONS** (available at time of purchase only)

FHS-CUT	Right- or Left-Hand Cutout for Fry Basket – must specify side at time of order – Adds 43 mm to width of unit (GRFHS-16, -21, -26 models only)	No Charge
INF	Infinite Control (metal sheathed GRFS models only)	\$48

ACCESSORIES (available for purchase at any time)

FHS4BOX	Four-Pleat Hardcoated Fry Box Ribbon (GRFHS-16 & -26) – 273 W x 127 D x 45 H mm	\$ 90
FHS5BAG	Five-Pleat Hardcoated Fry Bag Ribbon (GRFHS-16 & -26) – 286 W x 127 D x 48 H mm	90
FHS5BOX	Five-Pleat Hardcoated Fry Box Ribbon (GRFHS-21) – 445 W x 127 D x 48 H mm	146
FHS6BAG	Six-Pleat Hardcoated Fry Bag Ribbon (GRFHS-21, -PT26, & -PTT21) – 349 W x 127 D x 51 H mm	98
FHS6BB	Six-Pleat Hardcoated Fry Box/Bag Ribbon (GRFHS-21, -PT26, & -PTT21) – 438 W x 127 D x 44 H	146
FHS7BAG	Seven-Pleat Hardcoated Fry Bag Ribbon (GRFHS-21) – 454 W x 127 D x 48 H mm	146
PTT16-10BAG	Ten-Pleat Hardcoated Hashbrown Ribbon – (GRFHS-PT26 & -PTT21) – 381 W x 98 D x 44 H	137
5BH	127 mm Side-by-Side Bag Holder (GRFHS-21 models)	60
FHS-SH	Scoop Holder – adds 32 mm to width of unit – One standard on GRFHS-PT26 & -PTT21 models, not available for GRFHS-22	60
FHSDIV1	Sectional Divider – 407 W x 83 H mm – GRFHS-16, -26 models	\$35

Chef LED 230V adjustable bulb – bulbs must be rotated down – see page 45 for more information – each **\$129**

CLED-2700-230 Similar to warm Incandescent **CLED-3000-230** Similar to warm Halogen light

CLED-4000-230 Similar to cool Fluorescent light

FOOD PANS AND TRIVETS – PAGE 189

Accessory Chef LED Bulb

Multi-Product Warming Stations

Hatco's redesigned Multi-Product Warming Station safely holds hot fried foods at optimum serving temperatures in kitchen work areas. The unit is designed for maximum durability and performance with minimum maintenance.

- New removable left/right side panel
- New wider, deeper side openings
- Easy access to food product
- Coated shatter-resistant incandescent lights enhance brilliant product display while safeguarding food from bulb breakage

ENDLESS POSSIBILITIES OF CONFIGURATIONS

Incremental spacing between portable dividers is 130 mm

- Thermostatically controlled base heat assures safe serving temperatures
- Six overhead ceramic heating elements are adjusted by two separate electronic infinite controls – one for the rear elements and one for the front elements
- All stainless steel construction
- Master On/Off rocker switch



MPWS-36 with accessory angled risers, fry pan and trivet (plastic food pans not available)



Shown with accessory fry bin insert and standard detachable side panel on right side



Shown with optional fry pans, accessory fry ribbon on angled riser and accessory scoop holder



Shown with optional fry pans, and accessory angled riser and scoop holder (plastic food pans not available)



Shown with accessory fry ribbons on angled risers, fry pan and scoop holder (plastic food pans not available)

MULTI-PRODUCT WARMING STATIONS

Model*	No. of Bulbs	Dimensions W x D x H	Watts 230V	Ship Weight	List Price
MPWS-36	4	950 x 630 x 832 mm	3075	69 kg	\$5497
MPWS-45	4	1153 x 630 x 832 mm	3108	77 kg	6136

* Not available with CE mark.

All Multi-Product Warming Stations Feature:

Models Shipped With: 102 mm adjustable legs, left/right side panel.

Cord Location: Back, upper left corner.


OPTION CAPACITIES

Model	Fry Pan with Trivet	Angled Risers
MPWS-36	1	3
	2	1
	0	5
MPWS-45	1	4
	2	2
	0	6

ACCESSORIES (available for purchase at any time)

FHS4BOX	Four-Pleat Hardcoated Fry Box Ribbon – 273 W x 127 D x 45 H mm	\$ 90
FHS5BAG	Five-Pleat Hardcoated Fry Bag Ribbon – 299 W x 127 D x 48 H mm	90
5BH	127 mm Side-by-Side Bag Holder	60
FHS-SH	Scoop Holder	60
MPWS-RISER	Angled Riser	120
MPWS-PT	Fry Pan and Trivet	525
MPWS36BIN	Full Fry Bin Insert for MPWS-36 unit only (includes Drip Tray, Perforated Insert and 3 Dividers)	each \$498
MPWS45BIN	Full Fry Bin Insert for MPWS-45 unit only (includes Drip Tray, Perforated Insert and 4 Dividers)	each 533
Chef LED 230V adjustable bulb – bulbs must be rotated down – see page 45 for more information –		each \$129
CLED-2700-230 Similar to warm Incandescent light		
CLED-3000-230 Similar to warm Halogen light		
CLED-4000-230 Similar to cool Fluorescent light		

FOOD PANS AND TRIVETS – PAGE 189

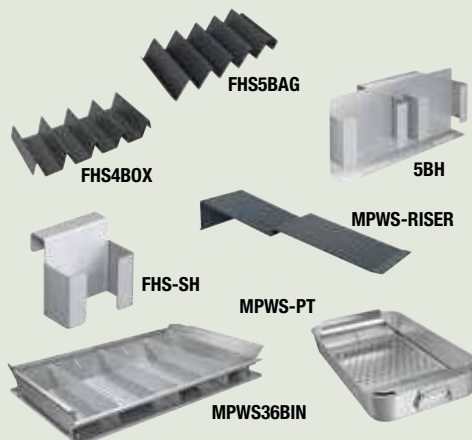

MPWS - x x

Multi-Product ——— Width (inches)
Warming Station ———

Carving Stations

*Supermarkets & Delis
Restaurants & Cafés • Clubs & Bars*



DCSB400-1CM pg. 82



DCSB400-R24-1 with optional Bermuda Sand base and optional Bright Brass post and shade pg. 82



DCSB400-R24-1 with optional Gray Granite base and standard Bright Nickel post and shade. Shown with a **GR2S-36** pg. 82



DCSB400-R24-1 with optional Gray Granite base and standard Bright Nickel post and shade pg. 82



GRCSCS-24 with accessory left-hand sneeze guard, drip pan and cutting board pg. 83



ACCESSORIES (CSCL-BOARD shown) pg. 83

Decorative Carving Stations

Decorative Carving Stations provide proper food serving temperatures by combining the Hatco Decorative Heat Lamp with the simulated stone heated base to create an attractive carving display. Perfect for chef stations in restaurants, hotels, country clubs, casinos and for any catered event.

- Available as post mount, permanent counter mount or freestanding with a rounded or rectangular heated simulated stone base (DCS400-1, -1CM do not have bases)
- The patented telescoping heated Decorative Lamp has a 30° shade pivot
- Heated simulated stone bases are made of foodsafe materials
- Heated base is controlled by an adjustable thermostat and power switch
- Units come with matching cutting board (except DCS400-1, -1CM), keeping juices contained and tablecloths clean
- DCS400-1 has a 18 kg weighted base, perfect for buffet use
- Sneeze guard is removable for easy cleaning (DCSB400-R24-1, -2420-1, -3624-2 models only)
- Models with simulated stone are Swanstone®

DCS400-1CM
with optional
Bright Brass
post and optional
Bermuda Sand
trim ring



DCSB400-R24-1
with optional
Bermuda Sand
base and
standard Bright
Nickel post
and shade



DCSB400-3624-2
with standard
Night Sky base
and standard
Bright Nickel
posts and shades



DECORATIVE CARVING STATIONS

Model	No. of Lamps	Width	Heated Base Surface Area (W x D)	Watts	Ship Weight	List Price*
DCS400-1	1	203 mm	—	210-250	15 kg	\$1736
DCS400-1CM	1	156 mm	—	210-250	8 kg	1701
DCSB400-R24-1	1	660 mm	610 mm diameter	530-631	35 kg	4259
DCSB400-2420-1	1	610 mm	610 x 508 mm	667-794	37 kg	4308
DCSB400-3624-2	2	914 mm	914 x 610 mm	1152-1371	58 kg	6187

* Available with CE Mark, add \$100.

All Decorative Carving Station Models Feature:

Models Shipped with: DCS400-1, -1CM One clear coated bulb. DCS400-1 includes black base.

DCSB400-R24-1, -2420-1 One clear coated bulb, base heat, glass sneeze guard and cutting board.

DCSB400-3624-2 Two clear coated bulbs, base heat, glass sneeze guard and cutting board.

Telescoping Clearance: DCS400-1, -1CM (bottom of shade to counter) 406 - 711 mm.

DCSB400-R24-1, -2420-1, -3624-2 (bottom of shade to top of cutting board) 356 - 660 mm.

Cord Location: DCS400-1 Base of unit, server side center.

DCS400-1CM: Under counter.

DCSB400-R24-1, -2420-1, -3624-2 Base of unit, server side on left.

DCS400-1
with optional
Bright Brass
post and shade
and black base



OPTIONS (available at time of purchase only)

Shade and Post(s) in Plated Finish, no additional charge – Non-Standard colors are non-returnable – Bright Nickel standard –

BBRASS	Bright Brass	No Charge
BCOPPER	Bright Copper	No Charge
ABRASS	Antique Brass	No Charge
ABRONZE	Antique Bronze	No Charge

Base and Cutting Board (except DCS400-1, -1CM) in simulated stone – Non-Standard colors are non-returnable –

Night Sky Standard –

GGRAN	Gray Granite	No Charge
BSAND	Bermuda Sand	No Charge

Trim Ring (DCS400-1CM only) in simulated stone – Non-Standard colors are non-returnable – Night Sky standard –

GGRAN	Gray Granite	No Charge
BSAND	Bermuda Sand	No Charge



Close-up of **Trim Ring**
in Standard Night Sky
(Unit shown in Optional
Plated Antique Bronze finish)

DCSBxxx-xxxx-xCM

Decorative Carving Station
B = Heated Base
No Character = No Base Heat
Shade Style Number
Width of Heated Base (inches)
(R = Round Heated Base)
No Character = Freestanding
CM = Countertop Mount
Quantity Overhead Heat Lamps
Depth of Heated Base (inches)
(Diameter for Round Heated Base)

Glo-Ray® Carving Stations

An excellent addition to extend food holding times during serving periods is the Glo-Ray Carving Station. Create a complete serving station for buffets by adding it to Hatco's Flav-R-Savor® Holding Cabinet.

- Overhead ceramic heating elements project high intensity radiant heat over entire target area
- Adjustable clearance of 445 to 570 mm
- Portable – includes a 1829 mm cord and plug
- Shatter-resistant incandescent lights illuminate holding area
- Drip pan and cutting board available
- GRCSCLH has base heat



GRCSCSCL-24 with accessory left-hand sneeze guard, drip pan and cutting board



GRCSCSLH-24 with accessory left-hand sneeze guard, drip pan and cutting board



GRCSCSLH-24 controls

CARVING STATIONS WITH CERAMIC ELEMENTS

Model	No. of Bulbs	Dimensions W x D x H*	Watts		Ship Weight	List Price†
			220V	240V		
GRCSCSCL-24	4	660 x 711 x 572-724 mm	1040	990	26 kg	\$3985
GRCSCSLH-24	4	660 x 711 x 572-724 mm	1316	1314	26 kg	4497

* Width includes accessory left-hand sneeze guard.

† Available with CE Mark, add \$15.

All Carving Station Models Feature:

Models Shipped With: Right-hand sneeze guard.

Cord Location: Back side on base.

ACCESSORIES (available for purchase at any time)

CSCLB/PACC	Left-Hand Sneeze Guard Kit – 1 kg	\$289
CSCL-PAN	Stainless Steel Custom Drip Pan – 508 x 679 x 25 mm – 4 kg	298
CSCL-BOARD	Approved foodsafe Cutting Board – 457 x 610 x 44 mm – 9 kg	281
Chef LED 230V adjustable bulb – bulbs must be rotated down – see page 45 for more information –		each \$129
CLED-2700-230	Similar to warm Incandescent	
CLED-3000-230	Similar to warm Halogen light	
CLED-4000-230	Similar to cool Fluorescent light	



CSCLB/PACC




CSCL-PAN



CSCL-BOARD



Accessory Chef LED Bulb



Portables

*Cafeterias • Buffets • Convenience Stores
Supermarkets & Delis • Restaurants & Cafés
Clubs & Bars • Catering • Concessions*



LW-2 in Standard *Designer* Gray Granite with Accessory food pans *pg. 85*



GRSR-17 with optional *Designer* Navy Blue color and Accessory food pan *pg. 86*




GRS-72-1 with Accessory food pans *pg. 87*



GR2S-30 with optional *Designer* Hunter Green inset panels and Accessory pizza pans *pg. 89*



GRSSR with optional 76 or 127 mm risers in standard Night Sky simulated stone *pg. 90*

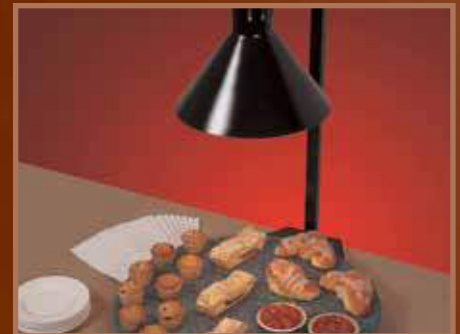

GRSSR20-DL77516 with standard Night Sky simulated stone heated base *pg. 90*



GRSS-3618 in optional Bermuda Sand simulated stone *pg. 92*



HBG-2418 in new optional white glass *pg. 93*



GRBW-30 with optional enclosures *pg.95*

Portable Lamp Warmer

The Hatco Portable Lamp Warmer has a specially-designed stand that keeps food holding pans above the countertop and provides insulation to extend holding times.

- Features two vented lamps with heavy-duty sockets
- Adjustable stand from 619 to 772 mm in height
- Cord and plug with in-line power switch

- Gray Granite is standard color with optional *Designer Colors* available: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper (non-standard colors are non-returnable)
- Holds food pans, wire trivets and fry ribbons

LW-2 in optional *Designer Black* with Accessory food pans



PORTABLE LAMP WARMER

Model	No. of Bulbs	Dimensions W x D x H	Watts		Ship Weight	List Price †
			220-230V	230-240V		
LW-2	2	314 x 548 x 619-772 mm	457-500	500-544	8 kg	\$880

† Available with CE Mark, no added charge.

All Portable Lamp Warmer Models Feature:

Voltage: 220 or 240, single phase.

Bulbs: Two 250 watt *uncoated* clear bulbs.

Cord Location: 1829 mm cord and plug located on back of adjustable stand near top.

Lamp Distance: 267 x 419 mm space from bottom of lamp to top of base.

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable –

Gray Granite standard –

RED	Warm Red	No Charge
BLACK	Black	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge

ACCESSORIES (available for purchase at any time)

WHITE-CTD-240	250 Watt Clear Bulb, 240V, Coated (unit accommodates 2 bulbs)	each \$78
---------------	---	-----------

FRY RIBBONS – PAGE 79

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER

LW - x
Lamp Warmer — Quantity of
Heat Lamps

Glo-Ray® Portable Round Heated Shelves

The contemporary-styled Round Heated Shelf keeps hot food at serving temperatures. Ideal when used for wrapped product or for use behind a sneeze guard with unwrapped food like pizza, biscuits, muffins and cookies.

- Unit is designed for countertop or built-in use – see cutout dimensions below
- Uniform heat distribution with blanket-type element
- Thermostatically-controlled heated base
- Available in three sizes to hold standard 381, 432 or 483 mm diameter pans
- Optional Stainless Steel trim



GRSR-17 in optional Designer Navy Blue with Accessory food pan



GRSR-19 in optional Designer Hunter Green with Accessory pizza pan

GLO-RAY PORTABLE ROUND HEATED SHELVES

Model	Dimensions		Watts		Ship Weight	List Price*
	Dia. x H	Max. Pan Size	220V	240V		
GRSR-15	425 x 98 mm	381 mm Dia.	210	250	5 kg	\$1026
GRSR-17	476 x 98 mm	432 mm Dia.	273	325	6 kg	1079
GRSR-19	527 x 98 mm	483 mm Dia.	336	400	8 kg	1142

* Available with CE Mark, no added charge.

All Glo-Ray Portable Round Heated Shelf Models Feature:

Voltage: 220 or 240, single phase.

Cord Location: 1829 mm cord and plug located underneath.

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Black standard –


RED	Warm Red	No Charge
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge
SS SIDE	Stainless Steel Side	No Charge

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER

PORTABLE ROUND HEATED SHELVES COUNTERTOP CUTOUT DIMENSIONS (For Built-In Applications)

Model	Minimum Diameter	Maximum Diameter	Below Counter
GRSR-15	410 mm	413 mm	137 mm
GRSR-17	460 mm	464 mm	137 mm
GRSR-19	511 mm	514 mm	137 mm



Glo-Ray® Portable Heated Shelves

Whether you need a heated workspace or extra base heat in a pass-through or buffet area, Hatco's full line of Glo-Ray® Heated Shelf options can help you. Using a blanket heating element for an even temperature, the thermostatically-controlled base safely extends the holding time of your food.

Flexibility, style and quality mark these workhorses of the buffet. Available in a variety of widths and depths to meet your specific needs.

- Uniform heat distribution with a blanket-type element
- Built-in adjustable thermostat controls surface temperature
- Extruded aluminum base with Stainless Steel top – optional Hardcoat Aluminum surface
- Accessory 102 mm legs – Standard on 914 mm and wider models
- Accessory slant leg kit and pan rail available

- Model widths from 457 to 1829 mm
- Model depths: 152, 197, 248, 305, 349, 394, 400, 445, 495, 546, 597, 648 mm
- Optional *Designer Colors*: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper. Non-standard colors are non-returnable

continued on next page...



GRS-60-I

GLO-RAY PORTABLE HEATED SHELVES

Model	Dimensions	Watts		Ship Weight	List Price [‡]
	W x H	220V	240V		
495 mm depth I – Standard 495 mm Depth accommodates 305 x 508 mm steam table pans					
GRS-18-I	457 x 59 mm	229	272	7 kg	\$ 999
GRS-24-I	610 x 59 mm	320	381	9 kg	1091
GRS-30-I	762 x 59 mm	412	490	11 kg	1174
GRS-36-I	914 x 137 mm	503	599	13 kg	1255
GRS-42-I	1067 x 137 mm	549	653	15 kg	1415
GRS-48-I	1219 x 137 mm	640	762	16 kg	1474
GRS-54-I	1372 x 137 mm	732	871	19 kg	1586
GRS-60-I	1524 x 137 mm	823	980	20 kg	1643
GRS-66-I	1676 x 137 mm	915	1089	23 kg	1706
GRS-72-I	1829 x 137 mm	1006	1198	25 kg	1846

197 mm depth B

GRS-18-B	457 x 59 mm	91	109	5 kg	\$ 774
GRS-24-B	610 x 59 mm	114	136	5 kg	805
GRS-30-B	762 x 59 mm	137	163	5 kg	846
GRS-36-B	914 x 137 mm	160	191	6 kg	883
GRS-42-B	1067 x 137 mm	205	245	9 kg	969
GRS-48-B	1219 x 137 mm	228	272	9 kg	1013
GRS-54-B	1372 x 137 mm	251	299	9 kg	1032
GRS-60-B	1524 x 137 mm	274	327	10 kg	1082
GRS-66-B	1676 x 137 mm	297	354	12 kg	1098
GRS-72-B	1829 x 137 mm	320	381	11 kg	1148

305 mm depth D

GRS-18-D	457 x 59 mm	183	218	5 kg	\$ 832
GRS-24-D	610 x 59 mm	229	272	7 kg	891
GRS-30-D	762 x 59 mm	274	327	8 kg	945
GRS-36-D	914 x 137 mm	320	381	9 kg	991
GRS-42-D	1067 x 137 mm	412	490	10 kg	1100
GRS-48-D	1219 x 137 mm	457	544	12 kg	1159
GRS-54-D	1372 x 137 mm	503	599	14 kg	1206
GRS-60-D	1524 x 137 mm	548	653	15 kg	1256
GRS-66-D	1676 x 137 mm	594	708	16 kg	1309
GRS-72-D	1829 x 137 mm	640	762	17 kg	1359

* Available with CE Mark, no added charge.

All Glo-Ray Portable Heated Shelf Models Feature:

Voltage: 220 or 240, single phase.

Cord Location: 1829 mm cord and plug located on center of side with controls.

Pan Capacity 305 x 508 mm: GRS-18-I, -24-I = 1-pan

GRS-30-I, -36-I = 2-pan

GRS-42-I, -48-I = 3-pan

GRS-54-I, -60-I = 4-pan

GRS-66-I, -72-I = 5-pan

GLO-RAY PORTABLE HEATED SHELVES – continued next page

Model	Dimensions	Watts		Ship Weight	List
	W x H	220V	240V		Price [‡]
152 mm depth A					
GRS-18-A	457 x 59 mm	91	109	5 kg	\$ 749
GRS-24-A	610 x 59 mm	114	136	5 kg	773
GRS-30-A	762 x 59 mm	137	163	4 kg	805
GRS-36-A	914 x 137 mm	160	191	5 kg	832
GRS-42-A	1067 x 137 mm	205	245	7 kg	919
GRS-48-A	1219 x 137 mm	228	272	7 kg	945
GRS-54-A	1372 x 137 mm	251	299	8 kg	969
GRS-60-A	1524 x 137 mm	274	327	8 kg	989
GRS-66-A	1676 x 137 mm	297	354	9 kg	1061
GRS-72-A	1829 x 137 mm	320	381	10 kg	1077


248 mm depth C

GRS-18-C	457 x 59 mm	114	136	4 kg	\$1032
GRS-24-C	610 x 59 mm	160	191	6 kg	846
GRS-30-C	762 x 59 mm	206	245	6 kg	891
GRS-36-C	914 x 137 mm	252	299	7 kg	932
GRS-42-C	1067 x 137 mm	274	327	8 kg	1032
GRS-48-C	1219 x 137 mm	320	381	9 kg	1082
GRS-54-C	1372 x 137 mm	366	436	10 kg	1105
GRS-60-C	1524 x 137 mm	412	490	11 kg	1169
GRS-66-C	1676 x 137 mm	458	544	13 kg	1204
GRS-72-C	1829 x 137 mm	504	599	13 kg	1243

349 mm depth E

GRS-18-E	457 x 59 mm	183	218	6 kg	\$ 866
GRS-24-E	610 x 59 mm	229	272	6 kg	931
GRS-30-E	762 x 59 mm	274	327	8 kg	982
GRS-36-E	914 x 137 mm	320	381	10 kg	1045
GRS-42-E	1067 x 137 mm	412	490	12 kg	1159
GRS-48-E	1219 x 137 mm	457	544	13 kg	1219
GRS-54-E	1372 x 137 mm	502	599	14 kg	1280
GRS-60-E	1524 x 137 mm	548	653	16 kg	1366
GRS-66-E	1676 x 137 mm	594	708	17 kg	1385
GRS-72-E	1829 x 137 mm	640	762	18 kg	1454

* Available with CE Mark, no added charge.



Glo-Ray® Portable Heated Shelves

continued



GRS-30-I in optional *Designer* Black with Accessory food pans, shown below a **GRAH-36** Strip Heater in optional *Designer* Warm Red, infinite switch and Accessory C-leg stand

GLO-RAY PORTABLE HEATED SHELVES continued...

Model	Dimensions	Watts		Ship Weight	List Price ⁺
	W x H	220V	240V		
394 mm depth F					
GRS-18-F	457 x 59 mm	183	218	6 kg	\$ 905
GRS-24-F	610 x 59 mm	229	272	8 kg	958
GRS-30-F	762 x 59 mm	274	327	10 kg	1025
GRS-36-F	914 x 137 mm	320	381	11 kg	1082
GRS-42-F	1067 x 137 mm	412	490	12 kg	1209
GRS-48-F	1219 x 137 mm	457	544	15 kg	1271
GRS-54-F	1372 x 137 mm	503	599	17 kg	1347
GRS-60-F	1524 x 137 mm	548	653	18 kg	1410
GRS-66-F	1676 x 137 mm	594	708	19 kg	1463
GRS-72-F	1829 x 137 mm	640	762	21 kg	1549
445 mm depth H					
GRS-18-H	457 x 59 mm	206	245	7 kg	\$ 955
GRS-24-H	610 x 59 mm	274	327	8 kg	1041
GRS-30-H	762 x 59 mm	343	408	10 kg	1112
GRS-36-H	914 x 137 mm	412	490	12 kg	1206
GRS-42-H	1067 x 137 mm	480	572	15 kg	1338
GRS-48-H	1219 x 137 mm	549	653	16 kg	1423
GRS-54-H	1372 x 137 mm	618	735	18 kg	1501
GRS-60-H	1524 x 137 mm	686	817	20 kg	1579
GRS-66-H	1676 x 137 mm	755	898	22 kg	1602
GRS-72-H	1829 x 137 mm	823	980	23 kg	1736
597 mm depth K					
GRS-18-K	457 x 59 mm	297	354	10 kg	\$1134
GRS-24-K	610 x 59 mm	389	463	12 kg	1195
GRS-30-K	762 x 59 mm	480	572	15 kg	1285
GRS-36-K	914 x 137 mm	572	681	16 kg	1383
GRS-42-K	1067 x 137 mm	686	817	20 kg	1549
GRS-48-K	1219 x 137 mm	778	925	22 kg	1648
GRS-54-K	1372 x 137 mm	869	1034	24 kg	1743
GRS-60-K	1524 x 137 mm	961	1143	25 kg	1852
GRS-66-K	1676 x 137 mm	1052	1252	31 kg	1959
GRS-72-K	1829 x 137 mm	1144	1361	31 kg	2051

† Available with CE Mark, no added charge.

All Glo-Ray Portable Heated Shelf Models Feature:

Voltage: 220 or 240, single phase.

Cord Location: 1829 mm cord and plug located on center of side with controls.

OPTIONS AND ACCESSORIES – PAGE 89

GLO-RAY PORTABLE HEATED SHELVES

Model	Dimensions	Watts		Ship Weight	List Price [±]
	W x H	220V	240V		
400 depth G					
GRS-18-G	457 x 59 mm	206	245	8 kg	\$ 920
GRS-24-G	610 x 59 mm	274	327	8 kg	993
GRS-30-G	762 x 59 mm	343	408	10 kg	1061
GRS-36-G	914 x 137 mm	412	490	12 kg	1127
GRS-42-G	1067 x 137 mm	480	572	13 kg	1269
GRS-48-G	1219 x 137 mm	549	653	15 kg	1339
GRS-54-G	1372 x 137 mm	618	735	38 kg	1413
GRS-60-G	1524 x 137 mm	686	817	19 kg	1485
GRS-66-G	1676 x 137 mm	755	898	21 kg	1498
GRS-72-G	1829 x 137 mm	823	980	21 kg	1616
546 mm depth J					
GRS-18-J	457 x 59 mm	274	327	9 kg	\$1083
GRS-24-J	610 x 59 mm	343	408	11 kg	1141
GRS-30-J	762 x 59 mm	412	490	14 kg	1228
GRS-36-J	914 x 137 mm	480	572	15 kg	1313
GRS-42-J	1067 x 137 mm	618	735	18 kg	1482
GRS-48-J	1219 x 137 mm	686	817	20 kg	1560
GRS-54-J	1372 x 137 mm	755	898	22 kg	1664
GRS-60-J	1524 x 137 mm	823	980	24 kg	1744
GRS-66-J	1676 x 137 mm	892	1062	27 kg	1836
GRS-72-J	1829 x 137 mm	961	1143	29 kg	1953
648 depth L					
GRS-18-L	457 x 59 mm	320	381	10 kg	\$1187
GRS-24-L	610 x 59 mm	435	517	12 kg	1243
GRS-30-L	762 x 59 mm	549	653	15 kg	1342
GRS-36-L	914 x 137 mm	663	789	17 kg	1452
GRS-42-L	1067 x 137 mm	755	898	20 kg	1627
GRS-48-L	1219 x 137 mm	869	1034	23 kg	1737
GRS-54-L	1372 x 137 mm	984	1171	26 kg	1845
GRS-60-L	1524 x 137 mm	1098	1307	27 kg	1950
GRS-66-L	1676 x 137 mm	1212	1443	29 kg	2089
GRS-72-L	1829 x 137 mm	1327	1579	31 kg	2167

† Available with CE Mark, no added charge.

Glo-Ray® Designer Portable Heated Shelves

Using a blanket heating element for an even temperature, the thermostatically-controlled base safely extends the holding time of your food. Hatco's *Designer* Portable Heated Shelves can blend into any décor.

- Built-in adjustable thermostatic controls
- Model widths from 768 x 1988 mm
- Rounded edges and Hardcoat Aluminum surfaces offer a modern style for front-of-the-house applications

- Optional Dark Gray corner caps (Black standard) and *Designer* Color inset panels available
- 102 mm legs standard on 921 mm and wider models

GR2S-30 with optional *Designer* Hunter Green inset panels and Accessory pizza pans



GLO-RAY DESIGNER PORTABLE HEATED SHELVES

Model*	Dimensions W x D x H	Pan Capacity 324 x 527 mm pan	Voltage Single Phase	Watts	Ship Weight	List Price*
GR2S-24	768 x 686 x 101 mm	1	220, 240	350	17 kg	\$2289
GR2S-30	921 x 686 x 178 mm	2	220, 240	450	18 kg	2458
GR2S-36	1073 x 686 x 178 mm	2	220, 240	550	20 kg	2631
GR2S-42	1226 x 686 x 178 mm	3	220, 240	600	23 kg	2901
GR2S-48	1378 x 686 x 178 mm	3	220, 240	700	25 kg	3075
GR2S-54	1530 x 686 x 178 mm	4	220, 240	800	28 kg	3241
GR2S-60	1683 x 686 x 178 mm	4	220, 240	900	30 kg	3413
GR2S-66	1835 x 686 x 178 mm	5	220, 240	1000	34 kg	3582
GR2S-72	1988 x 686 x 178 mm	5	220, 240	1100	37 kg	3754


* When no color is specified, color inset panels and corner caps will be black.

* CE Mark not available.

All Glo-Ray Designer Portable Heated Shelf Models Feature:

Usable Heated Shelf Space: (Width of unit minus 162) x 552 D mm.

Cord Location: 1829 mm cord and plug located on center of bottom on control side.



OPTIONS (available at time of purchase only)

Designer Colors (top surface not painted) –

Non-standard colors are non-returnable – Clear Anodized standard –

RED	Warm Red	\$188
BLACK	Black	188
GRAY	Gray Granite	188
WHITE	White Granite	188
NAVY	Navy Blue	188
GREEN	Hunter Green	188
COPPER	Antique Copper	188

Designer Inset Panel colors (GR2S models) –

Non-standard colors are non-returnable – Black standard –

RED	Warm Red	No Charge
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge

Designer Corner Caps, GR2S models –

Non-standard colors are non-returnable – Black standard –

DKGRAY	Dark Gray Corner Caps	No Charge
--------	-----------------------	-----------

Hardcoat Aluminum surface in lieu of Stainless Steel on standard 495 mm deep GRS models only (please consult factory for pricing of other depths)

HC 18-42	GRS-18 through GRS-42	\$221
HC 48-42	GRS-48 through GRS-72	374
GRS-RECTH	Thermostat Guard (GRS models only)	No Charge




ACCESSORIES (available for purchase at any time)

GRS-LEGS	102 mm Adjustable Legs (GRS models only, standard on units GRS-36 and larger)	\$ 60
2SD-LEGS	102 mm adjustable Legs for GR2S-24 (standard on GR2S-30 and larger)	112
GRS-SLANT	Slant Leg Kit for models 305 mm deep or deeper (GRS models only)	30
Pan Rail for 495 mm deep GRS models only –		
2 RAIL	2-pan	\$194
3 RAIL	3-pan	210
4 RAIL	4-pan	391
5 RAIL	5-pan	405
THRUSHelf	Bolt and fender washer leg accessory kit for attaching one GRS unit to a wire rack shelf	\$14

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER



Glo-Ray® Portable Round Heated Simulated Stone Shelves

Hatco's Glo-Ray® Portable Round Heated Simulated Stone Shelves are made of foodsafe materials and come in three simulated stone colors. These unique warmers will safely hold food hot while blending in with your décor and are ideal for buffet lines or as hors d'oeuvres displays.

- Blanket-type element creates uniform heat across the entire simulated stone surface
- Features a lighted rocker switch and thermostatically-controlled heated base to help hold your food hot and delicious
- Optional 76 mm or 127 mm risers available in Stainless Steel (standard) or *Designer Colors*
- Models with simulated stone are Swanstone®

GRSSR-16 in standard Night Sky simulated stone with optional 76 mm Riser in optional *Designer Gray Granite*



GRSSR-20 in standard Night Sky simulated stone

GRSSR-18 in standard Night Sky simulated stone with optional 127 mm Riser in optional *Designer Warm Red*

GRSSR20-DL77516 in standard Night Sky simulated stone with standard Black base and lamp



GLO-RAY PORTABLE ROUND HEATED SIMULATED STONE SHELVES

Model	Dimensions Dia. x H	Watts		Ship Weight	List Price*
		220V-230V	230V-240V		
GRSSR-16	406 x 66 mm	190-220	220-250	6 kg	\$1294
GRSSR-18	457 x 66 mm	265-295	295-325	7 kg	1380
GRSSR-20	508 x 66 mm	330-370	370-400	8 kg	1466

GLO-RAY PORTABLE ROUND HEATED SIMULATED STONE SHELVES with DECORATIVE LAMP

Model	Dimensions W x D x H	Watts		Ship Weight	List Price*
		220V-230V	230V-240V		
GRSSR20-DL77516	508 x 572 x 914 mm	550-600	600-650	15 kg	\$2135

* Available with CE Mark, add \$20

All Glo-Ray Round Heated Simulated Stone Shelf Models With Decorative Lamp Feature:

Voltage: 220 or 240, single phase.



Bulb: One, 250 watt clear bulb, uncoated.

Temperature Range: 38°-93°C.

Cord Location: 1829 mm cord and plug located on back side on base.

Lamp Distance: 415 mm space from bottom of shade to base.

OPTIONS AND ACCESSORIES – PAGE 91

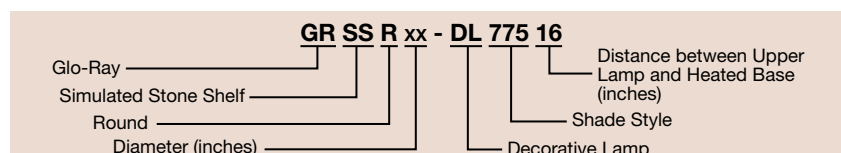



Two **GRSSR20-DL77516** units in optional Gray Granite simulated stone and standard *Designer* Black Base and Shade

OPTIONS *(available at time of purchase only)*

Designer Color Base (and Lamp for GRSSRxx-DL77516 models) – Non-standard colors are non-returnable – Black standard –

RED	Warm Red	No Charge
GRAY	Gray Granite	No Charge
NAVY	Navy Blue	No Charge
COPPER	Antique Copper	No Charge
WHITE	White Granite	No Charge
GREEN	Hunter Green	No Charge

Simulated stone color – Non-standard colors are non-returnable – Night Sky standard –

SS-GGRAN	Gray Granite	No Charge
SS-BSAND	Bermuda Sand	No Charge

76 mm Risers (GRSSR models only), available in Designer Colors – Non-standard colors are non-returnable – Stainless Steel standard –

3RISER16	GRSSR-16	\$65
3RISER18	GRSSR-18	65
3RISER20	GRSSR-20	65

127 mm Risers (GRSSR models only), available in Designer Colors – Non-standard colors are non-returnable – Stainless Steel standard –

5RISER16	GRSSR-16	\$84
5RISER18	GRSSR-18	84
5RISER20	GRSSR-20	84

ACCESSORIES *(available for purchase at any time)*

WHITE-CTD-240	250 Watt Clear Bulb, 240V, Coated (GRSSR20-DL77516 model accommodates one bulb)	each \$78
----------------------	---	-----------

COLORS AND FINISHES – INSIDE BACK COVER

Glo-Ray® Portable Rectangular Heated Simulated Stone Shelves

Match the heat zone to your countertops with Hatco's Glo-Ray® Portable Rectangular Heated Simulated Stone Shelves. These portable foodsafe shelves come in three simulated stone colors and are ideal for buffet lines or as hors d'oeuvre displays. The unique warmers will safely hold food hot while blending in with your décor.

- Shelves are made of foodsafe materials
- Features a lighted rocker switch and thermostatically-controlled heated base to help hold your food hot and delicious
- Models with simulated stone are Swanstone®



GRSS-3618 in optional Bermuda Sand simulated stone (view of base)



GRSS-3618 in standard Night Sky simulated stone

GLO-RAY PORTABLE RECTANGULAR HEATED SIMULATED STONE SHELVES

Model	Dimensions W x D x H	Watts		Ship Weight	List Price*
		220V-230V	230V-240V		
GRSS-2418	606 x 454 x 66 mm	534-583	583-635	12 kg	\$1928
GRSS-3018	759 x 454 x 66 mm	655-716	716-780	14 kg	2018
GRSS-3618	911 x 454 x 66 mm	782-854	854-930	16 kg	2104
GRSS-4818*	1216 x 454 x 157 mm	1068-1166	1166-1270	20 kg	2282
GRSS-6018*	1521 x 454 x 157 mm	1310-1432	1432-1560	25 kg	2975
GRSS-7218*	1826 x 454 x 157 mm	1564-1708	1708-1860	31 kg	3144

* Available with CE Mark, add \$20.

* Height includes standard 102 mm legs.

All Glo-Ray Portable Rectangular Heated Simulated Stone Shelf Models Feature:

Voltage: 220 or 240, single phase.


Cord Location: 1829 mm cord and plug located center of side with switch.

OPTIONS (available at time of purchase only)

Simulated stone colors – Non-standard colors are non-returnable – Night Sky standard –

SS-GGRAN	Gray Granite	No Charge
SS-BSAND	Bermuda Sand	No Charge

COLORS AND FINISHES – INSIDE BACK COVER



Portable Rectangular Heated Base Glass Shelves

Hatco's Portable Rectangular Heated Base Glass Shelves have a heated ceramic glass surface to create uniform heat across the entire surface and are made of approved foodsafe materials. Adjustable thermostatic controls allow surface temperature ranging from 38° to 90°C to be easily controlled.

- Shelves are made of approved foodsafe materials
- Lighted On/Off rocker switch
- Equipped with a trim ring that is available in Stainless Steel (standard), Designer Black or White
- All units come with a 1829 mm cord and plug



HBG-FS-24 Angled Food Stop (detail view) with **HBG-TRIM-BLK** and optional Designer Black trim ring



HBG-2418 in standard Black Glass



HBG-2418 with Optional White Glass, Frame and Trim Ring

PORTABLE RECTANGULAR HEATED BASE GLASS SHELVES

Model	Dimensions W x D x H	Watts		Ship Weight	List Price*
		220V-230V	230V-240V		
HBG-2418	619 x 467 x 64 mm	420-459	459-500	13 kg	\$2563
HBG-3018	772 x 467 x 64 mm	525-574	574-625	15 kg	2680
HBG-3618*	924 x 467 x 156 mm	630-689	689-750	16 kg	2796
HBG-4818*~	1229 x 467 x 156 mm	840-918	918-1000	19 kg	3030
HBG-6018*~	1534 x 467 x 156 mm	1050-1148	1148-1250	27 kg	3263
HBG-7218*~	1838 x 467 x 156 mm	1260-1378	1378-1500	31 kg	3495

* Available with CE Mark, add \$20.

* Height includes standard 102 mm legs.

~ Units 1219 mm and larger are constructed of two equal size pieces of glass which create a seam.

All Portable Rectangular Heated Base Glass Shelves Feature:

Voltage: 220 or 240, single phase.

Cord Location: 1829 mm cord and plug located on center of side with switch.

OPTIONS (available at time of purchase only)

Ceramic Glass Color – Black standard –

HBG-GLASS-WHT White

No Charge

Angled Food Stop keeps product on the heat zone – Choose size/color

610 mm	HBG-FS-24	Designer Black	each \$140
672 mm	HBG-FS-30	Designer Black	each 167
914 mm	HBG-FS-36	Designer Black	each 194
1219 mm	HBG-FS-48	Designer Black	each 224
1524 mm	HBG-FS-60	Designer Black	each 254
1829 mm	HBG-FS-72	Designer Black	each 286
610 mm	HBG-FSW-24	White	each \$140
672 mm	HBG-FSW-30	White	each 167
914 mm	HBG-FSW-36	White	each 194
1219 mm	HBG-FSW-48	White	each 224
1524 mm	HBG-FSW-60	White	each 254
1829 mm	HBG-FSW-72	White	each 286

Trim Ring – Non-standard colors are non-returnable – Stainless Steel standard –

HBG-TRIM-BLK Designer Black

\$46

HBG-TRIM-WHT White

\$46

Frame (base) color – Non-standard colors are non-returnable – Black standard –

HBG-FRAME-WHT White

No Charge

COLORS AND FINISHES – INSIDE BACK COVER

HBG - xx xx

Heated Base Glass ——— Depth (inches)
Width (inches)

Glo-Ray® Mini-Merchandisers

Hatco's convenient Mini-Merchandisers create impulse sales by placing fresh product in front of customers. Using a limited amount of valuable counterspace, these flexible warmers come in a variety of shapes, sizes and colors to hold food samples, hors d'oeuvres and packaged product at just the right temperature.

- Ideal for delis, supermarkets, convenience stores, kiosks or concession stands where counterspace is limited
- Sturdy sneeze guard safeguards food serving areas
- Lighted rocker switch for easy On/Off
- Shatter-resistant incandescent lights enhance product displays while safeguarding food from bulb breakage
- Thermostatically-controlled heated base to extend holding times of most foods
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Food stop, 102 mm food bins standard (GRHW-1SG only)

GRHW-1P with
Accessory food pan



GRHW-2P with 102 mm legs
and Accessory food pans



GLO-RAY MINI-MERCHANDISERS

Model	No. of Bulbs	Dimensions (W x D x H) Includes sneeze guard	Base Dimensions W x D	Watts		Ship Weight	List Price*
				220V	240V		
GRHW-1P	2	565 x 414 x 451 mm	533 x 349 mm	782	838	16 kg	\$2004
GRHW-2P	4	1098 x 414 x 527 mm	1099 x 349 mm	1560	1680	30 kg	2649
GRHW-1SG	2	565 x 414 x 451 mm	533 x 349 mm	782	838	17 kg	2392

* Available with CE Mark, add \$15.

All Glo-Ray Mini-Merchandiser Models Feature:

Voltage: 220 or 240, single phase.

Mini-Merchandiser Shipped with: Thermostatically-controlled base, 191 mm sneeze guard, display lights, 25 mm rubber legs (except GRHW-2P has 102 mm legs), five 102 mm bins (GRHW-1SG only), 1829 mm cord and plug.

Cord Location: 1829 mm cord and plug located on base end plate, same side as switch.

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Aluminum standard –

RED	Warm Red	\$460
BLACK	Black	460
GRAY	Gray Granite	460
WHITE	White Granite	460
NAVY	Navy Blue	460
GREEN	Hunter Green	460
COPPER	Antique Copper	460
PANEL	Plexi-glass Side Panels	218

ACCESSORIES (available for purchase at any time)


Chef LED 230V adjustable bulb – CE options for input voltages above 200V – bulbs must be rotated down –
See page 45 for more information –

CLED-2700-230	Similar to warm incandescent	CLED-3000-230	Similar to warm halogen light	\$129
CLED-4000-230	Similar to cool fluorescent light			
4"LEGS	102 mm Adjustable Legs (GRHW-1P, -1SG only) – Standard on GRHW-2P			\$60

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER

Chef LED Bulb

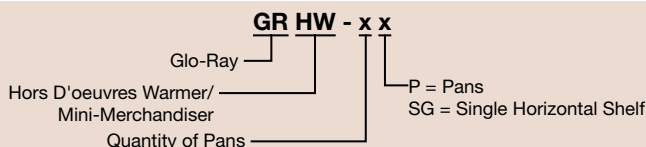

Glo-Ray® Buffet Warmers

Hold hot food at optimum serving temperatures on buffet lines or at temporary serving areas with Hatco Glo-Ray® Buffet Warmers. Choose from either standard or *Designer* style models in many widths to fit your operation.



GRBW-30 in optional *Designer* Navy Blue and Accessory food pans



GR2BW-30 with optional *Designer* Warm Red inset panels and Accessory food pans



GR2BW-30 in optional *Designer* Black and plexi-glass side enclosures plus Accessory food pans

- Available with *Designer* Color insets with the choice of an entire unit in color as well
- Thermostatically-controlled heated base of 27° - 93°C extends holding times of most foods
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Sturdy plexi-glass sneeze guard
- Shatter-resistant incandescent lights enhance product displays while safeguarding food from bulb breakage
- Available in a variety of widths from 635-1988 mm

GLO-RAY BUFFET WARMERS

Model	No. of Light Bulbs	Dimensions (W x D x H) Includes sneeze guard	Max. Pan Capacity 324 x 527 mm pan	Watts		Ship Weight	List Price*
				220V	240V		
GRBW-24	2	635 x 572 x 451 mm	1	920	1000	21 kg	\$2175
GRBW-30	2	787 x 572 x 451 mm	2	1172	1270	24 kg	2403
GRBW-36	3	940 x 572 x 527 mm	2	1454	1578	26 kg	2631
GRBW-42	3	1092 x 572 x 527 mm	3	1648	1782	31 kg	2859
GRBW-48	4	1245 x 572 x 527 mm	3	1940	2040	34 kg	3087
GRBW-54	4	1397 x 572 x 527 mm	4	2182	2360	37 kg	3315
GRBW-60	5	1549 x 572 x 527 mm	4	2474	2680	41 kg	3543
GRBW-66	5	1702 x 572 x 527 mm	5	2726	2948	44 kg	3771
GRBW-72	5	1854 x 572 x 527 mm	5	2983	3113	49 kg	3999

* Available with CE Mark, add \$20.

All Glo-Ray Buffet Warmer Models Feature:

Voltage: 220 or 240, single phase.

GRBW Base Dimensions: 635-1854 W x 495 D mm.

Cord Location: 1829 mm cord located on base end plate, same side as switch.

GLO-RAY DESIGNER BUFFET WARMERS

Model*	No. of Light Bulbs	Dimensions (W x D x H) Includes sneeze guard	Max. Pan Capacity 324 x 527 mm pan	Watts		Ship Weight	List Price*
				220V	240V		
GR2BW-24	2	768 x 686 x 483 mm	1	950	970	35 kg	\$3851
GR2BW-30	2	921 x 686 x 559 mm	2	1210	1230	39 kg	4210
GR2BW-36	2	1073 x 686 x 559 mm	2	1450	1470	44 kg	4569
GR2BW-42	4	1226 x 686 x 559 mm	3	1750	1790	50 kg	5046
GR2BW-48	4	1378 x 686 x 559 mm	3	2000	2040	57 kg	5523
GR2BW-54	4	1530 x 686 x 559 mm	4	2250	2290	59 kg	6093
GR2BW-60	6	1683 x 686 x 559 mm	4	2600	2660	70 kg	6663
GR2BW-66	6	1835 x 686 x 559 mm	5	2860	2920	77 kg	7129
GR2BW-72 ■	6	1988 x 686 x 559 mm	5	3125	3185	84 kg	7595

• When no color is specified, color inset panels and corner caps will be black.

* Available with CE Mark, add \$20.

■ Cord with out plug on 240V


All Glo-Ray Designer Buffet Warmer Models Feature:

Voltage: 220 or 240, single phase.

Usable Heated Shelf Space: Width of unit minus 165 W x 552 D mm.

Cord Location: 1829 mm cord and plug located center of bottom on control side.

OPTIONS AND ACCESSORIES – PAGE 96





GRBW-30 with
Accessory food pans

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Aluminum standard –

RED	Warm Red	\$460
BLACK	Black	460
GRAY	Gray Granite	460
WHITE	White Granite	460
GREEN	Hunter Green	460
NAVY	Navy Blue	460
COPPER	Antique Copper	460

Designer Inset Panel colors, GR2BW models – Non-standard colors are non-returnable – Black standard –

RED	Warm Red	No Charge
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
GREEN	Hunter Green	No Charge
NAVY	Navy Blue	No Charge
COPPER	Antique Copper	No Charge

Designer Corner Caps, GR2BW models – Non-standard colors are non-returnable – Black standard –

DKGRAY	Dark Gray	No Charge
--------	-----------	-----------

Acrylic Front and Two Side Enclosures in lieu of Sneeze Guards – (GRBW-24, -30, -36, -42, -48 models only)

FRTENCL-24, -30	-24, -30 models	\$419
FRTENCL-36, -42, -48	-36, -42, -48 models	478
SIDE-ENCL	Two Acrylic Side Enclosures (GRBW models only)	\$285
SIDE-ENCL2	Two Acrylic Side Enclosures (GR2BW models only)	285

Hardcoat Aluminum Surface, GRBW models –

HC 24-42	GRBW-24 through GRBW-42	\$149
HC 48-72	GRBW-48 through GRBW-72	298
INF	Infinite Control for top heat only (GRBW-24 through -60 and GR2BW-24 through -60 models only)	47
9.375BP	238 mm Sneeze Guard in lieu of standard 191 mm (GRBW models only)	add per 305 mm per side 13
14BP	356 mm Sneeze Guard in lieu of standard 191 mm	add per 305 mm per side 25

ACCESSORIES

GRBW-LEGS	102 mm Adjustable Legs for GRBW-24 models (standard on GRBW-36 or larger)	\$ 60
2SD-LEGS	102 mm Designer Legs for GR2BW-24 models (standard on GR2BW-30 or larger)	112

Pan Rail for GRBW models (not for use with Acrylic Front Enclosure)

2 RAIL	2-pan	\$194
3 RAIL	3-pan	210
4 RAIL	4-pan	391
5 RAIL	5-pan	405

Chef LED 230V adjustable bulb – CE options for input voltages above 200V – bulbs must be rotated down –


See page 45 for more information – 129

CLED-2700-230 Similar to warm incandescent

CLED-3000-230 Similar to warm halogen light

CLED-4000-230 Similar to cool fluorescent light

COLORS AND FINISHES – INSIDE BACK COVER



2 RAIL



3 RAIL




2SD-LEGS



Chef LED Bulb

Built-Ins

Cafeterias • Buffets
Supermarkets & Delis • Restaurants & Cafés

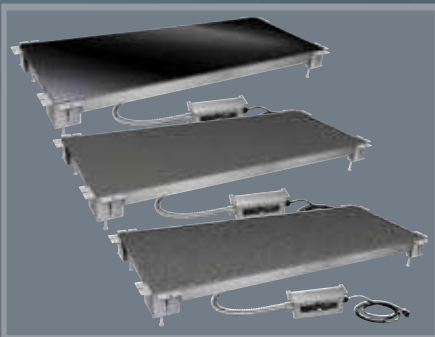

HSBF-GL-4818 in standard Black Ceramic Glass,
HSBF-HC-4818 in standard Hardcoat Aluminum,
HSBF-SS-4818 in standard Night Sky
Simulated Stone *pg. 98-100*



CSSBF-48-S in optional Bermuda Sand simulated
stone built into a Bermuda Sand simulated
stone countertop *pg. 102*




HCSBF-48-S in hot mode *pg. 111*



HCSBF-48-S in cold mode *pg. 111*



GRSSB-3618 in optional Bermuda Sand built into a
simulated stone countertop (shown below an Antique
Copper **GR2AHL-42** Strip Heater with optional
sneeze guards, adjustable tubular stands) *pg. 113*

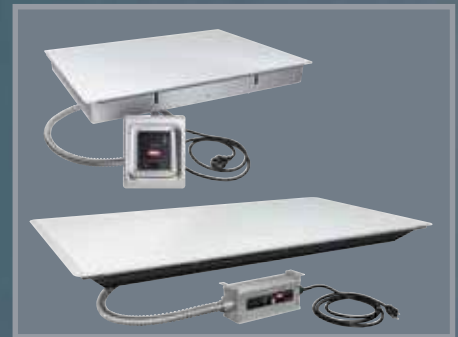

HBGBH-2418 and a **HBGB-3618** with optional
Trim Ring in optional White Glass *pg. 114*



GRSB-30-I and accessory food pans (shown below
a **GRAHL-36** Strip Heater with optional sneeze
guards and adjustable tubular stands) *pg. 116*



GRSB-54-I and accessory food pans (shown
below a **GRAL-96D** Strip Heater with optional
sneeze guard) *pg. 116*



GRSBF-60-0 built into a simulated stone
countertop with accessory food pans (shown
below a **GR2AL-96D** Strip Heater in *Designer
Black* with optional Sneeze Guards) *pg. 118*

Heated Shelves Built-In Flush - Ceramic Glass

Give your operation a seamless look with the Heated Shelves Built-In Flush-Ceramic Glass. The bracket mounting hardware gives a true flush mount appearance that will safely hold food hot while blending in with your decor. It is a must for buffet lines in cafeterias, restaurants and more!

- All models have a Ceramic Glass surface and are bottom mount, flush with the countertop
- Standard Black or optional white Ceramic Glass surface
- Blanket-type element with thermostatically-controlled heated base results in uniform heat to extend food holding times
- Insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature
- Standard control includes thermostat, lighted rocker switch and mounting brackets
- 914 mm Conduit is standard – Option: with ITC Control Boxes only, 1829 and 3048 mm lengths are available



HSBF-GL-4818
in standard
Black Glass



HSBF-GL-4818
in optional
White Glass

HEATED SHELVES BUILT-IN FLUSH - CERAMIC GLASS

Model [^]	Overall Shelf Dimensions (includes brackets) W x D x H	Heated Shelf Space W x D	Cutout Size (with 10 mm corner radii) W x D	Watts/Amps			List Price
				220V	230V	240V	
HSBF-GL-2418	687 x 537 x 139 mm	607 x 457 mm	616 x 467 mm	420 / 1.9	459 / 2.0	500 / 2.1	\$2899
HSBF-GL-3018	839 x 537 x 139 mm	759 x 457 mm	768 x 467 mm	525 / 2.4	574 / 2.5	625 / 2.6	3021
HSBF-GL-3618	992 x 537 x 139 mm	912 x 457 mm	921 x 467 mm	630 / 2.9	689 / 3.0	750 / 3.1	3150
HSBF-GL-4818	1297 x 537 x 139 mm	1217 x 457 mm	1226 x 467 mm	840 / 3.8	918 / 4.0	1000 / 4.2	3452

[^] Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.

All Heated Shelves Built-In Flush-Ceramic Glass feature:

Control Box: Flush Mount Electronic Temperature Control with 914 mm conduit.

Cord Location: Cord is attached to Control Box.

Cord and Plug: 1829 mm cord and plug.

OPTIONS (available at time of purchase only)

Ceramic Glass Color – Black standard –

HSBF-GLASS-WHT White

No Charge

Designer Color for Flush Mount Control Bezel – Stainless Steel standard – Non-standard colors are non-returnable

RED	Warm Red	\$ 46
BLACK	Black	46
GRAY	Gray Granite	46
WHITE	White Granite	46
NAVY	Navy Blue	46
GREEN	Hunter Green	46
COPPER	Antique Copper	46

HSBF-FLUSH-ITC Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 134 D mm) **196**

HSBF-SMFLUSH-ITC Flush Mount Electronic Control Box with lighted On/Off rocker switch (215 W x 102 H x 97 mm D) **196**

HSBF-FLUSH-TSTAT Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 115 mm D) **No Charge**

HSBF-SMFLUSH-TSTAT Flush Mount Thermostatic Control Box with lighted On/Off rocker switch (215 W x 94 H x 100 mm D) **No Charge**

COND-6 1829 mm Conduit (914 mm standard) – used with Flush Mount and Small Flush Mount ITC Control Boxes only **\$45**

COND-10 3048 mm Conduit (914 mm standard) – used with Flush Mount and Small Flush Mount ITC Control Boxes only **86**

COLORS AND FINISHES – INSIDE BACK COVER



HSBF-SMFLUSH-ITC



HSBF-SMFLUSH-TSTAT



HSBF-FLUSH-ITC



HSBF-FLUSH-TSTAT

OPTIONAL CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
HSBF-FLUSH-ITC	149 mm	162 mm	121 mm
HSBF-FLUSH-TSTAT	149 mm	162 mm	102 mm
HSBF-SMFLUSH-ITC	171 mm	95 mm	92 mm
HSBF-SMFLUSH-TSTAT	171 mm	87 mm	86 mm



Heated Shelves Built-In Flush - Hardcoat Aluminum

Give your operation a seamless look with the Heated Shelves Built-In Flush-Hardcoat Aluminum. The bracket mounting hardware gives a true flush mount appearance that will safely hold food hot while blending in with your decor. It is a must for buffet lines in cafeterias, restaurants and more!

- All models have a Hardcoat Aluminum surface and are bottom mount, flush with the countertop
- Blanket-type element with thermostatically-controlled heated base results in uniform heat to extend food holding times.
- Insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature
- Standard control includes thermostat, lighted rocker switch and mounting brackets
- 914 mm Conduit is standard – Option: with ITC Control Boxes only, 1829 and 3048 mm lengths are available

HSBF-HC-4818



HEATED SHELVES BUILT-IN FLUSH - HARDCOAT ALUMINUM

Model^	Overall Shelf Dim. (includes brackets) W x D x H	Heated Shelf Space W x D	Cutout Size (with 10 mm corner radii) W x D	Watts/Amps			List Price
				220V	230V	240V	
HSBF-HC-2418	690 x 537 x 135 mm	610 x 457 mm	619 x 467 mm	420 / 1.9	459 / 2.0	500 / 2.1	\$1787
HSBF-HC-2424	690 x 690 x 135 mm	610 x 610 mm	619 x 619 mm	622 / 2.8	680 / 3.0	740 / 3.1	1794
HSBF-HC-2430	690 x 842 x 135 mm	610 x 762 mm	619 x 772 mm	722 / 3.3	790 / 3.4	860 / 3.6	1949
HSBF-HC-3018	842 x 537 x 135 mm	762 x 457 mm	772 x 467 mm	525 / 2.4	574 / 2.5	625 / 2.6	1904
HSBF-HC-3024	842 x 690 x 135 mm	762 x 610 mm	772 x 619 mm	746 / 3.4	815 / 3.5	887 / 3.7	1912
HSBF-HC-3030	842 x 842 x 135 mm	762 x 762 mm	772 x 772 mm	869 / 4.0	950 / 4.1	1034 / 4.3	2121
HSBF-HC-3618	994 x 537 x 135 mm	914 x 457 mm	924 x 467 mm	630 / 2.9	689 / 3.0	750 / 3.1	2024
HSBF-HC-3624	994 x 690 x 135 mm	914 x 610 mm	924 x 619 mm	870 / 4.0	950 / 4.1	1034 / 4.3	2033
HSBF-HC-3630	994 x 842 x 135 mm	914 x 762 mm	924 x 772 mm	933 / 4.2	1020 / 4.4	1110 / 4.6	2362
HSBF-HC-4218	1147 x 537 x 135 mm	1067 x 457 mm	1076 x 467 mm	680 / 3.1	744 / 3.2	810 / 3.4	2124
HSBF-HC-4224	1147 x 690 x 135 mm	1067 x 610 mm	1076 x 619 mm	997 / 4.5	1090 / 4.7	1187 / 4.9	2135
HSBF-HC-4230	1147 x 842 x 135 mm	1067 x 762 mm	1076 x 772 mm	1162 / 5.3	1270 / 5.5	1383 / 5.8	2594
HSBF-HC-4818	1299 x 537 x 135 mm	1219 x 457 mm	1229 x 467 mm	840 / 3.8	918 / 4.0	1000 / 4.2	2238
HSBF-HC-4824	1299 x 690 x 135 mm	1219 x 610 mm	1229 x 619 mm	1121 / 5.1	1225 / 5.3	1334 / 5.6	2249
HSBF-HC-4830	1299 x 842 x 135 mm	1219 x 762 mm	1229 x 772 mm	1201 / 5.5	1314 / 5.7	1430 / 6.0	2795

^ Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.

All Heated Shelves Built-In Flush-Hardcoat Aluminum feature:

Control Box: Flush Mount Electronic Temperature Control with 914 mm conduit. **Cord Location:** Cord is attached to Control Box.
Cord and Plug: 1829 mm cord and plug.

OPTIONS (available at time of purchase only)

Designer Color for Flush Mount Control Bezel – Stainless Steel standard – Non-standard colors are non-returnable

	RED	Warm Red	BLACK	Black	\$ 46
	GRAY	Gray Granite	WHITE	White Granite	46
	NAVY	Navy Blue	GREEN	Hunter Green	46
	COPPER	Antique Copper			46
HSBF-FLUSH-ITC	Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 134 D mm)				196
HSBF-SMFLUSH-ITC	Flush Mount Electronic Control Box with lighted On/Off rocker switch (215 W x 102 H x 97 mm D)				196
HSBF-FLUSH-TSTAT	Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 155 mm D)				No Charge
HSBF-SMFLUSH-TSTAT	Flush Mount Thermostatic Control Box with lighted On/Off rocker switch (215 W x 94 H x 100 mm D)				No Charge
COND-6	1829 mm Conduit (914 mm standard) – used with Flush Mount and Small Flush Mount ITC Control Boxes only				45
COND-10	3048 mm Conduit (914 mm standard) – used with Flush Mount and Small Flush Mount ITC Control Boxes only				86

COLORS AND FINISHES – INSIDE BACK COVER



HSBF-SMFLUSH-ITC



HSBF-SMFLUSH-TSTAT




HSBF-FLUSH-ITC



HSBF-FLUSH-TSTAT

OPTIONAL CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
HSBF-FLUSH-ITC	149 mm	162 mm	121 mm
HSBF-FLUSH-TSTAT	149 mm	162 mm	102 mm
HSBF-SMFLUSH-ITC	171 mm	95 mm	92 mm
HSBF-SMFLUSH-TSTAT	171 mm	87 mm	86 mm



Heated Shelves Built-In Flush - Simulated Stone

Give your operation a seamless look with the Heated Shelves Built-In Flush-Simulated Stone. The bracket mounting hardware gives a true flush mount appearance that will safely hold food hot while blending in with your decor. It is a must for buffet lines in cafeterias, restaurants and more!

- All models have a Simulated Stone surface and are bottom mount, flush with the countertop
- Simulated stone is Swanstone®
- Blanket-type element with thermostatically-controlled heated base results in uniform heat to extend food holding times
- Insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature.
- Standard control includes thermostat, lighted rocker switch and mounting brackets
- 914 mm Conduit is standard – Option: with ITC Control Boxes only, 1829 and 3048 mm lengths are available



HSBF-SS-4818
in standard Night Sky



HSBF-SS-4818
in optional
Gray Granite

HSBF-SS-4818
in optional
Bermuda Sand



HEATED SHELVES BUILT-IN FLUSH - SIMULATED STONE

Model [^]	Overall Shelf Dimensions (includes brackets) W x D x H	Heated Shelf Space W x D	Cutout Size (with 10 mm corner radii) W x D	Watts/Amps			List Price
				220V	230V	240V	
HSBF-SS-2418	686 x 533 x 142 mm	610 x 457 mm	619 x 467 mm	534 / 2.4	583 / 2.5	635 / 2.6	\$2139
HSBF-SS-3018	838 x 533 x 142 mm	762 x 457 mm	772 x 467 mm	655 / 3.0	716 / 3.1	780 / 3.3	2226
HSBF-SS-3618	990 x 533 x 142 mm	914 x 457 mm	924 x 467 mm	782 / 3.6	854 / 3.7	930 / 3.9	2320
HSBF-SS-4818	1295 x 533 x 142 mm	1219 x 457 mm	1229 x 467 mm	1068 / 4.9	1166 / 5.1	1270 / 5.3	2630

[^] Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.

All Heated Shelves Built-In Flush-Simulated Stone feature:

Control Box: Flush Mount Electronic Temperature Control with 914 mm conduit.

Cord Location: Cord is attached to Control Box. **Cord and Plug:** 1829 mm cord and plug.

OPTIONS (available at time of purchase only)

Simulated stone colors – Non-standard colors are non-returnable – Night Sky standard – No Charge

SS-GGRAN Gray Granite **SS-BSAND** Bermuda Sand

Designer Color for Flush Mount Control Bezel – Stainless Steel standard – Non-standard colors are non-returnable

RED	Warm Red	\$ 46
BLACK	Black	46
GRAY	Gray Granite	46
WHITE	White Granite	46
NAVY	Navy Blue	46
GREEN	Hunter Green	46
COPPER	Antique Copper	46

HSBF-FLUSH-ITC Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 134 D mm) **196**

HSBF-SMFLUSH-ITC Flush Mount Electronic Control Box with lighted On/Off rocker switch (215 W x 102 H x 97 mm D) **196**

HSBF-FLUSH-TSTAT Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 115 mm D) **No Charge**

HSBF-SMFLUSH-TSTAT Flush Mount Thermostatic Control Box with lighted On/Off rocker switch (215 W x 94 H x 100 mm D) **No Charge**

COND-6 1829 mm Conduit (914 mm standard) – used with Flush Mount and Small Flush Mount ITC Control Boxes only **45**

COND-10 3048 mm Conduit (914 mm standard) – used with Flush Mount and Small Flush Mount ITC Control Boxes only **86**

COLORS AND FINISHES – INSIDE BACK COVER

OPTIONAL CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
HSBF-FLUSH-ITC	149 mm	162 mm	121 mm
HSBF-FLUSH-TSTAT	149 mm	162 mm	102 mm
HSBF-SMFLUSH-ITC	171 mm	95 mm	92 mm
HSBF-SMFLUSH-TSTAT	171 mm	87 mm	86 mm



HSBF-SMFLUSH-ITC




HSBF-SMFLUSH-TSTAT



HSBF-FLUSH-ITC



HSBF-FLUSH-TSTAT



Cold Simulated Stone Shelves Built-In

Hatco's Cold Simulated Stone Shelves Built-In are a must for buffet lines in cafeterias, restaurants and much more! CSSBR and CSSBX have the benefit of allowing fabricators freedom to design.

- Patented thermal break reduces condensation and temperature transfer on adjacent surfaces
- All models are bottom mount units
- Simulated stone is Swanstone®
- All models match the GRSSB Heated Simulated Stone Built-In Shelves for a fully integrated look
- Control Box comes standard with 1219 mm lead wire
- CSSB Control Box can be mounted 1219 mm from center of shelf
- Condensing unit may be mounted up to 1219 mm away from center of shelf (CSSB models only)
- CSSB models offer a long, flexible refrigerant line which allows condensing unit to be pulled out for service
- Condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver (CSSB, CSSBR models only)
- CSSBR models have unattached Condensing unit and Control Box, CSSBX models have unattached Control Box only



CSSB-4818
in optional
Bermuda Sand
simulated stone



CSSBR-4818
in standard Night Sky
simulated stone – All models
come with unattached
Condenser and Control Box



CSSBX-4818
in Granite Gray simulated
stone – All models come with
unattached Control Box only

COLD SIMULATED STONE SHELVES BUILT-IN (flush to countertop)

Model*	Overall Shelf Dim. (includes brackets) W x D	Usable Space W x D	Approx. Ship Weight	List Price
CSSB-2418	686 x 533 mm	610 x 457 mm	56 kg	\$7904
CSSB-3018	838 x 533 mm	762 x 457 mm	60 kg	7983
CSSB-3618	991 x 533 mm	914 x 457 mm	66 kg	8226
CSSB-4818	1295 x 533 mm	1219 x 457 mm	79 kg	9293

* Not available with CE Mark.

Consult factory for refrigerant specifications.

All Models Feature:

Voltage: 220, 230 or 240 (CE not available). Models Shipped with: Electronic Temperature Control and condensing unit, 1829 mm cord and plug

COLD SIMULATED STONE SHELVES BUILT-IN with UNATTACHED CONDENSER/CONTROL BOX

Model *	Overall Shelf Dim. (includes brackets) W x D	Usable Space W x D	Approx. Ship Weight	List Price
CSSBR-2418	686 x 533 mm	610 x 457 mm	40 kg	\$7057
CSSBR-3018	838 x 533 mm	762 x 457 mm	46 kg	7136
CSSBR-3618	991 x 533 mm	914 x 457 mm	47 kg	7379
CSSBR-4818	1295 x 533 mm	1219 x 457 mm	59 kg	8446

* Not available with CE Mark.

Consult factory for refrigerant specifications.

All Models Feature:

Voltage: 220, 230 or 240 (CE not available). Models Shipped with: Shelf assembly with temperature probe, Control Box and condensing unit (shipped loose), TVX valve (unattached).

COLD SIMULATED STONE SHELVES BUILT-IN with UNATTACHED CONTROL BOX only

Model *	Overall Shelf Dim. (includes brackets) W x D	Usable Space W x D	Watts 220V, 230V, 240V	Approx. Ship Weight	List Price
CSSBX-2418	686 x 533 mm	610 x 457 mm	17	40 kg	\$5678
CSSBX-3018	838 x 533 mm	762 x 457 mm	17	45 kg	5757
CSSBX-3618	991 x 533 mm	914 x 457 mm	17	45 kg	6000
CSSBX-4818	1295 x 533 mm	1219 x 457 mm	17	57 kg	7067

* Not available with CE Mark.

All Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probe, solenoid valve (attached to shelf), Control Box (shipped loose), TVX valve (unattached).

NOTE: All models are not a CE offering, items are sold as components for fabricator self certification.

OPTIONS

(available at time of purchase only)

Simulated stone colors –

Non-standard colors are non-returnable – Night Sky standard –

SS-GGRAN Gray Granite No Charge

SS-BSAND Bermuda Sand No Charge

COND-8.5 2591 mm cord (1524 mm standard), CSSB models only \$14

COLORS AND FINISHES – INSIDE BACK COVER

COUNTERTOP CUTOUT DIMENSIONS

Model	Width with 10 mm radii	Height with 10 mm radii
CSSB(R)(X)-2418	619 mm	467 mm
CSSB(R)(X)-3018	772 mm	467 mm
CSSB(R)(X)-3618	924 mm	467 mm
CSSB(R)(X)-4818	1229 mm	467 mm
Model	Width	Height
Control Box (208 W x 165 mm D)	189 mm	143 mm

 **ecoization**
CSSB(R) models only

CSSB(x) - xx xx
Cold ————
Simulated Stone Shelf
Built-In ————
Depth of Shelf
Width of Shelf (inches)
R = Remote Condenser and Control Box
X = Remote Control Box only

Cold Simulated Stone Shelves Built-In Flush Top

Hatco's new sturdy Cold Simulated Stone Shelves Built-In Flush Top are a must for buffet lines in cafeterias, restaurants and more!

- Patented thermal break reduces condensation and temperature transfer on adjacent surfaces
- Simulated stone is Swanstone®
- All models are bottom mount units
- Control Box comes standard with a 1219 mm lead wire

- Control Box can be mounted 1219 mm from center of the shelf (CSSBF models only)
- CSSBF models offer a long, flexible refrigerant line which allows condensing unit to be pulled out for service
- Condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver (CSSBF, CSSBFR models only)

continued on next page...



CSSBF-48-S
in standard Night Sky
simulated stone



CSSBFR-48-S
in optional
Bermuda Sand – All
models come with
unattached Condenser
and Control Box

COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP

Model *	Overall Shelf Dim. (includes brackets) W x D	Usable Space W x D	Approx. Ship Weight	List Price
CSSBF-24-F	686 x 470 mm	610 x 394 mm	54 kg	\$ 7891
CSSBF-24-I	686 x 572 mm	610 x 495 mm	57 kg	7923
CSSBF-24-S	686 x 686 mm	610 x 610 mm	61 kg	8169
CSSBF-36-F	991 x 470 mm	914 x 394 mm	63 kg	8190
CSSBF-36-I	991 x 572 mm	914 x 495 mm	71 kg	8223
CSSBF-36-S	991 x 686 mm	914 x 610 mm	75 kg	9626
CSSBF-48-F	1295 x 470 mm	1219 x 394 mm	73 kg	9259
CSSBF-48-I	1295 x 572 mm	1219 x 495 mm	78 kg	9292
CSSBF-48-S	1295 x 686 mm	1219 x 610 mm	86 kg	10847

* Not available with CE Mark.

Consult factory for refrigerant specifications.

All Cold Simulated Stone Shelves Built-In Flush Top Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Electronic Temperature Control and condensing unit, 1829 mm cord and plug.

NOTE: Models are not a CE offering, items are sold as components for fabricator self certification.

COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP with UNATTACHED CONDENSER/CONTROL BOX

Model *	Overall Shelf Dim. (includes brackets) W x D	Usable Space W x D	Approx. Ship Weight	List Price
CSSBFR-24-F	686 x 470 mm	610 x 394 mm	56 kg	\$ 7044
CSSBFR-24-I	686 x 572 mm	610 x 495 mm	56 kg	7076
CSSBFR-24-S	686 x 686 mm	610 x 610 mm	69 kg	7322
CSSBFR-36-F	991 x 470 mm	914 x 394 mm	69 kg	7343
CSSBFR-36-I	991 x 572 mm	914 x 495 mm	69 kg	7376
CSSBFR-36-S	991 x 686 mm	914 x 610 mm	71 kg	8779
CSSBFR-48-F	1295 x 470 mm	1219 x 394 mm	71 kg	8412
CSSBFR-48-I	1295 x 572 mm	1219 x 495 mm	71 kg	8445
CSSBFR-48-S	1295 x 686 mm	1219 x 610 mm	76 kg	10000

* Not available with CE Mark.

Consult factory for refrigerant specifications.

All Cold Simulated Stone Shelves Built-In Flush Top with Unattached Condenser/Control Box Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probe, Control Box and condensing unit (shipped loose), TXV valve (unattached).

OPTIONS – PAGE 103

Cold Simulated Stone Shelves Built-In Flush Top

continued...

- CSSBR models have unattached Condensing unit and Control Box, CSSBX models have unattached Control Box only
- CSSBFR, CSSBFX models have benefit of allowing fabricators the freedom to design



CSSBFX-48-S
in optional Gray Granite simulated stone – All models come with unattached Control Box only

COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP with UNATTACHED CONTROL BOX only

Model *	Overall Shelf Dim. (includes brackets) W x D	Usable Space W x D	Watts 220V, 230V, 240V	Approx. Ship Weight	List Price
CSSBFX-24-F	686 x 470 mm	610 x 394 mm	17	36 kg	\$5665
CSSBFX-24-I	686 x 572 mm	610 x 495 mm	17	36 kg	5697
CSSBFX-24-S	686 x 686 mm	610 x 610 mm	17	41 kg	5943
CSSBFX-36-F	991 x 470 mm	914 x 394 mm	17	44 kg	5964
CSSBFX-36-I	991 x 572 mm	914 x 495 mm	17	50 kg	5997
CSSBFX-36-S	991 x 686 mm	914 x 610 mm	17	54 kg	7400
CSSBFX-48-F	1295 x 470 mm	1219 x 394 mm	17	54 kg	7033
CSSBFX-48-I	1295 x 572 mm	1219 x 495 mm	17	59 kg	7066
CSSBFX-48-S	1295 x 686 mm	1219 x 610 mm	17	66 kg	8621

* Not available with CE Mark.

All Cold Simulated Stone Shelves Built-In Flush Top with Unattached Control Box Only Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probe, solenoid valve (attached to shelf), Control Box (shipped loose) TXV valve (unattached).

NOTE: Models are not a CE offering, items are sold as components for fabricator self certification.

COUNTERTOP CUTOUT DIMENSIONS

Model	Width with 10 mm radii	Height with 10 mm radii
CSSBF(R)(X)-24-F	619 mm	403 mm
CSSBF(R)(X)-24-I	619 mm	505 mm
CSSBF(R)(X)-24-S	619 mm	619 mm
CSSBF(R)(X)-36-F	924 mm	403 mm
CSSBF(R)(X)-36-I	924 mm	505 mm
CSSBF(R)(X)-36-S	924 mm	619 mm
CSSBF(R)(X)-48-F	1229 mm	403 mm
CSSBF(R)(X)-48-I	1229 mm	505 mm
CSSBF(R)(X)-48-S	1229 mm	619 mm


Model	Width	Height
Control Box (208 W x 165 mm D)	189 mm	143 mm

OPTIONS (available at time of purchase only)

Simulated stone colors – Non-standard colors are non-returnable – Night Sky standard –

SS-GGRAN	Gray Granite	No Charge
SS-BSAND	Bermuda Sand	No Charge
COND-8.5	2591 mm cord (1524 mm standard) CSSBF models only	\$14

COLORS AND FINISHES – INSIDE BACK COVER

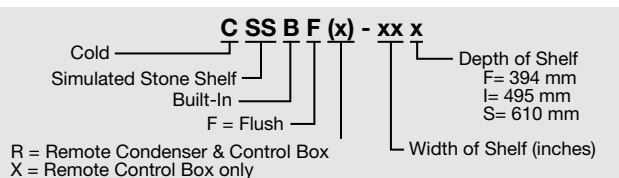

Cold Shelves Built-In Flush Top

Hatco's Cold Built-In Flush Top Shelves, in our signature Hardcoat Aluminium, are designed to keep your pre-chilled beverages, hors d'oeuvres, side dishes, buffet items and more, perfectly chilled.

- Patented thermal break reduces condensation and temperature transfer on adjacent surfaces
- All models are top mounted with an Hardcoat Aluminum surface
- All models match the GRSBF Heated Built-In Shelves for a fully integrated look
- Control comes standard with a 1219 mm lead wire

- Control Box can be mounted 1219 mm from center of shelf (CSBF models only)
- CSBF models offer a long, flexible refrigerant line which allows condensing unit to be pulled out for service
- Condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver (CSBF, CSBFR models only)

continued on next page...



CSBF-48-S
(Flush Top)



CSBFR-48-S
(Flush Top) All models come with unattached Condenser and Control Box

COLD SHELVES BUILT-IN FLUSH TOP (Hardcoat Aluminum)

Model *	Overall Shelf Dimensions W x D	Usable Shelf Space W x D	Approx. Ship Weight	List Price
CSBF-24-F	648 x 432 mm	610 x 394 mm	46 kg	\$7606
CSBF-24-I	648 x 533 mm	610 x 495 mm	53 kg	7631
CSBF-24-S	648 x 648 mm	610 x 610 mm	54 kg	7734
CSBF-36-F	953 x 432 mm	914 x 394 mm	59 kg	7757
CSBF-36-I	953 x 533 mm	914 x 495 mm	59 kg	7789
CSBF-36-S	953 x 648 mm	914 x 610 mm	69 kg	8864
CSBF-48-F	1257 x 432 mm	1219 x 394 mm	63 kg	8683
CSBF-48-I	1257 x 533 mm	1219 x 495 mm	72 kg	8717
CSBF-48-S	1257 x 648 mm	1219 x 610 mm	81 kg	9621

* Not available with CE Mark.

Consult factory for refrigerant specifications.

All Cold Shelves Built-In Flush Top Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Electronic Temperature Control and condensing unit, 1829 mm cord and plug.

NOTE: Models are not a CE offering, items are sold as components for fabricator self certification.

COLD SHELVES BUILT-IN FLUSH TOP (Hardcoat Aluminum) with UNATTACHED CONDENSER/CONTROL BOX

Model *	Overall Shelf Dimensions W x D	Usable Shelf Space W x D	Approx. Ship Weight	List Price
CSBFR-24-F	648 x 432 mm	610 x 394 mm	47 kg	\$6928
CSBFR-24-I	648 x 533 mm	610 x 495 mm	58 kg	6953
CSBFR-24-S	648 x 648 mm	610 x 610 mm	58 kg	7056
CSBFR-36-F	953 x 432 mm	914 x 394 mm	39 kg	7079
CSBFR-36-I	953 x 533 mm	914 x 495 mm	37 kg	7111
CSBFR-36-S	953 x 648 mm	914 x 610 mm	64 kg	8186
CSBFR-48-F	1257 x 432 mm	1219 x 394 mm	67 kg	8005
CSBFR-48-I	1257 x 533 mm	1219 x 495 mm	67 kg	8039
CSBFR-48-S	1257 x 648 mm	1219 x 610 mm	76 kg	8943

* Not available with CE Mark.

Consult factory for refrigerant specifications.

All Cold Shelves Built-In Flush Top with Unattached Condenser/Control Box Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probe, Control Box and condensing unit (shipped loose), TXV valve (unattached).

OPTIONS – PAGE 105

Cold Shelves Built-In Flush Top

continued

- CSBFR models have unattached Condensing unit and Control Box, CSBFX models have unattached Control Box only
- CSBFR, CSBFX models have benefit of allowing fabricators the freedom to design



CSBFX-48-S
(Flush Top) All models come with unattached Control Box only

GOLD SHELVES BUILT-IN FLUSH TOP (Hardcoat Aluminum) with UNATTACHED CONTROL BOX only

Model *	Overall Shelf Dimensions W x D	Usable Shelf Space W x D	Rated Watts	Approx. Ship Weight	List Price 220V, 230V, 240V
CSBFX-24-F	648 x 432 mm	610 x 394 mm	17	29 kg	\$5380
CSBFX-24-I	648 x 533 mm	610 x 495 mm	17	33 kg	5405
CSBFX-24-S	648 x 648 mm	610 x 610 mm	17	36 kg	5508
CSBFX-36-F	953 x 432 mm	914 x 394 mm	17	35 kg	5531
CSBFX-36-I	953 x 533 mm	914 x 495 mm	17	41 kg	5563
CSBFX-36-S	953 x 648 mm	914 x 610 mm	17	54 kg	6638
CSBFX-48-F	1257 x 432 mm	1219 x 394 mm	17	53 kg	6457
CSBFX-48-I	1257 x 533 mm	1219 x 495 mm	17	60 kg	6491
CSBFX-48-S	1257 x 648 mm	1219 x 610 mm	17	66 kg	7395

* Not available with CE Mark.

All Cold Shelves Built-In Flush Top with Unattached Control Box Only Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probe, solenoid valve (attached to shelf), Control Box (shipped loose), TXV valve (unattached).


OPTIONS (available at time of purchase only)

COND-8.5 2591 mm cord (1524 mm standard) CSBF models only **\$14**

COLORS AND FINISHES – INSIDE BACK COVER

COUNTERTOP CUTOUT DIMENSIONS

Model	Width		Depth	
	Minimum	Maximum	Minimum	Maximum
CSBF(X)(R)-24-F	625 mm	635 mm	409 mm	419 mm
CSBF(X)(R)-24-I	625 mm	635 mm	511 mm	521 mm
CSBF(X)(R)-24-S	625 mm	635 mm	625 mm	635 mm
CSBF(X)(R)-36-F	930 mm	940 mm	409 mm	419 mm
CSBF(X)(R)-36-I	930 mm	940 mm	511 mm	521 mm
CSBF(X)(R)-36-S	930 mm	940 mm	625 mm	635 mm
CSBF(X)(R)-48-F	1234 mm	1245 mm	409 mm	419 mm
CSBF(X)(R)-48-I	1234 mm	1245 mm	511 mm	521 mm
CSBF(X)(R)-48-S	1234 mm	1245 mm	625 mm	635 mm
Control Box (208 W x 165 mm D)	189 mm		143 mm	

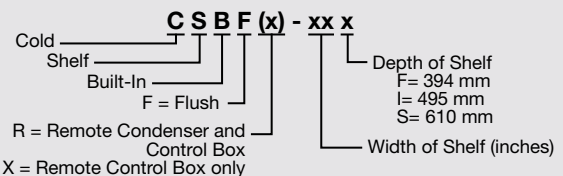

Cold Shelves Undermount


Cold Shelves Undermount offer the same great performance as the Cold Built-In Flush Top Shelves, but are mounted directly against the underside of a granite, quartz, stainless steel or appropriate simulated stone counter top (no cut out required). Cooling transfers through the countertop to the top surface, without puncturing, for a true, seamless look.

- Mount under appropriate countertop material for a seamless look
- Approved materials include granite and quartz up to 30 mm, Swanstone as provided by Hatco, and certain stainless steel or aluminum surfaces approved by Hatco. Please contact the factory for applications with other material. *
- All models feature an Anodized Aluminum surface
- Control Box comes standard with a 1219 mm lead wire
- Control Box can be mounted 1219 mm from center of the shelf (CSU models only)
- CSU models offer a long, flexible refrigerant line which allows condensing unit to be pulled out for service
- Condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver (CSU, CSUR models only)

continued on next page...



CSU-48-S
(Undermount)

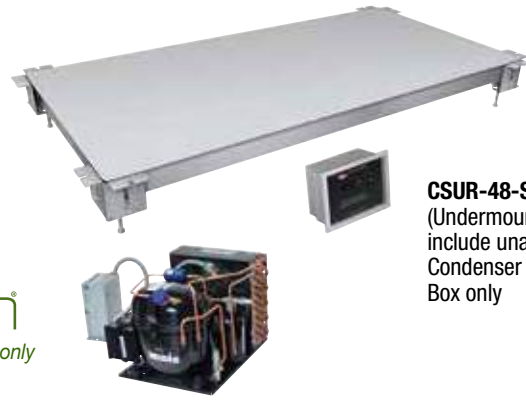

CSUR-48-S
(Undermount) All models include unattached Condenser and Control Box only

COLD SHELVES UNDERMOUNT (Anodized Aluminum)

Model **	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Approx. Ship Weight	List Price
CSU-24-F	694 x 478 mm	610 x 394 mm	54 kg	\$7173
CSU-24-I	694 x 579 mm	610 x 495 mm	53 kg	7204
CSU-24-S	694 x 694 mm	610 x 610 mm	59 kg	7273
CSU-36-F	998 x 478 mm	914 x 394 mm	65 kg	7162
CSU-36-I	998 x 579 mm	914 x 495 mm	64 kg	7174
CSU-36-S	998 x 694 mm	914 x 610 mm	57 kg	8118
CSU-48-F	1303 x 478 mm	1219 x 394 mm	64 kg	7923
CSU-48-I	1303 x 579 mm	1219 x 495 mm	66 kg	7955
CSU-48-S	1303 x 694 mm	1219 x 610 mm	81 kg	8634

* Not available with CE Mark.

Consult factory for refrigerant specifications.

All Cold Shelves Undermount Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Electronic Temperature Control and condensing unit, 1829 mm cord and plug, thermal mastic caulk and single use applicator.

COLD SHELVES UNDERMOUNT (Anodized Aluminum) with UNATTACHED CONDENSER/CONTROL BOX

Model **	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Approx. Ship Weight	List Price
CSUR-24-F	694 x 478 mm	610 x 394 mm	50 kg	\$6326
CSUR-24-I	694 x 579 mm	610 x 495 mm	44 kg	6357
CSUR-24-S	694 x 694 mm	610 x 610 mm	54 kg	6426
CSUR-36-F	998 x 478 mm	914 x 394 mm	54 kg	6315
CSUR-36-I	998 x 579 mm	914 x 495 mm	54 kg	6327
CSUR-36-S	998 x 694 mm	914 x 610 mm	65 kg	7271
CSUR-48-F	1303 x 478 mm	1219 x 394 mm	69 kg	7076
CSUR-48-I	1303 x 579 mm	1219 x 495 mm	65 kg	7108
CSUR-48-S	1303 x 694 mm	1219 x 610 mm	69 kg	7787

* Not available with CE Mark.

Consult factory for refrigerant specifications.

All Cold Shelves Undermount with Unattached Condenser/Control Box Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probe, Control Box and condensing unit (shipped loose), TXV valve (unattached), thermal mastic caulk and single use applicator.

* Make structural modifications or add bracing underneath the countertop to ensure countertop will support the weight of the unit and its contents. For mounting bolt and substrate cutout dimensions, please refer to the Installation section in the Operating Manual which found on the Hatco website, www.hatcocorp.com.

OPTIONS – PAGE 107



CSU and CSUR models include thermal mastic caulk and a single use applicator

Cold Shelves Undermount

continued

- CSUR models have unattached Condensing unit and Control Box, CSUX models have unattached Control Box only
- CSUR and CSUX models have benefit of allowing fabricators the freedom to design.



CSUX-48-S
(Undermount) All models include unattached Control Box only

COLD SHELVES UNDERMOUNT (Anodized Aluminum) with UNATTACHED CONTROL BOX only

Model **	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Watts	Approx. Ship Weight	List Price 220V, 230V, 240V
CSUX-24-F	694 x 478 mm	610 x 394 mm	17	34 kg	\$4947
CSUX-24-I	694 x 579 mm	610 x 495 mm	17	34 kg	4978
CSUX-24-S	694 x 694 mm	610 x 610 mm	17	38 kg	5047
CSUX-36-F	998 x 478 mm	914 x 394 mm	17	41 kg	4936
CSUX-36-I	998 x 579 mm	914 x 495 mm	17	44 kg	4948
CSUX-36-S	998 x 694 mm	914 x 610 mm	17	45 kg	5892
CSUX-48-F	1303 x 478 mm	1219 x 394 mm	17	46 kg	5697
CSUX-48-I	1303 x 579 mm	1219 x 495 mm	17	51 kg	5729
CSUX-48-S	1303 x 694 mm	1219 x 610 mm	17	56 kg	6408

* Not available with CE Mark.

All Cold Shelves Undermount with Unattached Control Box Only Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probe, solenoid valve (attached to shelf), Control Box (shipped loose), TXV valve (unattached).


* Make structural modifications or add bracing underneath the countertop to ensure countertop will support the weight of the unit and its contents. For mounting bolt and substrate cutout dimensions, please refer to the Installation section in the Operating Manual, which found on the Hatco website, www.hatcocorp.com.

OPTIONS (available at time of purchase only)

COND-8.5 2591 mm cord (1524 mm standard), CSU models only

\$14

COLORS AND FINISHES – INSIDE BACK COVER

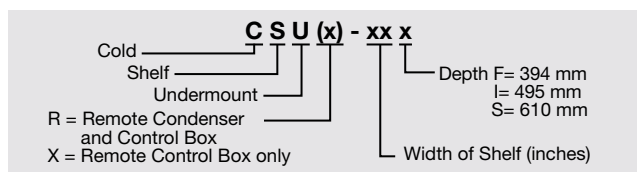

Hot/Cold Simulated Stone Shelves Built-In

Give your operation ultimate flexibility with Hatco's innovative, patented, Hot/Cold Simulated Stone Shelves Built-In. They easily transition between a heated to cold and cold to heated shelf!

- Patented thermal break reduces condensation and temperature transfer on adjacent surfaces
- Shelves change modes from hot to cold or vice versa in as little as 30 minutes, allowing quick change for different dayparts
- All models are bottom mount, flush with the countertop
- Simulated stone is Swanstone®
- All models match the GRSSB Heated Built-In Shelves for a fully integrated look

- Control Box can be mounted 1219 mm from center of shelf (HCSSB models only)
- HCSSB models offer a long, flexible refrigerant line which allows condensing unit to be pulled out for service
- Condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver (HCSSB, HCSSBR models only)
- HCSSBR has unattached Condensing unit and Control Box, HCSSBX has unattached Control Box only



HCSSB-4818
in optional
Bermuda Sand
simulated stone



HCSSBR-4818
in standard Night Sky simulated
stone – All models include
unattached Condenser and
Control Box only



HCSSBX-4818
in optional Gray Granite simulated
stone – All models include
unattached Control Box only

HOT/COLD SIMULATED STONE SHELVES BUILT-IN (flush to countertop)

Model *	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Approx. Ship Weight	List Price
HCSSB-2418	686 x 533 mm	610 x 457 mm	61 kg	\$9151
HCSSB-3018	838 x 533 mm	762 x 457 mm	69 kg	9241
HCSSB-3618	991 x 533 mm	914 x 457 mm	73 kg	9404
HCSSB-4818	1295 x 533 mm	1219 x 457 mm	85 kg	10337

* Not available with CE Mark.

All Hot/Cold Simulated Stone Shelves Built-In Models Feature:

Voltage: 220, 230 or 240 (CE not available). Models Shipped with: Electronic Temperature Control, condensing unit, 1829 mm cord and plug.

HOT/COLD SIMULATED STONE SHELVES BUILT-IN with UNATTACHED CONDENSER/CONTROL BOX

Model *	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Approx. Ship Weight	List Price
HCSSBR-2418	686 x 533 mm	610 x 457 mm	61 kg	\$8304
HCSSBR-3018	838 x 533 mm	762 x 457 mm	69 kg	8394
HCSSBR-3618	991 x 533 mm	914 x 457 mm	73 kg	8557
HCSSBR-4818	1295 x 533 mm	1219 x 457 mm	85 kg	9490

* Not available with CE Mark.

All Hot/Cold Simulated Stone Shelves Built-In with Unattached Condenser/Control Box Models Feature:

Voltage: 220, 230 or 240 (CE not available). Models Shipped with: Shelf assembly with temperature probes, Control Box and condensing unit (shipped loose), unattached TXV valve.


HOT/COLD SIMULATED STONE SHELVES BUILT-IN with UNATTACHED CONTROL BOX only

Model *	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Hot Side Watts 220V, 230V, 240V	Approx. Ship Weight	List Price
HCSSBX-2418	686 x 533 mm	610 x 457 mm	371, 405, 441	45 kg	\$6925
HCSSBX-3018	838 x 533 mm	762 x 457 mm	467, 510, 555	48 kg	7015
HCSSBX-3618	991 x 533 mm	914 x 457 mm	558, 610, 664	54 kg	7178
HCSSBX-4818	1295 x 533 mm	1219 x 457 mm	746, 815, 887	64 kg	8111

* Not available with CE Mark.

All Hot/Cold Simulated Stone Shelves Built-In with Control Box Only Models Feature:

Voltage: 220, 230 or 240 (CE not available). Models Shipped with: Shelf assembly with temperature probes, solenoid valve (attached to shelf), Control Box (shipped loose), TXV valve (unattached).

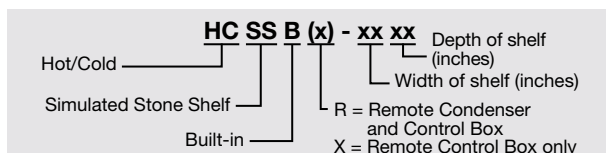

NOTE: Models are not a CE offering, items are sold as components for fabricator self certification.

OPTIONS

(available at time of purchase only)

Simulated stone colors – Non-standard colors are non-returnable Night Sky standard –

SS-GGRAN	Gray Granite	No Charge
SS-BSAND	Bermuda Sand	No Charge
COND-8.5CC	2591 mm conduit (1829 mm standard HCSSB models only)	\$20

COLORS AND FINISHES – INSIDE BACK COVER

COUNTERTOP CUTOUT DIMENSIONS

Model	Width 10 mm radii	Height 10 mm radii
HCSSB(R)(X)-2418	619 mm	467 mm
HCSSB(R)(X)-3018	772 mm	467 mm
HCSSB(R)(X)-3618	924 mm	467 mm
HCSSB(R)(X)-4818	1229 mm	467 mm
Model	Width	Height
Control Box (354 W x 168 mm D)	333 mm	143 mm

ecoization
HCSSB(R) models only

Hot/Cold Simulated Stone Shelves Built-In Flush Top

Give your operation ultimate flexibility with Hatco's innovative, patented Hot/Cold Simulated Stone Shelves Built-in Flush Top. They easily transition between a heated to cold and cold to heated shelf!

- Patented thermal break reduces condensation and temperature transfer on adjacent surfaces
 - Shelves change modes from hot to cold or vice versa in as little as 30 minutes, allowing quick change for different dayparts
 - All units are bottom mount, flush with the countertop
 - Simulated stone is Swanstone®
 - All units match the GRSSBF Heated Built-In Shelves for an integrated look
 - Control Box comes standard with a 1219 mm lead wire
 - Control Box can be mounted 1219 mm from center of shelf (HCSSBF models only)
 - HCSSBF models offer a long, flexible refrigerant line which allows condensing unit to be pulled out for service
 - Condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver (HCSSBF, HCSSBFR models only)
- continued on next page...*



HCSSBF-48-S
in standard Night Sky
simulated stone



HCSSBFR-48-S
in optional Granite Gray
simulated stone – All models
include unattached Condenser
and Control Box only

HOT/COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP

Model *	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Approx. Ship Weight	List Price
HCSSBF-24-F	686 x 470 mm	610 x 394 mm	64 kg	\$ 9095
HCSSBF-24-I	686 x 572 mm	610 x 495 mm	61 kg	9151
HCSSBF-24-S	686 x 686 mm	610 x 610 mm	70 kg	9233
HCSSBF-36-F	991 x 470 mm	914 x 394 mm	75 kg	9370
HCSSBF-36-I	991 x 572 mm	914 x 495 mm	75 kg	9404
HCSSBF-36-S	991 x 686 mm	914 x 610 mm	82 kg	10474
HCSSBF-48-F	1295 x 470 mm	1219 x 394 mm	84 kg	9685
HCSSBF-48-I	1295 x 572 mm	1219 x 495 mm	89 kg	10393
HCSSBF-48-S	1295 x 686 mm	1219 x 610 mm	111 kg	12455

* Not available with CE Mark.

Consult factory for refrigerant specifications.

All Hot/Cold Simulated Stone Shelves Built-In Flush Top Models Feature:

Voltage: Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Electronic Temperature Control and condensing unit, 1829 mm cord and plug.

HOT/COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP with UNATTACHED CONDENSER/CONTROL BOX

Model *	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Approx. Ship Weight	List Price
HCSSBFR-24-F	686 x 470 mm	610 x 394 mm	54 kg	\$ 8248
HCSSBFR-24-I	686 x 572 mm	610 x 495 mm	54 kg	8304
HCSSBFR-24-S	686 x 686 mm	610 x 610 mm	49 kg	8386
HCSSBFR-36-F	991 x 470 mm	914 x 394 mm	73 kg	8523
HCSSBFR-36-I	991 x 572 mm	914 x 495 mm	76 kg	8557
HCSSBFR-36-S	991 x 686 mm	914 x 610 mm	84 kg	9627
HCSSBFR-48-F	1295 x 470 mm	1219 x 394 mm	85 kg	8838
HCSSBFR-48-I	1295 x 572 mm	1219 x 495 mm	89 kg	9546
HCSSBFR-48-S	1295 x 686 mm	1219 x 610 mm	99 kg	11608

* Not available with CE Mark.

Consult factory for refrigerant specifications.

All Hot/Cold Simulated Stone Shelves Built-In Flush Top with Unattached Condenser/Control Box Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probes, Control Box and condensing unit (shipped loose), TXV valve (unattached).

OPTIONS – PAGE 110

Hot/Cold Simulated Stone Shelves Built-In Flush

continued

- HCSSBFR has unattached Condensing unit and Control Box, HCSSBFX has unattached Control Box only
- HCSSBFR and HCSSBFX models have benefit of allowing fabricators the freedom to design



HCSSBFX-48-S
in optional Bermuda Sand simulated stone – All models include unattached Control Box only

HOT/COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP with UNATTACHED CONTROL BOX only

Model *	Overall Shelf Dim. (includes brackets) W x D	Shelf Space W x D	Hot Side Watts 220V, 230V, 240V	Approx. Ship Weight	List Price
HCSSBFX-24-F	686 x 470 mm	610 x 394 mm	325, 355, 387	42 kg	\$ 6869
HCSSBFX-24-I	686 x 572 mm	610 x 495 mm	407, 445, 485	44 kg	6925
HCSSBFX-24-S	686 x 686 mm	610 x 610 mm	503, 550, 599	48 kg	7007
HCSSBFX-36-F	991 x 470 mm	914 x 394 mm	485, 530, 577	52 kg	7144
HCSSBFX-36-I	991 x 572 mm	914 x 495 mm	613, 670, 730	56 kg	7178
HCSSBFX-36-S	991 x 686 mm	914 x 610 mm	755, 825, 898	62 kg	8248
HCSSBFX-48-F	1295 x 470 mm	1219 x 394 mm	650, 710, 773	59 kg	7459
HCSSBFX-48-I	1295 x 572 mm	1219 x 495 mm	814, 890, 969	68 kg	8167
HCSSBFX-48-S	1295 x 686 mm	1219 x 610 mm	1006, 1100, 1198	76 kg	10229

* Not available with CE Mark.

All Hot/Cold Simulated Stone Shelves Built-In Flush Top with Unattached Control Box Only Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probe, solenoid valve (attached to shelf), Control Box (shipped loose) TXV valve (unattached).

NOTE: Models are not a CE offering, items are sold as components for fabricator self certification.

COUNTERTOP CUTOUT DIMENSIONS

Model	Width 10 mm radii	Height 10 mm radii
HCSSBF(R)(X)-24-F	619 mm	403 mm
HCSSBF(R)(X)-24-I	619 mm	505 mm
HCSSBF(R)(X)-24-S	619 mm	619 mm
HCSSBF(R)(X)-36-F	924 mm	403 mm
HCSSBF(R)(X)-36-I	924 mm	505 mm
HCSSBF(R)(X)-36-S	924 mm	619 mm
HCSSBF(R)(X)-48-F	1226 mm	403 mm
HCSSBF(R)(X)-48-I	1226 mm	505 mm
HCSSBF(R)(X)-48-S	1226 mm	619 mm
Model	Width	Height
Control Box (354 W x 168 mm D)	333 mm	143 mm


OPTIONS

(available at time of purchase only)

Simulated stone colors – Non-standard colors are non-returnable Night Sky standard –

SS-GGRAN	Gray Granite	No Charge
SS-BSAND	Bermuda Sand	No Charge
COND-8.5CC	2591 mm conduit (1829 mm standard) HCSSBF models only	\$20

COLORS AND FINISHES – INSIDE BACK COVER

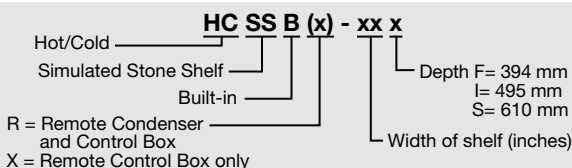

Hot/Cold Shelves Built-In Flush Top

Give your operation ultimate flexibility with Hatco's innovative, patented Hot/Cold Shelves Built-In Flush Top. In our signature Hardcoat Aluminium, they easily transition between a heated to cold and cold to heated shelf!

- Patented thermal break reduces condensation and temperature transfer on adjacent surfaces
- Shelves change modes from hot to cold or vice versa in as little as 30 minutes, allowing quick change for different dayparts
- Units are Hardcoat Aluminum, top mount
- All models match the GRSBF Heated Built-In Shelves for a fully integrated look
- Control comes standard with a 1219 mm lead wire
- Control Box can be mounted 1219 mm from center of shelf (HCSBF models only)
- HCSBF models offer a long, flexible refrigerant line which allows condensing unit to be pulled out for service
- Condensing unit features easy serviceability with sight glass, service valves, dryer/filter and receiver (HCSBF, HCSBFR models only)

continued on next page...



HCSBF-48-S



HCSBFR-48-S All models include unattached Condenser and Control Box only

HOT/COLD SHELVES BUILT-IN FLUSH TOP (Hardcoat Aluminum)

Model *	Overall Shelf Dimensions W x D	Usable Shelf Space W x D	Approximate Ship Weight	List Price
HCSBF-24-F	648 x 432 mm	610 x 394 mm	54 kg	\$ 8831
HCSBF-24-I	648 x 533 mm	610 x 495 mm	58 kg	9030
HCSBF-24-S	648 x 648 mm	610 x 610 mm	64 kg	9230
HCSBF-36-F	953 x 432 mm	914 x 394 mm	71 kg	9266
HCSBF-36-I	953 x 533 mm	914 x 495 mm	69 kg	9369
HCSBF-36-S	953 x 648 mm	914 x 610 mm	68 kg	10208
HCSBF-48-F	1257 x 432 mm	1219 x 394 mm	74 kg	10135
HCSBF-48-I	1257 x 533 mm	1219 x 495 mm	79 kg	10439
HCSBF-48-S	1257 x 648 mm	1219 x 610 mm	96 kg	11370

* Not available with CE Mark.

Consult factory for refrigerant specifications.

All Hot/Cold Shelves Built-In Flush Top Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Electronic Temperature Control, condensing unit, 1829 mm cord and plug.

HOT/COLD SHELVES BUILT-IN FLUSH TOP (Hardcoat Aluminum) with UNATTACHED CONDENSER/CONTROL BOX

Model *	Overall Shelf Dimensions W x D	Usable Shelf Space W x D	Approximate Ship Weight	List Price
HCSBFR-24-F	648 x 432 mm	610 x 394 mm	49 kg	\$ 8153
HCSBFR-24-I	648 x 533 mm	610 x 495 mm	58 kg	8352
HCSBFR-24-S	648 x 648 mm	610 x 610 mm	64 kg	8552
HCSBFR-36-F	953 x 432 mm	914 x 394 mm	71 kg	8588
HCSBFR-36-I	953 x 533 mm	914 x 495 mm	73 kg	8691
HCSBFR-36-S	953 x 648 mm	914 x 610 mm	71 kg	9530
HCSBFR-48-F	1257 x 432 mm	1219 x 394 mm	66 kg	9457
HCSBFR-48-I	1257 x 533 mm	1219 x 495 mm	60 kg	9761
HCSBFR-48-S	1257 x 648 mm	1219 x 610 mm	116 kg	10692

* Not available with CE Mark.

Consult factory for refrigerant specifications.

All Hot/Cold Shelves Built-In Flush Top with Unattached Condenser/Control Box Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probes, Control Box and condensing unit (shipped loose), TXV valve (unattached).

OPTIONS – PAGE 112



Hot/Cold Simulated Stone Shelves Built-In Flush

continued

- HCSBFR models have unattached Condensing unit and Control Box, HCSBFX models have unattached Control Box only
- HCSBFR and HCSBFX models have benefit of allowing fabricators the freedom to design.



HCSBFX-48-S
All models include
unattached Control
Box only

HOT/COLD SHELVES BUILT-IN FLUSH TOP (Hardcoat Aluminum) with UNATTACHED CONTROL BOX only

NOTE: Models are not a CE offering, items are sold as components for fabricator self certification.

Model *	Overall Dimensions W x D	Usable Shelf Space		Hot Side Watts 220V, 230V, 240V	Approx. Ship Weight	List Price
		W x D	W x D			
HCSBFX-24-F	648 x 432 mm	610 x 394 mm		325, 355, 387	34 kg	\$6605
HCSBFX-24-I	648 x 533 mm	610 x 495 mm		407, 445, 485	39 kg	6804
HCSBFX-24-S	648 x 648 mm	610 x 610 mm		503, 550, 599	44 kg	7004
HCSBFX-36-F	953 x 432 mm	914 x 394 mm		485, 530, 577	48 kg	7040
HCSBFX-36-I	953 x 533 mm	914 x 495 mm		613, 670, 730	52 kg	7143
HCSBFX-36-S	953 x 648 mm	914 x 610 mm		755, 825, 898	53 kg	7982
HCSBFX-48-F	1257 x 432 mm	1219 x 394 mm		650, 710, 773	55 kg	7909
HCSBFX-48-I	1257 x 533 mm	1219 x 495 mm		814, 890, 969	60 kg	8213
HCSBFX-48-S	1257 x 648 mm	1219 x 610 mm		1006, 1100, 1198	64 kg	9144

* Not available with CE Mark.

All Hot/Cold Shelves Built-In Flush Top with Unattached Control Box Only Models Feature:

Voltage: 220, 230 or 240 (CE not available).

Models Shipped with: Shelf assembly with temperature probes, solenoid valve (attached to shelf), Control Box (shipped loose), TXV valve (unattached).


OPTIONS (available at time of purchase only)

COND-8.5CC 2591 mm conduit (1829 mm standard), HCSBF models only **\$20**

COLORS AND FINISHES – INSIDE BACK COVER

COUNTERTOP CUTOUT DIMENSIONS

Model	Width		Height	
	Minimum	Maximum	Minimum	Maximum
HCSBF(R)(X)-24-F	625 mm	635 mm	409 mm	419 mm
HCSBF(R)(X)-24-I	625 mm	635 mm	511 mm	521 mm
HCSBF(R)(X)-24-S	625 mm	635 mm	625 mm	635 mm
HCSBF(R)(X)-36-F	930 mm	940 mm	409 mm	419 mm
HCSBF(R)(X)-36-I	930 mm	940 mm	511 mm	521 mm
HCSBF(R)(X)-36-S	930 mm	940 mm	625 mm	635 mm
HCSBF(R)(X)-48-F	1234 mm	1245 mm	409 mm	419 mm
HCSBF(R)(X)-48-I	1234 mm	1245 mm	511 mm	521 mm
HCSBF(R)(X)-48-S	1234 mm	1245 mm	625 mm	635 mm
Model	Width		Height	
Control Box (354 W x 168 mm D)	333 mm		143 mm	

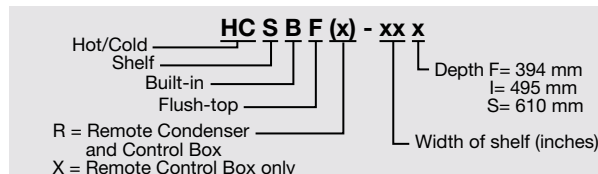

Glo-Ray® Heated Simulated Stone Built-In Rectangular Shelves

Match the heat zone to your countertops with Hatco's Glo-Ray Rectangular Heated Simulated Stone Shelves Built-In. These foodsafe shelves are ideal for buffet lines or hors d'oeuvre displays. These unique warmers will safely hold food hot while blending in with your décor.

- Shelves are made of approved foodsafe materials
- Features a lighted rocker switch and thermostatically-controlled heated base
- Includes remote Control Box with 915 mm conduit and 1829 mm cord and plug
- Models with simulated stone are Swanstone®



Standard Control Box



GRSSB-3618 in optional Bermuda Sand built into a simulated stone countertop

GLO-RAY HEATED SIMULATED STONE BUILT-IN RECTANGULAR SHELVES

Model [^]	Dimensions W x D x H	Watts		Ship Weight	List Price [‡]
		220V-230V	230V-240V		
GRSSB-2418	651 x 498 x 58 mm	534-583	583-635	14 kg	\$2159
GRSSB-3018	803 x 498 x 58 mm	655-716	716-780	20 kg	2246
GRSSB-3618	955 x 498 x 58 mm	782-854	854-930	22 kg	2340
GRSSB-4818	1261 x 498 x 58 mm	1068-1166	1166-1270	23 kg	2650
GRSSB-6018	1565 x 498 x 58 mm	1310-1432	1432-1560	25 kg	3471
GRSSB-7218	1869 x 498 x 58 mm	1564-1708	1708-1860	32 kg	3615

[‡] Available with CE Mark, add \$20.

[^] Recommended for use in a metallic countertop. For other surfaces, verify the material is suitable for temps up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.

All Glo-Ray Heated Simulated Stone Built-In Rectangular Shelves Models Feature:

Cord location: Cord is attached to Control Box.

NOTE: For any size GRSSB, the next larger size GRA or GR2A Strip Heater will fit over the top. For example, a GRSSB-3018 will require a GRA-36 or GR2A-36. The GRA will have a tight fit to the frame of the base. The GR2A will have approximately a 102 mm space.

Be sure to check out our Hot/Cold and Cold only Built-In Shelves for a seamless look

OPTIONS (available at time of purchase only)

Designer Color Bezel (Flush Mount Control Box, Bezel only) – Stainless Steel standard – Non-standard colors are non-returnable –

RED Warm Red	GRAY Gray Granite	NAVY Navy Blue	COPPER Antique Copper	\$46
BLACK Black	WHITE White Granite	GREEN Hunter Green		

Simulated stone color – Non-standard colors are non-returnable – Night Sky standard

SS-GGRAN Gray Granite	SS-BSAND Bermuda Sand	No Charge
-----------------------	-----------------------	-----------

GRSSB-FLUSH-ITC	Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 134 D mm)	\$196
-----------------	---	-------

GRSSB-FLUSH-TSTAT	Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 115 mm D)	No Charge
-------------------	---	-----------

COND-6	1829 mm Conduit (914 mm standard) – used with Flush Mount ITC Control Boxes only	\$45
--------	--	------

COND-10	3048 mm Conduit (914 mm standard) – used with Flush Mount ITC Control Boxes only	86
---------	--	----

GRSSB-REC	Built-In Heated Simulated Stone Shelf with Recessed Top	No Charge
-----------	---	-----------

COLORS AND FINISHES – INSIDE BACK COVER



GRSSB-FLUSH-ITC



GRSSB-FLUSH-TSTAT

GRSSB COUNTERTOP CUTOUT DIMENSIONS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
GRSSB-2418	625 mm	632 mm	473 mm	480 mm
GRSSB-3018	778 mm	784 mm	473 mm	480 mm
GRSSB-3618	930 mm	937 mm	473 mm	480 mm
GRSSB-4818	1235 mm	1241 mm	473 mm	480 mm
GRSSB-6018	1540 mm	1546 mm	473 mm	480 mm
GRSSB-7218	1845 mm	1851 mm	473 mm	480 mm

GRSSB, GRSB OPTIONAL CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
GRS(S)B-FLUSH-ITC	149 mm	162 mm	121 mm
GRS(S)B-FLUSH-TSTAT	149 mm	162 mm	102 mm



Heated Base Glass Built-In Rectangular Shelves

Hatco Built-In Rectangular Heated Base Glass Shelves have a heated ceramic glass top to create uniform heat across the entire surface and are made of approved foodsafe materials. Adjustable thermostatic controls allow surface temperature to be controlled easily.

- Shelves are made of approved foodsafe materials
- Equipped with an attached Stainless Steel trim mounting ring (*Designer Black* or *White*)

- Lighted On/Off rocker switch
- Includes remote Control Box with 915 mm conduit and 1829 mm cord and plug

HBGB-3618 in optional White Glass and Trim Ring



HEATED BASE GLASS BUILT-IN RECTANGULAR SHELVES

Model [^]	Dimensions W x D x H	Watts		Ship Weight	List Price [‡]
		220-230V	230-240V		
HBGB-2418	651 x 498 x 55 mm	420-459	459-500	15 kg	\$2899
HBGB-3018	803 x 498 x 55 mm	525-574	574-625	17 kg	3021
HBGB-3618	955 x 498 x 55 mm	630-689	689-750	18 kg	3150
HBGB-4818 ≈	1260 x 498 x 55 mm	840-918	918-1000	23 kg	3452
HBGB-6018 ≈	1565 x 498 x 55 mm	1050-1148	1148-1250	29 kg	3701
HBGB-7218 ≈	1870 x 498 x 55 mm	1260-1378	1378-1500	34 kg	3949

[^] Recommended for use in a metallic countertop. For other surfaces, verify material is suitable for temperatures up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.

[‡] Available with CE Mark, no added charge.

≈ Units 1219 mm and larger are constructed of two equal size pieces of glass which create a seam.

All Heated Base Glass Built-In Rectangular Shelves Models Feature:

Voltage: 220, 240 single phase.

Conduit: 915 mm.

Cord Location: Cord is attached to Control Box.



Standard Control Box

OPTIONS AND ACCESSORIES – PAGE 115

HEATED BASE GLASS BUILT-IN RECTANGULAR HIGH-WATT SHELVES

Model [^]	Dimensions W x D x H	Volts	Watts	Ship Weight	List Price [‡]
HBGBH-2418	651 x 498 x 67 mm	230	634	13 kg	\$2897
HBGBH-3018	803 x 498 x 67 mm	230	809	15 kg	3006
HBGBH-3618	956 x 498 x 67 mm	230	984	17 kg	3119
HBGBH-4818 ≈	1261 x 498 x 67 mm	230	1268	21 kg	3395
HBGBH-6018 ≈	1565 x 498 x 67 mm	230	1618	25 kg	3613
HBGBH-7218 ≈	1870 x 498 x 67 mm	230	1968	29 kg	3839

[^] Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 125°C. Hatco is not responsible for counter damage caused by heat from the warmer.

[‡] Available with CE Mark, no added charge.

≈ Units 1219 mm and larger are constructed of two equal sized pieces of glass which create a seam.

All Heated Base Glass Shelves Built-In Rectangular High-Watt Models Feature:

Voltage: 230 single phase.

Conduit: 1829 mm.

Cord Location: Cord is attached to Control Box.

OPTIONS AND ACCESSORIES – PAGE 115



Standard HBGBH Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls

HBG B x - xx xx

Heated Base Glass
Built-In
No Character = Standard Watt
H = High watt

Depth of Shelf
(inches)
Width of Shelf (inches)



HBGB-3618 below a
GR2AH-42 Strip Heater
in optional *Designer*
Black and Sneeze
Guards

OPTIONS (available at time of purchase only)

Ceramic Glass Color – Black standard – Non-standard colors are non-returnable

HBGB-GLASS-WHT White

No Charge

Color Bezel (Flush Mount Control Box, Bezel only) – Stainless Steel standard – Non-standard colors are non-returnable –

HBGB-BESEL-BLACK Black

\$46

HBGB-BESEL-WHITE White

46

Trim Ring Color – Stainless Steel standard – Non-standard colors are non-returnable –

HBGB-TRIM-BLK Designer Black

46

HBGB-TRIM-WHITE White

46

HBGBH-NO-TRIM Unit without Trim Ring – HBGBH models only

No Charge

HBGB-FLUSH-ITC Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls – HBGB models only (standard on HBGBH models) (162 W x 198 H x 134 D mm)

196

HBGB-FLUSH-TSTAT Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls – HBGB models only (162 W x 198 H x 115 D mm)

No Charge

COND-6 1829 mm Conduit (914 mm standard) – used with Flush Mount ITC Control Boxes only – HBGB only (standard on HBGBH models)

44

COND-10 3048 mm Conduit (914 mm standard) – used with Flush Mount ITC Control Boxes only

83

HBGB-REC Built-In Heated Base Glass Shelf with Recessed Top – HBGB models only

No Charge

COLORS AND FINISHES – INSIDE BACK COVER



HBGB-FLUSH-ITC



HBGB-FLUSH-TSTAT

HBGB AND HBGBH COUNTERTOP CUTOUT DIMENSIONS

Model	Min. Width	Max. Width	Min. Depth	Max. Depth
HBGB, HBGBH-2418	625 mm	632 mm	473 mm	480 mm
HBGB, HBGBH-3018	778 mm	784 mm	473 mm	480 mm
HBGB, HBGBH-3618	930 mm	937 mm	473 mm	480 mm
HBGB, HBGBH-4818	1235 mm	1241 mm	473 mm	480 mm
HBGB, HBGBH-6018	1540 mm	1546 mm	473 mm	480 mm
HBGB, HBGBH-7218	1845 mm	1851 mm	473 mm	480 mm

HBGB AND GRSB CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
HBGB (GRSB)-FLUSH-ITC	149 mm	162 mm	121 mm
HBGB (GRSB)-FLUSH-TSTAT	149 mm	162 mm	102 mm
HBGBH Standard Box			



Glo-Ray® Heated Shelves Built-In Rectangular with Recessed Top

Hatco's Glo-Ray Heated Shelves Built-In Rectangular with Recessed Top add heat to your serving surface. The 13 mm recessed top foodwarmer has a Hardcoat Aluminum surface and blanket-type element for uniform heat to extend food holding time.

- Uniform heat distribution with Hardcoat Aluminum surface and blanket-type element
- 914 mm flexible conduit channels power lines from the shelf to a control box

- Thermostatically-controlled heated base
- Standard controller includes infinite switch, lighted rocker switch and mounting brackets
- For use in countertops up to 32 mm thick



GRSB-24-I



Standard Control Box

NOTE: For any size GRSB, the next larger size GRA or GR2A Strip Heater will fit over the top. For example, a GRSB-30 will require a GRA-36 or GR2A-36. The GRA will have a tight fit to the frame of the base. The GR2A will have approximately a 102 mm space.

Be sure to check out our
Hot/Cold and Cold only Built-In Shelves
for a seamless look

GLO-RAY HEATED SHELVES BUILT-IN RECTANGULAR WITH RECESSED TOP

Model [^]	Dimensions W x D x H	Cut-Out Dimensions		Watts		Ship Weight	List Price [‡]
		Min.-Max. Width	Min.-Max. Depth	220V [†]	240V [†]		
GRSB-24-F	648 x 432 x 73 mm	622-629 mm	406-413 mm	384	458	11 kg	\$1807
GRSB-24-I	648 x 533 x 73 mm	622-629 mm	508-514 mm	550	550	13 kg	1814
GRSB-24-O	648 x 800 x 73 mm	622-629 mm	775-781 mm	722	860	15 kg	1969
GRSB-30-F	800 x 432 x 73 mm	775-781 mm	406-413 mm	462	550	11 kg	1924
GRSB-30-I	800 x 533 x 73 mm	775-781 mm	508-514 mm	665	665	13 kg	1932
GRSB-30-O	800 x 800 x 73 mm	775-781 mm	775-781 mm	916	985	17 kg	2141
GRSB-36-F	953 x 432 x 73 mm	927-933 mm	406-413 mm	540	642	13 kg	2044
GRSB-36-I	953 x 533 x 73 mm	927-933 mm	508-514 mm	780	780	14 kg	2053
GRSB-36-O	953 x 800 x 73 mm	927-933 mm	775-781 mm	1110	1110	17 kg	2382
GRSB-42-F	1105 x 432 x 73 mm	1080-1086 mm	406-413 mm	627	746	14 kg	2144
GRSB-42-I	1105 x 533 x 73 mm	1080-1086 mm	508-514 mm	885	885	17 kg	2155
GRSB-42-O	1105 x 800 x 73 mm	1080-1086 mm	775-781 mm	1236	1305	21 kg	2614
GRSB-48-F	1257 x 432 x 73 mm	1232-1238 mm	406-413 mm	705	828	15 kg	2258
GRSB-48-I	1257 x 533 x 73 mm	1232-1238 mm	508-514 mm	1000	1000	18 kg	2269
GRSB-48-O	1257 x 800 x 73 mm	1232-1238 mm	775-781 mm	1430	1430	31 kg	2815
GRSB-54-I	1410 x 533 x 73 mm	1384-1391 mm	508-514 mm	1110	1110	18 kg	2380
GRSB-60-F	1562 x 432 x 73 mm	1537-1543 mm	406-413 mm	870	1034	18 kg	2489
GRSB-60-I	1562 x 533 x 73 mm	1537-1543 mm	508-514 mm	1220	1220	20 kg	2500
GRSB-60-O	1562 x 800 x 73 mm	1537-1543 mm	775-781 mm	1750	1750	29 kg	3269
GRSB-66-I	1715 x 533 x 73 mm	1689-1695 mm	508-514 mm	1330	1330	24 kg	2592
GRSB-72-F	1867 x 432 x 73 mm	1842-1848 mm	406-413 mm	1034	1230	20 kg	2688
GRSB-72-I	1867 x 533 x 73 mm	1842-1848 mm	508-514 mm	1440	1440	23 kg	2700
GRSB-72-O	1867 x 800 x 73 mm	1842-1848 mm	775-781 mm	2070	2070	31 kg	3726

[†] Single Phase

[^] Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.

[‡] Available with CE Mark, no added charge, except models GRSB-24-O and -42-O.


All Glo-Ray Heated Shelves Built-In Rectangular with Recessed Top Models Feature:

Voltage: 220 or 240 single phase.

Usable Heated Shelf Space: Width of unit minus 38 mm x depth of unit minus 38 mm.

Cord Location: Cord is attached to Control Box.

OPTIONS AND ACCESSORIES – PAGE 117





GRSB-54-I Heated Shelf
below a **GRAL-96D**
Strip Heater

OPTIONS (available at time of purchase only)

Designer Color Bezel (Flush Mount Control Box, Bezel only) – Stainless Steel standard – Non-standard colors are non-returnable –

\$46

RED	Warm Red
BLACK	Black
GRAY	Gray Granite
WHITE	White Granite
NAVY	Navy Blue
GREEN	Hunter Green
COPPER	Antique Copper

GRSB-FLUSH-ITC Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 134 D mm)

\$194

GRSB-FLUSH-TSTAT Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 115 mm D)

No Charge

COND-6 1829 mm Conduit (914 mm standard) – used with Flush Mount ITC Control Boxes only

\$44

COND-10 3048 mm Conduit (914 mm standard) – used with Flush Mount ITC Control Boxes only

83

ACCESSORIES (available for purchase at any time)

Stainless steel Channel Dividers for GRSB models – Required to keep Rods in place – includes front and back Dividers –

GRSB-CD-24	For GRSB-24 models	\$ 58
GRSB-CD-30	For GRSB-30 models	77
GRSB-CD-36	For GRSB-36 models	97
GRSB-CD-42	For GRSB-42 models	114
GRSB-CD-48	For GRSB-48 models	135
GRSB-CD-54	For GRSB-54 models	154
GRSB-CD-60	For GRSB-60 models	173
GRSB-CD-66	For GRSB-66 models	193
GRSB-CD-72	For GRSB-72 models	213

Stainless steel Divider Rods – sold individually –

GRSB-DIV-F	For F depth units	each \$26
GRSB-DIV-I	For I depth units	each 28
GRSB-DIV-O	For O depth units	each 33

* See page 115 for Control Box cutout dimensions.

FOOD PANS AND TRIVETS – PAGE 189
COLORS AND FINISHES – INSIDE BACK COVER




GRSB-FLUSH-ITC



GRSB-FLUSH-TSTAT

GRSB-72-I with
Channel Dividers
(vertical, with
notches) and
Rods (horizontal)





Glo-Ray® Heated Shelf Built-In Rectangular with Flush Top

Let Hatco add heat to your serving surface with this terrific shelf. This flush top foodwarmer has a Hardcoat Aluminum surface and blanket-type element for uniform heat to extend your food holding time.

- Uniform heat distribution with Hardcoat Aluminum surface and blanket-type element
- 914 mm flexible conduit channels power lines from the shelf to a control box
- Standard controller includes control thermostat, an illuminated power switch and mounting brackets
- For use in countertops up to 32 mm thick

- Thermostatically-controlled heated base
- Model widths from: 648 to 1867 mm
- Optional Stainless Steel surface



GRSBF-60-O

NOTE: For any size GRSBF, the next larger size GRA or GR2A Strip Heater will fit over the top. For example, a GRSBF-30 will require a GRA-36 or GR2A-36. The GRA will have a tight fit to the frame of the base. The GR2A will have approximately a 102 mm space.

GLO-RAY HEATED SHELVES BUILT-IN RECTANGULAR WITH FLUSH TOP

Model [^]	Dimensions W x D x H	Cut-Out Dimensions		Watts		Ship Weight	List Price [†]
		Min.-Max. Width	Min.-Max. Depth	220V*	240V*		
GRSBF-24-F	648 x 432 x 57 mm	622-629 mm	406-413 mm	384	458	13 kg	\$1807
GRSBF-24-I	648 x 533 x 57 mm	622-629 mm	508-514 mm	550	550	12 kg	1814
GRSBF-24-S	648 x 648 x 57 mm	622-629 mm	622-629 mm	640	762	15 kg	1921
GRSBF-24-O	648 x 800 x 57 mm	622-629 mm	775-781 mm	722	860	16 kg	1969
GRSBF-30-F	800 x 432 x 57 mm	775-781 mm	406-413 mm	462	550	11 kg	1924
GRSBF-30-I	800 x 533 x 57 mm	775-781 mm	508-514 mm	665	665	14 kg	1932
GRSBF-30-S	800 x 648 x 57 mm	775-781 mm	622-629 mm	755	898	15 kg	2079
GRSBF-30-O	800 x 800 x 57 mm	775-781 mm	775-781 mm	916	985	17 kg	2141
GRSBF-36-F	953 x 432 x 57 mm	927-933 mm	406-413 mm	540	642	15 kg	2044
GRSBF-36-I	953 x 533 x 57 mm	927-933 mm	508-514 mm	780	780	14 kg	2053
GRSBF-36-S	953 x 648 x 57 mm	927-933 mm	622-629 mm	870	1034	16 kg	2312
GRSBF-36-O	953 x 800 x 57 mm	927-933 mm	775-781 mm	1110	1110	17 kg	2382
GRSBF-42-F	1105 x 432 x 57 mm	1080-1086 mm	406-413 mm	627	746	17 kg	2144
GRSBF-42-I	1105 x 533 x 57 mm	1080-1086 mm	508-514 mm	885	885	15 kg	2155
GRSBF-42-S	1105 x 648 x 57 mm	1080-1086 mm	622-629 mm	1006	1198	18 kg	2531
GRSBF-42-O	1105 x 800 x 57 mm	1080-1086 mm	775-781 mm	1236	1305	22 kg	2614
GRSBF-48-F	1257 x 432 x 57 mm	1232-1238 mm	406-413 mm	705	828	16 kg	2258
GRSBF-48-I	1257 x 533 x 57 mm	1232-1238 mm	508-514 mm	1000	1000	18 kg	2269
GRSBF-48-S	1257 x 648 x 57 mm	1232-1238 mm	622-629 mm	1121	1334	19 kg	2721
GRSBF-48-O	1257 x 800 x 57 mm	1232-1238 mm	775-781 mm	1430	1430	22 kg	2815
GRSBF-54-I	1409 x 533 x 57 mm	1384-1391 mm	508-514 mm	1110	1110	19 kg	2382
GRSBF-60-F	1562 x 432 x 57 mm	1537-1543 mm	406-413 mm	870	1034	19 kg	2489
GRSBF-60-I	1562 x 533 x 57 mm	1537-1543 mm	508-514 mm	1220	1220	22 kg	2500
GRSBF-60-S	1562 x 648 x 57 mm	1537-1543 mm	622-629 mm	1372	1634	25 kg	3180
GRSBF-60-O	1562 x 800 x 57 mm	1537-1543 mm	775-781 mm	1750	1750	29 kg	3269
GRSBF-66-I	1715 x 533 x 57 mm	1689-1695 mm	508-514 mm	1330	1330	23 kg	2599
GRSBF-72-F	1867 x 432 x 57 mm	1842-1848 mm	406-413 mm	1034	1230	20 kg	2688
GRSBF-72-I	1867 x 533 x 57 mm	1842-1848 mm	508-514 mm	1440	1440	24 kg	2700
GRSBF-72-S	1867 x 648 x 57 mm	1842-1848 mm	622-629 mm	1602	1906	27 kg	3580
GRSBF-72-O	1867 x 800 x 57 mm	1842-1848 mm	775-781 mm	2070	2070	31 kg	3726

* Single Phase

[^] Recommended for use in metallic countertop, for other surfaces, verify material is suitable for temperatures up to 93°C. Hatco is not responsible for counter damage caused by heat from the warmer.


[†] Available with CE Mark, no added charge, except models GRSBF-24-O, -30-O and -42-O.

All Glo-Ray Heated Shelves Built-In Rectangular with Flush Top Models Feature:

Usable Heated Shelf Space: Width of unit minus 38 mm x depth of unit minus 38 mm.

Cord Location: Cord is attached to Control Box.

OPTIONS AND ACCESSORIES – PAGE 119

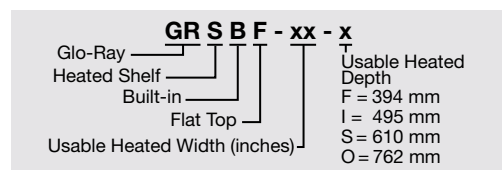

Standard Control Box



GRSBF-60-0 built into a simulated stone countertop with accessory pans, shown below a **GR2AL-96D** Strip Heater in *Designer Black* with optional Sneeze Guards

OPTIONS (available at time of purchase only)

Designer Color Bezel (Flush Mount Control Box, Bezel only) – Stainless Steel standard –

Non-standard colors are non-returnable –

RED Warm Red	GRAY Gray Granite	NAVY Navy Blue	COPPER Antique Copper	\$46
BLACK Black	WHITE White Granite	GREEN Hunter Green		
GRSBF-SS	Stainless Steel surface in lieu of Hardcoat Aluminum (GRSBF models only)			No Charge
GRSBF-FLUSH-ITC	Stainless steel Flush Mount Recessed Electronic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 134 D mm)			\$194
GRSBF-FLUSH-TSTAT	Stainless steel Flush Mount Recessed Thermostatic Control Box with lighted On/Off rocker switch and angled recessed controls (162 W x 198 H x 115 mm D)			No Charge
COND-6	1829 mm Conduit (914 mm standard) – used with Flush Mount ITC Control Boxes only			\$44
COND-10	3048 mm Conduit (914 mm standard) – used with Flush Mount ITC Control Boxes only			83

FOOD PANS AND TRIVETS – PAGE 189
COLORS AND FINISHES – INSIDE BACK COVER



GRSBF-FLUSH-ITC



GRSBF-FLUSH-TSTAT

CONTROL BOX CUTOUT DIMENSIONS

Model	Width	Height	Depth
GRSBF-FLUSH-ITC	149 mm	162 mm	121 mm
GRSBF-FLUSH-TSTAT	149 mm	162 mm	102 mm

Drawer Warmers

*Cafeterias • Convenience Stores
Restaurants & Cafés • Clubs & Bars • Concessions*



HDWTC-2 pg. 121



HDW-2 with optional touchscreen control pg. 122



HDW-1N with optional **HDW-ITC** digital temperature control pg. 122



HDW-1.5R2 with optional touchscreen control
pg. 122



HDW-2B in optional *Designer Warm Red* pg. 123



CDW-3N pg. 125

Heated Drawer Warmers with Top Control

Hatco Drawer Warmers ensure optimal holding of a variety of products at safe temperatures, while minimizing moisture loss and texture change. Our unique blanket element design promotes uniform temperatures throughout the cavity. Each drawer features adjustable sliding vents. Touchscreen controller controls temperature and time for each drawer individually.

- Top-of-the-unit touchscreen controller is positioned at an angle for greater visibility
- Controller allows individual temperature control and hold timer per drawer with both visual and audio alerts
- Robust stainless steel construction inside and out
- Drawer frame is constructed of heavy duty, 12 gauge stainless steel and drawers slide on durable nylon rollers
- Snap out side panels make this unit easy to clean and service
- Easy-to-clean seamless interior core
- Drawer frame can accommodate varying pan configurations, including 1/1 GN, 1/3 GN, up to 152 mm deep, with or without lids
- Pans lift straight up, eliminating the need to tilt pan for removal
- USB port for easy software updates
- Unit comes standard 102 mm plastic legs
- CE versions come with anti-tip bracket and hardware.

HDWTC-2
shown with Accessory
51 mm casters (102 mm
plastic legs are standard)



Model	Dimensions* W x D x H	Voltage	Watts	Ship Weight	List Price
HDWTC-1	622 x 650 x 296 mm	220 / 230 / 240	323 / 353 / 384	55 kg	\$4390
HDWTC-2	622 x 650 x 509 mm	220 / 230 / 240	645 / 704 / 766	81 kg	6342
HDWTC-3	622 x 650 x 722 mm	220 / 230 / 240	966 / 1055 / 1148	99 kg	8325

* Add 35 mm to depth for drawer handle. Height does not include standard 102 mm plastic legs

All Heated Drawer Warmer Top Control models feature:

Models Shipped with: One 152 mm deep food pan per drawer, 102 mm plastic legs, 1829 mm cord and plug.

Cord Location: Top, back-left side, recessed to protect plug.


OPTIONS (available at time of purchase only - not available on Quick-Ship)

OS-PAN	Oversized Drawer Frame and Pan (508 x 381 x 127 mm) in lieu of standard Drawer with Pan	per drawer \$153
---------------	---	-------------------------

ACCESSORIES (available for purchase at any time)

HDW-TRIVET	Custom trivet raises food product 13 mm off bottom of full size pan (445 x 242 x 13 mm)	\$ 67
HDW 6" LEG	152 mm adjustable stainless steel Legs	209
HDW-CASTER-2	51 mm Dia. Casters – all swivel, 2 lock – adds 64 mm to height of unit	256
HDW-CASTER-3	76 mm Dia. Locking Casters – all swivel, all lock – adds 108 mm to height of unit	256
HDW-CASTER-5	127 mm Dia. Locking Casters – all swivel, all lock – adds 159 mm to height of unit	307

FOOD PANS AND TRIVETS – PAGE 189





July 1, 2022

Export Price List

Freestanding Drawer Warmers

Hold everything from meat to vegetables to rolls in the Hatco Drawer Warmers. Built for tough kitchen duty with rugged construction and heavy-duty hardware, these warmers keep a variety of foods hot and fresh until served.

- Standard and narrow widths
- 1-, 2-, 3- or 4-drawer freestanding models
- Completely insulated individual cavities provide maximum energy efficiency (excludes HDW-1R2, -2R2)
- 12-gauge stainless steel heavy-duty drawer slides with nylon rollers
- Each drawer has a recessed individual thermostatic control, temperature monitor, vent slides and power switch

- Standard width Drawer Warmer pans lift straight out of drawer (Narrow and Split models require slight tilting of pan)
- Each drawer of the HDW-1R2, 1.5R2, -2R2 will accommodate one half-size sheet pan
- Anti-tip bracket and hardware or deck mount legs included

HDW-2 with optional touchscreen control and Accessory 152 mm stainless steel legs



Drawer Temperature
Temperature Adjustment
Drawer Timer



HDW-2N



HDW-1.5R2
with optional
touchscreen control



HDW-1R2



HDW-2R2

FREESTANDING DRAWER WARMERS

Model	Dimensions+	Voltage	Watts	Ship Weight	List Price+	
	W x D x H	Single Phase		Includes weight of pans	w/pans	w/o pans
Standard						
HDW-1	750 x 575 x 279 mm	220, 240	450	44 kg	\$2910	\$2860
HDW-2	750 x 575 x 537 mm	220, 240	900	76 kg	4912	4812
HDW-3	750 x 575 x 794 mm	220, 240	1350	105 kg	6919	6769
HDW-4	750 x 575 x 1051 mm	220, 240	1800	135 kg	9120	8920
Narrow						
HDW-1N	530 x 686 x 280 mm	220, 240	450	38 kg	2910	2860
HDW-2N	530 x 686 x 537 mm	220, 240	900	76 kg	4912	4812
HDW-3N	530 x 686 x 794 mm	220, 240	1350	105 kg	6919	6769

* Add 32 mm to depth for drawer handle. Height does not include standard 102 mm plastic legs

* 220V, 240V available with CE Mark. Add \$40 for one drawer, \$70 for two drawer, \$100 for three drawer, \$130 for four drawer models.

Not available with optional digital temperature control.

All Freestanding Drawer Warmer models feature:

Models w/Pans Shipped with: One 152 mm deep food pan per drawer.

HDW-1, -2 and -3 and all Narrow Models Shipped with: 102 mm plastic legs, 1829 mm cord and plug.

HDW-4 Shipped with: 152 mm stainless steel legs, 1829 mm cord and plug.

Cord Location: Back of unit, lower left corner.

SPLIT DRAWER WARMERS

Model	Dimensions* W x D x H	Voltage Single Phase	Watts	Ship Weight Includes weight of pans	List Price*	
					w/pans	w/o pans
HDW-1R2	746 x 419 x 392 mm	230	634	41 kg	\$4190	\$4140
HDW-1.5R2	733 x 419 x 494 mm	230	909	53 kg	5949	5874
HDW-2R2	746 x 419 x 508 mm	230	1185	61 kg	6530	6430

* Add 32 mm to depth for drawer handle. Height does not include standard 102 mm plastic legs

* 230V available with CE Mark. Add \$40 for one drawer, \$70 for two drawer models.

All Split Drawer Warmer models feature:

Plug: BS-1363, 7/7 Schuko, AS-3112.

HDW-1R2 shipped with pans: Two 527 x 324 x 64 mm food pans, 102 mm legs, 1829 mm cord and plug.



HDW-1.5R2 shipped with pans: Three 527 x 324 x 64 mm food pans, 102 mm legs, 1829 mm cord and plug.

HDW-2R2 shipped with pans: Four 527 x 324 x 64 mm food pans, 102 mm legs, 1829 mm cord and plug.

Pan Capacity: 527 x 324 x 64 mm.

Cord Location: Back of unit, lower left corner.

OPTIONS AND ACCESSORIES – PAGE 124

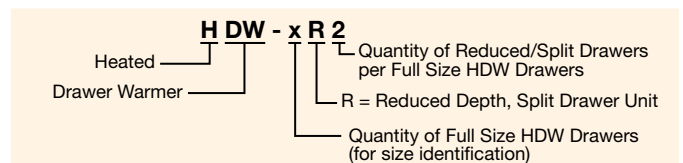

Built-In Drawer Warmers

Hold everything from meat to vegetables to rolls in Hatco Drawer Warmers. Built for tough kitchen duty with rugged construction and heavy-duty hardware, these warmers keep a variety of foods hot and fresh until served.

- Standard and narrow widths
- 1-, 2- or 3-drawer built-in models
- Completely insulated individual cavities provide maximum energy efficiency
- 12-gauge stainless steel heavy-duty drawer slides with nylon rollers
- Each drawer has a recessed individual thermostatic control, temperature monitor, vent slides and power switch
- Standard width Drawer Warmer pans lift straight out of drawer (HDW-1BN, -2BN and -3BN models require tipping the pan to install)



HDW-3B



HDW-2B

BUILT-IN DRAWER WARMERS

Model	Dimensions ⁺	Voltage	Watts	Ship Weight	List Price [‡]	
	W x D x H	Single Phase		Includes weight of pans	w/pans	w/o pans
Standard						
HDW-1B	715 x 568 x 248 mm	220, 240	450	40 kg	\$2801	\$2751
HDW-2B	715 x 568 x 506 mm	220, 240	900	72 kg	4707	4607
HDW-3B	715 x 568 x 763 mm	220, 240	1350	105 kg	6611	6461
Narrow						
HDW-1BN	494 x 679 x 248 mm	220, 240	450	40 kg	2801	2751
HDW-2BN	494 x 679 x 506 mm	220, 240	900	72 kg	4707	4607
HDW-3BN	494 x 679 x 763 mm	220, 240	1350	101 kg	6611	6461

† Available with CE Mark. Add \$40 for one drawer, \$70 for two drawer, \$100 for three drawer models.

* Add 32 mm to depth for drawer handle. Width and height excludes front mounting flange.

All Built-In Drawer Warmer models feature:

Voltage: 220 or 240.


Models w/Pans Shipped with: One 152 mm deep food pan per drawer, and 1219 mm flexible conduit.

OPTIONS AND ACCESSORIES – PAGE 124

BUILT-IN CUTOUT REQUIREMENTS

Model	Width	Depth▼	Height
HDW-1B	720 mm	610 mm	257 mm
HDW-2B	720 mm	610 mm	514 mm
HDW-3B	720 mm	610 mm	771 mm
HDW-1BN	500 mm	720 mm	257 mm
HDW-2BN	500 mm	720 mm	514 mm
HDW-3BN	500 mm	720 mm	771 mm

▼ Depth includes 38 mm for conduit connector.





OPTIONS (available at time of purchase only)

Designer Drawer Front colors per drawer (not available for HDW-1R2, -1.5R2, -2R2 models)

Non-standard colors are non-returnable – Stainless Steel standard


RED	Warm Red	\$ 75
BLACK	Black	75
GRAY	Gray Granite	75
WHITE	White Granite	75
NAVY	Navy Blue	75
GREEN	Hunter Green	75
COPPER	Antique Copper	75
HDW-TTC	Temperature Control Timer – 6-channel control touchscreen display	672
OS-PAN	Oversized Drawer Frame and Pan – 508 x 381 x 127 mm – in lieu of standard Drawer with Pan (standard width models only)	per drawer 153
BIS DRAWER	Biscuit Pan Drawer accommodates two 457 x 330 mm Half-Size Sheet Pans (not included) in lieu of standard Drawer with Pan (standard width models only)	No Charge
HDW-CHIP	Chip Guard	per drawer 50
RD-NOVENT	No drawer vents (HDW-1R2, -1.5R2, -2R2 only)	No Charge

ACCESSORIES (available for purchase at any time)

HDW-TRIVET	Custom Trivet 445 x 242 x 13 mm, raises food product 13 mm off bottom of full-size pan	\$ 67
HDW 6" LEG	152 mm Adjustable stainless steel Legs (standard on HDW-4) (excludes HDW-1R2, -1.5R2, -2R2)	209
HDW-CASTER-2	51 mm diameter casters – all swivel, 2 lock – adds 57 mm to height of unit, HDW-1, -2, -3 models only (excludes HDW-1R2, -1.5R2, -2R2)	256
HDW-CASTER-3	76 mm diameter Locking Casters – all swivel, all lock – adds 108 mm to height of unit, HDW-1, -2, -3 models only (excludes HDW-1R2, -1.5R2, -2R2)	256
HDW-CASTER-5	127 mm diameter Locking Casters – all swivel, all lock – adds 159 mm to height of unit (Excludes HDW-1R2, -1.5R2, -2R2)	307
HDW-SPILL	Water/Spillage Pan – one per drawer (excludes HDW-1R2, -1.5R2, -2R2 and BIS Drawer and OS-Pan Options)	291
HDW-SPLASH	Splash Baffle – one per drawer (excludes HDW-1R2, -1.5R2, -2R2 and BIS Drawer and OS-Pan Options)	61

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER

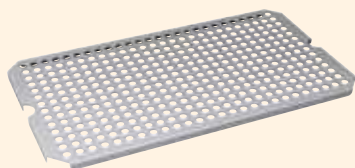


HDW-TRIVET Accessory



Casters - Accessory
HDW-CASTER-2 all swivel, 2 lock
HDW-CASTER-3 all swivel, all lock
HDW-CASTER-5 all swivel, all lock



HDW 6" LEG Accessory



HDW-SPLASH Accessory




HDW-TTC option

Shown: Temperature adjustment and timer touchscreen control (TTC)




Biscuit Pan Drawer (pans not included)
BIS DRAWER option



Additional Humidity

- A. Stainless steel Food Pan
- B. Splash Baffle
HDW-SPLASH Accessory
- C. Water/Spillage Pan – add 6 mm of water, **HDW-SPILL** Accessory



Prevents chips from reaching the element

- D. Heat Shield (included)
- E. Heating Element (included)
- F. Chip Guard **HDW-CHIP** option (standard width shown)

Convected Drawer Warmer

This drawer warmer is designed to keep a variety of food products hot and flavor-fresh until served. With a single non-humidified cavity and a single electronic temperature control, this unit provides even, dry heat for food products that do not require humidity. With insulated top, sides and back, they provide excellent energy efficiency.

- Digital electronic controller for easy programming
- Low velocity convected air system provides even temperature throughout the cabinet
- Tough, solid chrome handles are angled to avoid contact from passing carts
- Narrow width fits most kitchen footprints
- Heavy-duty drawer slides with nylon rollers
- Includes three full-size pans
- Provides even, dry heat for food products that do not require humidity
- Anti-tip bracket and hardware or deck mount legs included



CDW-3N

CONVECTED DRAWER WARMER

Model	Dimensions* W x D x H	Voltage Single Phase	Watts	Ship Weight	List Price†
CDW-3N	420 x 713 x 698 mm	230	933	81 kg	\$5715

† Available with CE Mark, at no added charge.

* Add 32 mm to depth for drawer handle. Height does not include standard casters, which add 57 mm to height.


All Convected Drawer Warmer models feature:

Voltage: 230, single phase.

Models Shipped with: One 152 mm deep food pan per drawer, low profile 51 mm diameter casters, 1829 mm cord and plug.

Cord Location: Back of unit, top right corner.

FOOD PANS AND TRIVETS – PAGE 189



Merchandisers

*Cafeterias • Convenience Stores
Supermarkets & Delis • Restaurants & Cafés
Clubs & Bars • Catering • Concessions*



GRSDS-36D Dual slant shelf *pg. 129*



GR2SDS-48D with standard *Designer Black* inset panels and corner caps *pg. 131*



HXMS-36D in standard *Designer Black* *pg. 133*



GRCMW-1 and **GRCMW-1D** in optional *Bermuda Sand Simulated Stone* color *pg. 136*



GRCD-2PD in optional *Designer Warm Red* with flip-up doors *pg. 137*



GRHD-4PD with optional double side opening and accessory food pans *pg. 139*

Glo-Ray® Pizza Warmer

Convenient for self-serve and quick-serve areas. The Hatco Glo-Ray® Pizza Warmer with base heat only holds boxed or bagged pizzas. Available in three shelf configurations to showcase food in an easy pass-through display.

- Box stop doubles as the sign holder, a standard feature (signs not included)
- Ideal for holding boxed products for high volume applications like stadiums, schools, convenience stores and amusement parks
- Constructed of aluminum and stainless steel with tempered glass side panels
- Separate power switch for each thermostatically-controlled shelf
- Incandescent lights with bright annealed reflectors illuminate the holding areas



GRPWS-2424T in optional *Designer Black*



GRPWS-4824T with base heat only (signs not included)

SLANT DISPLAY WARMERS – TRIPLE SHELF

Model	No. of Bulbs	Dimensions W x D x H (Height includes legs)	Usable Heated Shelf Space W x D	Voltage single phase	Watts	Ship Weight	List Price [†]
GRPWS-2424T	6	607 x 663 x 781 mm	573 x 605 mm	220-230-240	1276-1395-1518	53 kg	\$6067
GRPWS-3624T	9	911 x 663 x 781 mm	878 x 605 mm	220-230-240	1800-1967-2143	76 kg	7207
GRPWS-4824T	12	1216 x 663 x 781 mm	1183 x 605 mm	220-230-240	2301-2515-2738	103 kg	8142

[†] CE Mark not available.

All Slant Models Feature:

Cord Location: Control side at right base corner.

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Stainless Steel standard –

RED	Warm Red	\$460
BLACK	Black	460
GRAY	Gray Granite	460
WHITE	White Granite	460
NAVY	Navy Blue	460
GREEN	Hunter Green	460
COPPER	Antique Copper	460

LED Lights in lieu of Standard Display Lights – Dual and Triple Shelf models only

LED-WW-24	Warm White LED lighting for 24" width models	No Charge
LED-WW-36	Warm White LED lighting for 36" width models	No Charge
LED-WW-48	Warm White LED lighting for 48" width models	No Charge



COLORS AND FINISHES – INSIDE BACK COVER

RECOMMENDED SIGN DIMENSIONS

GRPWS-2424T: 565 x 60 x 3 mm

GRPWS-3624T: 870 x 60 x 3 mm

GRPWS-4824T: 1175 x 60 x 3 mm



Glo-Ray® Merchandising Warmers

Designed with both a slanted and horizontal shelf, Glo-Ray® Merchandising Warmers offer the convenience of customer self-serve with the efficiency of preparing and holding product in advance for peak serving periods.

- These models feature low watt overhead heat.
- Warmer includes a slant and horizontal shelf for merchandising a variety of products like popcorn on the top shelf and nachos, boxed pizza or wrapped food on the bottom
- Standard Indicating Temperature Control (ITC) enhances accuracy and provides digital readout of temperatures
- Thermostatically-controlled hardcoated

- heated base to extend holding times
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Product divider rods and 102 mm legs included
- Shatter-resistant incandescent lights illuminate the holding areas and emphasize the product



GRSDS/H-36D with lower slant and upper horizontal shelf. Shown with optional 381 mm clearance - standard clearance is 305 mm.

SLANT/HORIZONTAL DISPLAY WARMERS – DUAL SHELVES

Model	No. of Bulbs, Divider Rods	Dimensions W x D x H	Voltage single phase	Watts	Ship Weight	List Price [‡]
GRSDS/H-36D	4, 14	914 x 616 x 851 mm	220, 240	1669-1900	72 kg	\$7318
GRSDS/H-41D	6, 16	1041 x 616 x 851 mm	220, 240	1951-2325	83 kg	7827

[‡] Available with CE Mark, at no added charge.

All Slant/Horizontal Shelf Models Feature:

Cord Location: Server side, bottom right corner.

OPTIONS (available at time of purchase only)


Designer Colors – Non-standard colors are non-returnable – Glossy Gray standard –

RED	Warm Red	\$460
BLACK	Black	460
GRAY	Gray Granite	460
WHITE	White Granite	460
NAVY	Navy Blue	460
GREEN	Hunter Green	460
COPPER	Antique Copper	460
15SPACE	381 mm clearance for top shelf in lieu of standard 305 mm (add 76 mm to height of unit)	\$134

ACCESSORIES (available for purchase at any time)

GRSDS-DIV	Additional Stainless Steel Divider Rods (Bottom shelf only)	each \$27
GRSDH-DIV	Additional Stainless Steel Divider Rods (Top shelf only)	each 27

COLORS AND FINISHES – INSIDE BACK COVER

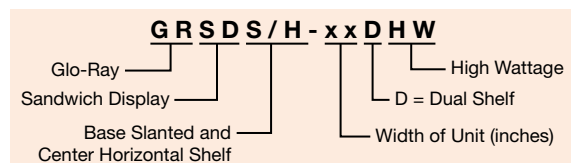

Glo-Ray® Merchandising Warmers

Designed specifically for showcasing wrapped or boxed product, the Hatco Glo-Ray® Merchandising Warmers hold hot food safely at proper serving temperatures. These warmers offer the convenience of self-serve and the efficiency of kitchen-to-server holding.

- Available in single- or two-tier models
- Horizontal or slant shelves
- Product divider rods sort food displays
- Thermostatically-controlled hardcoated heated base, with a temperature range of 85° - 93°C, to extend holding times

- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Shatter-resistant incandescent lights illuminate the holding areas and emphasize the product



GRSDS-30
with accessory
102 mm legs



GRSDH-30D

HORIZONTAL MERCHANDISING WARMERS

Model	No. of Bulbs, Divider Rods	Dimensions W x D x H (Height includes legs)	Usable Heated Shelf Space (W x D)	Voltage	Watts	Ship Weight	List Price*
Single Shelf							
GRSDH-24	2, 5	610 x 495 x 303 mm	577 x 419 mm	220, 240V	724-861	22 kg	\$3097
GRSDH-30	2, 6	762 x 495 x 303 mm	730 x 419 mm	220, 240V	890-1060	25 kg	3374
GRSDH-36	2, 7	914 x 495 x 303 mm	882 x 419 mm	220, 240V	1074-1278	30 kg	3651
GRSDH-41	3, 8	1041 x 495 x 379 mm	1009 x 419 mm	220, 240V	1228-1464	34 kg	3973
GRSDH-52	4, 10	1321 x 495 x 379 mm	1289 x 419 mm	220, 240V	1604-1912	39 kg	4631
GRSDH-60	5, 12	1524 x 495 x 379 mm	1492 x 419 mm	220, 240V	1830-2180	60 kg	5212
Dual Shelf							
GRSDH-24D	4, 10	610 x 495 x 303 mm	577 x 419 mm	220, 240V	1448-1722	40 kg	\$5402
GRSDH-30D	4, 12	762 x 495 x 643 mm	730 x 419 mm	220, 240V	1780-2120	45 kg	5602
GRSDH-36D	4, 14	914 x 495 x 643 mm	882 x 419 mm	220, 240V	2148-2556	54 kg	5928
GRSDH-41D	6, 16	1041 x 495 x 643 mm	1009 x 419 mm	220, 240V	2456-2928	62 kg	6296
GRSDH-52D*	8, 20	1321 x 495 x 643 mm	1289 x 419 mm	220, 240V	3208-3824	78 kg	7248
GRSDH-60D*	10, 24	1524 x 495 x 643 mm	1492 x 419 mm	220, 240V	3660-4360	89 kg	7985

SLANT MERCHANDISING WARMERS

Model	No. of Bulbs, Divider Rods	Dimensions W x D x H (Height includes legs)	Usable Heated Shelf Space (W x D)	Voltage	Watts	Ship Weight	List Price*
Single Shelf							
GRSDS-24	2, 5	610 x 616 x 469 mm	572 x 533 mm	220, 240V	629-749	36 kg	\$3717
GRSDS-30	2, 6	762 x 616 x 469 mm	724 x 533 mm	220, 240V	730-870	36 kg	3983
GRSDS-36	2, 7	914 x 616 x 545 mm	876 x 533 mm	220, 240V	864-1030	42 kg	4287
GRSDS-41	3, 8	1041 x 616 x 545 mm	1003 x 533 mm	220, 240V	1003-1195	44 kg	4598
GRSDS-52	4, 10	1321 x 616 x 545 mm	1283 x 533 mm	220, 240V	1275-1520	50 kg	5271
GRSDS-60	5, 12	1524 x 616 x 545 mm	1486 x 533 mm	220, 240V	1665-1715	76 kg	5691
Dual Shelf							
GRSDS-24D	4, 10	610 x 616 x 820 mm	572 x 533 mm	220, 240V	1260-1502	52 kg	\$5788
GRSDS-30D	4, 12	762 x 616 x 820 mm	724 x 533 mm	220, 240V	1419-1690	64 kg	6139
GRSDS-36D	4, 14	914 x 616 x 820 mm	876 x 533 mm	220, 240V	1669-1990	73 kg	6537
GRSDS-41D	6, 16	1041 x 616 x 820 mm	1003 x 533 mm	220, 240V	1951-2325	82 kg	7026
GRSDS-52D	8, 20	1321 x 616 x 820 mm	1283 x 533 mm	220, 240V	2483-2960	98 kg	8155
GRSDS-60D*	10, 24	1524 x 616 x 820 mm	1486 x 533 mm	220, 240V	3240-3340	108 kg	8660

* Available with CE Mark, at no added charge.


* Cord without plug on 240V.

All Merchandising Warmer Models Feature:

Cord Location: GRSDH Models: Server side, bottom left corner.

GRSDS Models: Server side bottom right corner.

OPTIONS AND ACCESSORIES – PAGE 130

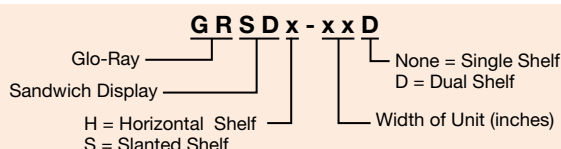



Two GRSDH-36D with dual horizontal shelves

OPTIONS (available at time of purchase only)

ITC-S	Indicating Temperature Control (LED) for single shelf	\$335
ITC-D	Indicating Temperature Control (LED) for dual shelf	578
SSEND	Stainless Steel End Panels in lieu of Glass End Panels	per shelf 46
Sneeze Guard 127 mm on Customer side (GRSDS one side GRSDH two sides) –		
GRSD24BP	610 mm wide models	per shelf \$ 89
GRSD30BP	762 mm wide models	per shelf 89
GRSD36BP	914 mm wide models	per shelf 107
GRSD41BP	1041 mm wide models	per shelf 107
GRSD52BP	1321 mm wide models	per shelf 124
GRSD60BP	1524 mm wide models	per shelf 124
GRSDFLIPLOCK1	Flip-Up Door Locking Plate for GRSDS-xx, -xxD models 24 to 41	per shelf \$20
GRSDFLIPLOCK2	Flip-Up Door Locking Plates for GRSDS-xx, -xxD models 52 to 60	per shelf 45

Display Sign Holder (Signs not included) – Color matches unit color – Top or intermediate Shelf –

GRSD-SIGN24	610 mm width. Requires 575 W x 100 H x 2 D mm Sign	each \$140
GRSD-SIGN30	762 mm width. Requires 727 W x 100 H x 2 D mm Sign	each 145
GRSD-SIGN36	914 mm width. Requires 879 W x 100 H x 2 D mm Sign	each 152
GRSD-SIGN41	1041 mm width. Requires 1006 W x 100 H x 2 D mm Sign	each 158
GRSD-SIGN52	1321 mm width. Requires 1286 W x 100 H x 2 D mm Sign	each 171
GRSD-SIGN60	1524 mm width. Requires 1489 W x 100 H x 2 D mm Sign	each 186

Plexi-Glass Flip-up doors on one side for GRSDS models – Not compatible with optional Sneeze

Guards or Display Sign Holders in same opening –

SDS24FLIP	610 mm wide models	per shelf \$278
SDS30FLIP	762 mm wide models	per shelf 278
SDS36FLIP	914 mm wide models	per shelf 278
SDS41FLIP	1041 mm wide models	per shelf 278

Plexi-Glass flip-up doors on one side for GRSDH models – Not compatible with optional sneeze guards or display sign holders in same opening –

GRSDH24FLIP	610 mm wide models	per shelf \$278
GRSDH30FLIP	762 mm wide models	per shelf 278
GRSDH36FLIP	914 mm wide models	per shelf 278
GRSDH41FLIP	1041 mm wide models	per shelf 278

ACCESSORIES (available for purchase at any time)

4"LEGS	102 mm Adjustable Legs (standard on units GRSDH-41 and larger, GRSDS-36 and larger, and all duals)	Set of 4 \$60
Chef LED Bulbs – 230V adjustable bulb – See page 45 for more information – bulbs must be rotated down –		
CLED-2700-230	Chef LED Bulb (Similar to warm incandescent)	each \$129
CLED-3000-230	Chef LED Bulb (similar to warm Halogen light)	each 129
CLED-4000-230	Chef LED Bulb (similar to cool Fluorescent light)	each 129
GRSDH-DIV	Additional Stainless Steel Divider Rod – Horizontal model	each \$27
GRSDS-DIV	Additional Stainless Steel Divider Rod – Slant model	each 27

COLORS AND FINISHES – INSIDE BACK COVER

OPTIONS

(available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Glossy Gray standard –

RED	Warm Red	\$460
BLACK	Black	460
GRAY	Gray Granite	460
WHITE	White Granite	460
NAVY	Navy Blue	460
GREEN	Hunter Green	460
COPPER	Antique Copper	460



SDS24FLIP Accessory shown with brackets for retrofit



CLED -2700, -3000 or -4000 Accessory

Glo-Ray® Designer Merchandising Warmers

Boost impulse sales by showcasing your hot foods in the Hatco Glo-Ray® Designer Merchandising Warmers. Designed specifically for displaying wrapped or boxed product, these warmers hold hot food safely at proper serving temperatures.

- Constructed of aluminum and stainless steel with tempered glass end panels
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Available in single- or two-tier models
- Horizontal or slant shelves
- Product divider rods sort food displays
- Thermostatically-controlled hardcoated heated base extends holding times

- Shatter-resistant incandescent lights illuminate the holding areas and emphasize the product



NOTE: Designer Series width dimensions are 159 mm greater than the number listed in model.

GR2SDH-30 with optional *Designer* Black inset panels and accessory flip-up plexi-glass door

DESIGNER HORIZONTAL DISPLAY WARMERS

Model*	No. of Bulbs, Divider Rods	Dimensions W x D x H <i>(Height includes legs)</i>	Voltage <i>single phase</i>	Watts		Ship Weight	List Price [‡]
				220V	240V		
Single Shelf							
GR2SDH-24	2, 5	768 x 686 x 459 mm	220, 240V	800	820	40 kg	\$4101
GR2SDH-30	2, 6	921 x 686 x 459 mm	220, 240V	1000	1020	55 kg	4412
GR2SDH-36	2, 7	1073 x 686 x 459 mm	220, 240V	1200	1220	59 kg	4731
GR2SDH-42	4, 8	1226 x 686 x 459 mm	220, 240V	1450	1490	63 kg	5243
GR2SDH-48	4, 9	1378 x 686 x 459 mm	220, 240V	1650	1690	73 kg	5758
GR2SDH-54	4, 10	1530 x 686 x 459 mm	220, 240V	1850	1890	78 kg	6284
GR2SDH-60	6, 12	1683 x 686 x 459 mm	220, 240V	2150	2210	85 kg	6764
Dual Shelf							
GR2SDH-24D	4, 10	768 x 686 x 737 mm	220, 240V	1600	1640	57 kg	\$ 6760
GR2SDH-30D	4, 12	921 x 686 x 737 mm	220, 240V	2000	2040	72 kg	7149
GR2SDH-36D	4, 14	1073 x 686 x 737 mm	220, 240V	2400	2440	93 kg	7516
GR2SDH-42D	8, 16	1226 x 686 x 737 mm)	220, 240V	2900	2980	102 kg	8227
GR2SDH-48D*	8, 18	1378 x 686 x 737 mm	220, 240V	3300	3380	115 kg	8928
GR2SDH-54D**	8, 20	1530 x 686 x 737 mm	220, 240V	3700	3780	124 kg	9651
GR2SDH-60D**	12, 24	1683 x 686 x 737 mm	220, 240V	4300	4420	149 kg	10336

DESIGNER SLANT DISPLAY WARMERS

Model*	No. of Bulbs, Divider Rods	Dimensions W x D x H <i>(Height includes legs)</i>	Voltage <i>single phase</i>	Watts		Ship Weight	List Price [‡]
				220V	240V		
Single Shelf							
GR2SDS-24	2, 5	768 x 680 x 579 mm	220, 240V	800	820	47 kg	\$4426
GR2SDS-30	2, 6	921 x 680 x 579 mm	220, 240V	1000	1020	50 kg	4670
GR2SDS-36	2, 7	1073 x 680 x 579 mm	220, 240V	1200	1220	62 kg	5076
GR2SDS-42	4, 8	1226 x 680 x 579 mm	220, 240V	1450	1490	70 kg	5586
GR2SDS-48	4, 9	1378 x 680 x 579 mm	220, 240V	1650	1690	74 kg	6088
GR2SDS-54	4, 10	1530 x 680 x 579 mm	220, 240V	1850	1890	83 kg	6601
GR2SDS-60	6, 12	1683 x 680 x 579 mm	220, 240V	2150	2210	92 kg	7069
Dual Shelf							
GR2SDS-24D	4, 10	768 x 680 x 860 mm	220, 240V	1600	1640	74 kg	\$ 6881
GR2SDS-30D	4, 12	921 x 680 x 860 mm	220, 240V	2000	2040	84 kg	7364
GR2SDS-36D	4, 14	1073 x 680 x 860 mm	220, 240V	2400	2440	91 kg	7825
GR2SDS-42D	8, 16	1226 x 680 x 860 mm	220, 240V	2900	2980	99 kg	8549
GR2SDS-48D*	8, 18	1378 x 680 x 860 mm	220, 240V	3300	3380	116 kg	9248
GR2SDS-54D**	8, 20	1530 x 680 x 860 mm	220, 240V	3700	3780	120 kg	9966
GR2SDS-60D**	12, 24	1683 x 680 x 860 mm	220, 240V	4300	4420	135 kg	10652

* When no color is specified, color inset panels and corner caps will be Black. Non-standard colors are non-returnable.

† Available with CE Mark, at no added charge.

* Cord without plug on 240V.

* Cord without plug on 220V.

All Designer Models Feature:


Usable Heated Shelf Space: All GR2SDH Models: Width of unit minus 162 x 559 D mm.

GR2SDS Single Models: Width of unit minus 162 x 559 D mm.

GR2SDS Dual Models: Width of unit minus 162 x 559 D mm.

Cord Location: Server side, bottom center.

OPTIONS AND ACCESSORIES – PAGE 132

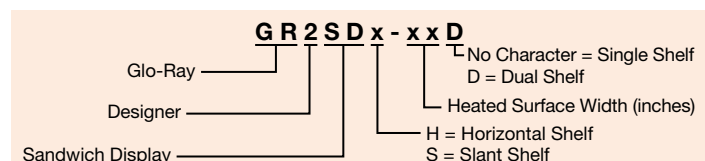



GR2SDS-24D with optional
Designer Warm Red inset
panels

FSDT-1 with
accessory food pans

OPTIONS (available at time of purchase only)

127 mm Sneeze Guard (Customer side only on Slant models) –

GR2SD24BP	768 mm wide models	per shelf	\$124
GR2SD30BP	921 mm wide models	per shelf	155
GR2SD36BP	1073 mm wide models	per shelf	186
GR2SD42BP	1226 mm wide models	per shelf	217
GR2SD48BP	1378 mm wide models	per shelf	248
GR2SD54BP	1530 mm wide models	per shelf	279
GR2SD60BP	1683 mm wide models	per shelf	310

Flip-up Doors on Front or Back –

2SDS24FLIP	768 mm wide models	per shelf	\$207
2SDS30FLIP	921 mm wide models	per shelf	237
2SDS36FLIP	1073 mm wide models	per shelf	270
2SDS42FLIP	1226 mm wide models	per shelf	306

Split Flip-up Doors on Front or Back –

2SDS48FLIP	1378 mm wide models	per shelf	\$359
2SDS54FLIP	1530 mm wide models	per shelf	417
2SDS60FLIP	1683 mm wide models	per shelf	479

2SDHFRTGLS	Front Glass in lieu of Channel Dividers and Divider Rods. Cannot have Sneeze Guards or Flip-Up Doors (GR2SDH series, single models only)		\$113
------------	--	--	-------

2SDHFRTGLS-D	Front Glass in lieu of Channel Dividers and Divider Rods. Cannot have Sneeze Guards or Flip-Up Doors (GR2SDH series, dual models only)		226
--------------	--	--	-----

SS-ITC	Indicating Temperature Control (LED) single shelf (adds 48 mm to Horizontal model depth and 45 mm to Slant model depth)		335
--------	---	--	-----

DS-ITC	Indicating Temperature Control (LED) dual shelf (adds 48 mm to Horizontal model depth and 45 mm to Slant model depth)		578
--------	---	--	-----

ACCESSORIES (available for purchase at any time)


2SD-DIV	Additional Stainless Steel Divider Rods	each	\$27
---------	---	------	------

Chef LED Bulbs – 230V adjustable bulb – See page 45 for more information – bulbs must be rotated down –

CLED-2700-230	Chef LED Bulb (Similar to warm incandescent)	each	\$129
CLED-3000-230	Chef LED Bulb (similar to warm Halogen light)	each	129
CLED-4000-230	Chef LED Bulb (similar to cool Fluorescent light)	each	129

COLORS AND FINISHES – INSIDE BACK COVER

CLED-2700, -3000 or
-4000 Accessory



OPTIONS (available at time of purchase only)

Designer Colors –

Non-standard colors are non-returnable –

Clear Anodized Aluminum standard –

RED	Warm Red	\$460
BLACK	Black	460
GRAY	Gray Granite	460
WHITE	White Granite	460
NAVY	Navy Blue	460
GREEN	Hunter Green	460
COPPER	Antique Copper	460

Designer Inset Panel Colors – Black standard –

RED	Warm Red	No Charge
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge

Designer Corner Caps – Black Standard –

DKGRAY	Dark Gray Corner Caps	No Charge
--------	-----------------------	-----------



SS-ITC Optional



DS-ITC Optional

Heated LED Merchandisers



The new Heated Merchandiser with LED lighting is sleekly designed to safely hold hot packaged food to attract your grab-and-go customers. Available in slant or horizontal shelves, the Heated LED Merchandising Warmers are offered in both single and dual shelf models.

- Choose from slant or horizontal, single or dual shelf models
- Infrared heat safely holds hot packaged product for hours
- High efficiency LED lighting creates better illumination of food product in the holding area
- Feature a thermostatically-controlled hardcoated heated base shelf
- Hinged glass side panels are held in place magnetically and swing out for easy cleaning
- An optional Indicating Temperature Control (ITC) enhances accurate control of temperature



HXMS-36D in standard *Designer Black*

HORIZONTAL HEATED LED MERCHANDISERS

Model	Divider Rods	Dimensions (W x D x H) <i>Height includes legs</i>	Heated Shelf Space (W x D x H)	Voltage	Watts	Amps	Ship Weight*	List Price*
Horizontal Single Shelf								
HXMH-24	5	709 x 725 x 555 mm	567 x 552 mm	230V	671	2.9	55 kg	\$4643
HXMH-30	6	861 x 725 x 555 mm	720 x 552 mm	230V	863	3.8	60 kg	4974
HXMH-36	7	1013 x 725 x 555 mm	872 x 552 mm	230V	1055	4.6	66 kg	5303
HXMH-42	8	1166 x 725 x 555 mm	1025 x 552 mm	230V	1201	5.2	73 kg	5843
HXMH-48	9	1318 x 725 x 555 mm	1177 x 552 mm	230V	1392	6.1	86 kg	6384
HXMH-54	10	1471 x 725 x 555 mm	1329 x 552 mm	230V	1585	6.9	91 kg	6924
HXMH-60	12	1623 x 725 x 555 mm	1482 x 552 mm	230V	1777	7.7	94 kg	7419
Horizontal Dual Shelf								
HXMH-24D	10	709 x 725 x 835 mm	567 x 552 mm	230V	1342	5.8	73 kg	\$ 7501
HXMH-30D	12	861 x 725 x 835 mm	720 x 552 mm	230V	1726	7.5	84 kg	8014
HXMH-36D	14	1013 x 725 x 835 mm	872 x 552 mm	230V	2110	9.2	93 kg	8377
HXMH-42D	16	1166 x 725 x 835 mm	1025 x 552 mm	230V	2402	10.4	100 kg	9131
HXMH-48D	18	1318 x 725 x 835 mm	1177 x 552 mm	230V	2784	12.1	111 kg	9864
HXMH-54D	20	1471 x 725 x 835 mm	1329 x 552 mm	230V	3170	13.8	123 kg	10610
HXMH-60D	24	1623 x 725 x 835 mm	1482 x 552 mm	230V	3554	15.5	136 kg	11299

SLANT HEATED LED MERCHANDISERS

Model	Divider Rods	Dimensions (W x D x H) <i>Height includes legs</i>	Heated Shelf Space (W x D x H)	Voltage	Watts	Amps	Ship Weight*	List Price*
Slant Single Shelf								
HXMS-24	5	709 x 715 x 551 mm	567 x 552 mm	230V	671	2.9	51 kg	\$4829
HXMS-30	6	861 x 715 x 551 mm	720 x 552 mm	230V	863	3.8	60 kg	5091
HXMS-36	7	1013 x 715 x 551 mm	872 x 552 mm	230V	1055	4.6	68 kg	5529
HXMS-42	8	1166 x 715 x 551 mm	1025 x 552 mm	230V	1201	5.2	73 kg	6074
HXMS-48	9	1318 x 715 x 551 mm	1177 x 552 mm	230V	1392	6.1	85 kg	6617
HXMS-54**	10	1471 x 715 x 551 mm	1329 x 552 mm	230V	1585	6.9	93 kg	7170
HXMS-60***	12	1623 x 715 x 551 mm	1482 x 552 mm	230V	1777	7.7	93 kg	7677
Slant Dual Shelf								
HXMS-24D	10	709 x 715 x 831 mm	567 x 552 mm	230V	1342	5.8	73 kg	\$ 7501
HXMS-30D	12	861 x 715 x 831 mm	720 x 552 mm	230V	1726	7.5	85 kg	8014
HXMS-36D	14	1013 x 715 x 831 mm	872 x 552 mm	230V	2110	9.2	94 kg	8488
HXMS-42D	16	1166 x 715 x 831 mm	1025 x 552 mm	230V	2402	10.4	105 kg	9264
HXMS-48D	18	1318 x 715 x 831 mm	1177 x 552 mm	230V	2784	12.1	111 kg	10025
HXMS-54D**	20	1471 x 715 x 831 mm	1329 x 552 mm	230V	3170	13.8	123 kg	10798
HXMS-60D***	24	1623 x 715 x 831 mm	1482 x 552 mm	230V	3554	15.5	132 kg	11534

* Available with CE Mark, at no added charge.

* Shipping weights are approximate.


** Cord - BS plug not available

*** Cord - BS & AS plug not available

All Heated LED Merchandising Warmer Models Feature:

Cord Location: Server side, bottom center on left side of control box.

OPTIONS AND ACCESSORIES – PAGE 134

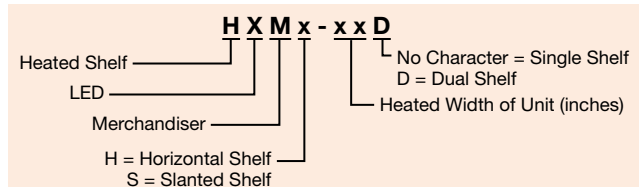


HXMS-48D in standard *Designer Black* with optional LED accent lighting in support posts

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Black standard –

RED	Warm Red	\$460
GRAY	Gray Granite	460
WHITE	White Granite	460
NAVY	Navy Blue	460
GREEN	Hunter Green	460
COPPER	Antique Copper	460

HZM-LP	Red LED Accent Lighting in support post	\$700
SS-ITC	Indicating Temperature Control (LED) for single shelf	335
DS-ITC	Indicating Temperature Control (LED) for dual shelf	578

Sneeze Guards – Not compatible with flip-up doors in same opening –

HZM24BP	127 mm Sneeze Guard on Customer side on -24 models	per shelf \$257
HZM30BP	127 mm Sneeze Guard on Customer side on -30 models	per shelf 280
HZM36BP	127 mm Sneeze Guard on Customer side on -36 models	per shelf 303
HZM42BP	127 mm Sneeze Guard on Customer side on -42 models	per shelf 334
HZM48BP	127 mm Sneeze Guard on Customer side on -48 models	per shelf 364
HZM54BP	127 mm Sneeze Guard on Customer side on -54 models	per shelf 396
HZM60BP	127 mm Sneeze Guard on Customer side on -60 models	per shelf 428

Flip-Up Doors – Not compatible with Sneeze-guards in same opening, one side only –

HZM24FLIP	Plexi-Glass Flip-Up Doors on Control or Customer side on -24 models	per shelf \$258
HZM30FLIP	Plexi-Glass Flip-Up Doors on Control or Customer side on -30 models	per shelf 280
HZM36FLIP	Plexi-Glass Flip-Up Doors on Control or Customer side on -36 models	per shelf 305
HZM42FLIP	Plexi-Glass Flip-Up Doors on Control or Customer side on -42 models	per shelf 333
HZM48FLIP	Plexi-Glass Flip-Up Doors on Control or Customer side on -48 models	per shelf 362
HZM54FLIP	Plexi-Glass Flip-Up Doors on Control or Customer side on -54 models	per shelf 396
HZM60FLIP	Plexi-Glass Flip-Up Doors on Control or Customer side on -60 models	per shelf 432

ACCESSORIES (available for purchase at any time)

HZM-DIV	Additional Stainless Steel Divider Rods	each \$29
----------------	---	------------------

COLORS AND FINISHES – INSIDE BACK COVER

Glo-Ray® Heated Glass Merchandisers

Glo-Ray® Heated Glass Merchandising Warmers are perfect for self-serve operations, designed specifically to hold hot wrapped or boxed product at optimum serving temperatures. Increasing holding capacities and impulse sales with a beautiful curved design that compliments any décor.

- Unique, patented heated glass shelves with infinite controls conduct heat to food product above and below
- Blanket-style heating elements in the hardcoated base and canopy are thermostatically-controlled
- LED lighting allows for optimum food product display with energy savings
- Attractive curved top design includes a built-in front sign holder (sign not included)
- Also comes with: tempered glass side panels, 2.5" (64 mm) legs, thermostatically-controlled heated base and upper canopy, divider rods and comes standard in *Designer Black*



GR3SDS-39DCT in standard *Designer Black* and top sign holder (sign not included)



GR3SDS-39TCT in optional Gray Granite and shelf sign holders. Top sign holder is standard (signs not included)

HEATED GLASS MERCHANDISERS

Model†	No. of Rods	Dimensions W x D x H (Height included legs)	Usable Heated Shelf Space W x D	Voltage	Watts	Amps	Ship Weight	List Price
Dual Shelf								
GR3SDS-39DCT	14	995 x 698 x 673 mm	895 x 540 mm	220-230-240	1750-1910-2080	8.0-8.3-8.7	84 kg	\$ 9219
Triple Shelf								
GR3SDS-39TCT**	21	995 x 698 x 882 mm	895 x 540 mm	220-230-240	2720-2970-3235	12.4-12.9-13.5	104 kg	12105

† Available with CE Mark, at no added charge.

** Not available with BS plug.

All Heated Glass Merchandiser Models Feature:

Cord Location: Server side, bottom right corner.

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Black standard –

RED	Warm Red	\$460
GRAY	Gray Granite	460
WHITE	White Granite	460
NAVY	Navy Blue	460
GREEN	Hunter Green	460
COPPER	Antique Copper	460


Gloss Finish – Non-standard colors are non-returnable – Black standard –

GGRAY	Glossy Gray	\$460
--------------	-------------	--------------

ACCESSORIES (available for purchase at any time)

4"LEGS	102 mm Adjustable Legs	Set of 4 \$60
3SD-DIV	Additional Stainless Steel Divider Rods (not compatible with optional Shelf Sign Holders)	each 27

COLORS AND FINISHES – INSIDE BACK COVER

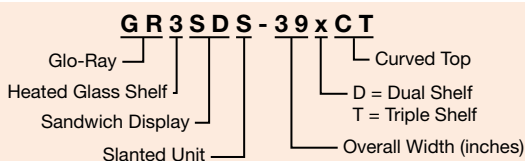

Glo-Ray® Curved Merchandising Warmers

Looking to add a touch of class to a new point-of-sale area or to change or upgrade an existing area? Hatco's Glo-Ray® Curved Merchandising Warmer offers a unique and attractive solution for impulse sales areas.

- Single shelf and dual shelf units come standard with mirrored glass back panel
- Individual thermostatically-controlled heated base with master rocker switch maintains safe serving temperatures
- Halogen lighting allows for optimal food product display



GRCMW-1 in standard *Designer*
Black with food pans (not available)



GRCMW-1DH in standard *Designer*
Black with food pans (not available)

- Humidified dual shelf unit contains a five cup capacity water reservoir
- Models with simulated stone are Swanstone®

CURVED MERCHANDISING WARMER

Model‡	Dimensions W x D x H	Voltage	Usable Heated Surface Space (W x D)		Watts	Ship Weight	List Price‡
Single Shelf							
GRCMW-1	562 x 545 x 505 mm	220, 240	Top Shelf —	Bottom Shelf 501 x 330 mm	619-670	25 kg	\$3509
Dual Shelf							
GRCMW-1D	660 x 511 x 683 mm	220, 240	577 x 314 mm	577 x 396 mm	1294-1540	42 kg	6680
Dual Shelf with Humidity – humidity on bottom shelf only							
GRCMW-1DH	660 x 511 x 683 mm	220, 240	577 x 314 mm	577 x 396 mm	1395-1660	45 kg	7143

† Available with CE Mark, at no added charge.

All Models Feature:

Water Reservoir Capacity (GRCMW-1DH model only): 1.2 liters.

Cord Location: Server side, bottom right corner.

WATER QUALITY REQUIREMENTS – PAGE 190

OPTIONS (available at time of purchase only)

Designer Colors (Unit's painted surface) – Non-standard colors are non-returnable – Black standard –

RED	Warm Red	No Charge
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge

Simulated Stone Colors (Unit's painted surface and decorative trim inserts) –

Non-standard colors are non-returnable –


GGRAN	Gray Granite	\$609
BSAND	Bermuda Sand	609
NSKY	Night Sky	609

CMWDBACKFLIP	Top and bottom shelf Flip-Up doors on Server's side in lieu of Mirrored Back Panel (GRCMW-1D, -1DH models only)	\$ 41
---------------------	---	--------------

CMWDTOPFLIP	Top shelf Flip-up Door on Customer side in lieu of Sneeze Guard (GRCMW-1D, -1DH models only)	206
--------------------	--	------------

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER

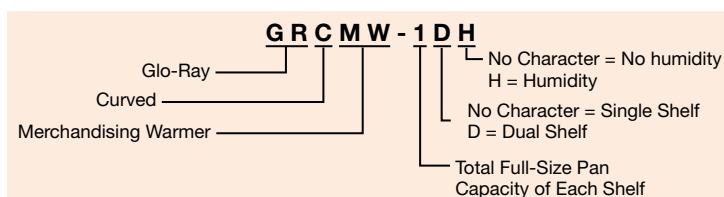

Glo-Ray® Designer Heated Display Cases

Our *Designer* series Glo-Ray® Heated Display Case with curved glass and incandescent lighting will display your offering with flare and elegance. We combine our thermostatically-controlled heated base and infrared overhead heating, to blanket your offering at the perfect temperature.

- The tempered curved glass design offers a great line of sight to draw in your customers
- Exclusive cool base construction
- Rollerless sliding doors
- Available with or without controlled humidity (bottom shelf only)
- Constructed of aluminum and stainless steel with tempered glass
- Curved glass front tilts forward for easy cleaning
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Shatter-resistant incandescent lights illuminate the food product



GRCDH-1PD with pan skirt and new optional flip-up doors and accessory food pans (top baking dish not available)



GRCDH-2PD with optional pan skirt *Designer* Hunter Green and flip-up doors, and accessory food pans



Humidified reservoir is located in between pans



GRCDH-3PD shown in standard Stainless Steel with accessory food pans

DESIGNER DISPLAY CASE

Model	No. of Bulbs	Dimensions W x D x H (Height includes legs)	Usable Heated Shelf Space (W x D)	Voltage single phase	Watts	Ship Weight	List Price [‡]
Single Shelf							
GRCDH-1P	2	524 x 660 x 610 mm	460 x 533 mm	220, 240	405-425	43 kg	\$5267
GRCDH-2P	3	826 x 660 x 610 mm	762 x 533 mm	220, 240	710-780	55 kg	6013
GRCDH-3P	3	1156 x 660 x 610 mm	1092 x 533 mm	220, 240	915-1005	69 kg	6762
Dual Shelf							
GRCDH-1PD	4	524 x 660 x 806 mm	460 x 533 mm	220, 240	907-905	45 kg	\$6149
GRCDH-2PD	6	826 x 660 x 806 mm	762 x 533 mm	220, 240	1080-1285	77 kg	7003
GRCDH-3PD	6	1156 x 660 x 806 mm	1092 x 533 mm	220, 240	1434-1710	95 kg	8068
Single Shelf with Humidity							
GRCDH-1P	2	524 x 660 x 610 mm	460 x 533 mm	220, 240	634-697	41 kg	\$6014
GRCDH-2P	3	826 x 660 x 610 mm	762 x 533 mm	220, 240	939-1052	56 kg	6763
GRCDH-3P	3	1156 x 660 x 610 mm	1092 x 533 mm	220, 240	1145-1277	71 kg	7512
Dual Shelf with Humidity[★]							
GRCDH-1PD	4	524 x 660 x 806 mm	460 x 533 mm	220, 240	1136-1177	55 kg	\$6897
GRCDH-2PD	6	826 x 660 x 806 mm	762 x 533 mm	220, 240	1309-1557	79 kg	7753
GRCDH-3PD	6	1156 x 660 x 806 mm	1092 x 533 mm	220, 240	1666-1982	100 kg	8818

[‡] Available with CE Mark. Add \$40 for GRCDH single shelf models. Add \$80 for GRCDH single shelf models and GRCDH dual shelf models. Add \$120 for GRCDH dual shelf models.

[★] Humidity on bottom shelf only. Includes pan skirt on bottom shelf. Pan skirts accommodate 64 mm H pans.


All Models Feature:

Water Reservoir Capacity (Humidified models only): 3 liters.

Cord Location: Server side, bottom right corner.

OPTIONS – PAGE 138

WATER QUALITY REQUIREMENTS – PAGE 190

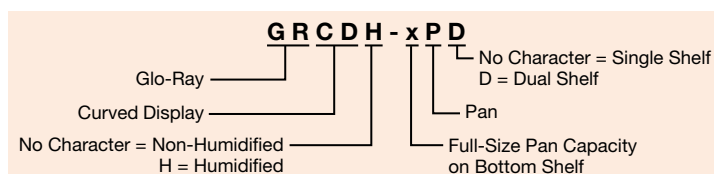



GRCD-2PD with optional flip-up doors and DesignerWarm Red

OPTIONS (available at time of purchase only)

Self-Closing Flip-up Doors on both shelves on Customer side in lieu of Glass Front
(Adds 13 mm depth to unit) –

CD1PDFLIP	1-Pan models	\$ 830
CD2PDFLIP	2-Pan models	889
CD3PDFLIP	3-Pan models	1568

Pan Skirt on bottom shelf
(accommodates 64 mm D pans – standard on humidified models) –

SKIRT-1P	1-Pan model in lieu of Pan Rail	\$ 57
SKIRT-2P	2-Pan model in lieu of Pan Rail	103
SKIRT-3P	3-Pan model in lieu of Pan Rail	147
UPPERSKIRT-2P	Pan Skirt for upper shelf of 2-Pan models	\$105
UPPERSKIRT-3P	Pan Skirt for upper shelf of 3-Pan models	210

Mirrored Glass Doors in lieu of Glass Doors (Server side only) –

Single Shelf Models –

MIRROR-1P	1-Pan single model	\$ 90
MIRROR-2P	2-Pan single model	125
MIRROR-3P	3-Pan single model	160

Dual Shelf Models –

MIRROR-1PD	1-Pan dual model	\$180
MIRROR-2PD	2-Pan dual model	250
MIRROR-3PD	3-Pan dual model	362

OPTIONS (available at time of purchase only)

Designer Colors –
Non-standard colors are non-returnable –

Stainless Steel standard –		
RED	Warm Red	\$460
BLACK	Black	460
GRAY	Gray Granite	460
WHITE	White Granite	460
NAVY	Navy Blue	460
GREEN	Hunter Green	460
COPPER	Antique Copper	460

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER

HEATED DISPLAY CASE MAXIMUM PAN CAPACITIES[□]

Model	Pan Capacity	Optional Pan Skirt Frames
GRCD-1P	1 Full-Size Pan	one SKIRT-1P
GRCD-2P	2 Full-Size Pans	one SKIRT-2P
GRCD-3P	3 Full-Size Pans	one SKIRT-3P
GRCD-1PD	Top Shelf: 1 Half-Size Pan or 1-356 mm Pizza Pan Bottom Shelf: 1 Full-Size Pan	None one SKIRT-1P
GRCD-2PD	Top Shelf: 1 Full-Size Pan and 1 Third-Size Pan or 2-356 mm Pizza Pans Bottom Shelf: 2 Full-Size Pans	one UPPERSKIRT-2P one SKIRT-2P
GRCD-3PD	Top Shelf: 2 Full-Size Pans or 3-356 mm Pizza Pans Bottom Shelf: 3 Full-Size Pans	one UPPERSKIRT-3P one SKIRT-3P

[□] All pan capacities shown are for non-humidified models. 64 mm deep pans recommended for bottom shelf of humidified models.

Glo-Ray® Heated Display Cases

Designed for “show and sell” areas in any foodservice operation, the Hatco Glo-Ray® Heated Display is perfect for hot food merchandising. Top and bottom heat combine to keep all food at that “just-made” taste and temperature longer.

- Thermostatically-controlled heated base 38° - 93°C to extend holding times
- Pre-focused infrared top heat directs heat to the outer edges where heat loss is greatest
- Constructed of aluminum and stainless steel with tempered glass
- Shatter-resistant incandescent lights illuminate the food product
- Exclusive cool base construction minimizes heat transfer, keeping exterior base cool
- Rollerless sliding doors



GRHD-4PD with optional *Designer* Antique Copper and mirrored glass doors and accessory food pans



GRHDH-2P with standard pan skirt, optional double side opening and accessory food pans

DISPLAY CASES

Model	No. of Bulbs	Dimensions W x D x H (Height includes legs)	Usable Heated Shelf Space (W x D)	Voltage single phase	Watts	Ship Weight	List Price*
Single Shelf							
GRHD-2P	4	826 x 660 x 635 mm	712 x 546 mm	220, 240	1035-940	54 kg	\$4488
GRHD-3P	5	1156 x 660 x 635 mm	1042 x 546 mm	220, 240	1463-1350	65 kg	5129
GRHD-4P	6	1486 x 660 x 635 mm	1372 x 546 mm	220, 240	1930-1785	98 kg	6053
Dual Shelf							
GRHD-2PD	6	826 x 660 x 762 mm	712 x 546 mm	220, 240	1223-1310	68 kg	\$6174
GRHD-3PD	8	1156 x 660 x 762 mm	1042 x 546 mm	220, 240	1603-1755	86 kg	6930
GRHD-4PD	8	1486 x 660 x 762 mm	1372 x 546 mm	220, 240	2288-2480	104 kg	7959
Single Shelf with Humidity							
GRHDH-2P	4	826 x 660 x 635 mm	712 x 546 mm	220, 240	1179-1212	57 kg	\$5246
GRHDH-3P	5	1156 x 660 x 635 mm	1042 x 546 mm	220, 240	1584-1622	74 kg	5887
GRHDH-4P	6	1486 x 660 x 635 mm	1372 x 546 mm	220, 240	2253-2329	98 kg	7348
Dual Shelf with Humidity*							
GRHDH-2PD	6	826 x 660 x 762 mm	712 x 546 mm	220, 240	1532-1582	80 kg	\$6925
GRHDH-3PD	8	1156 x 660 x 762 mm	1042 x 546 mm	220, 240	1962-2027	85 kg	7681
GRHDH-4PD	8	1486 x 660 x 762 mm	1372 x 546 mm	220, 240	2941-3024	109 kg	9250

* Available with CE Mark. Add \$40 for GRHD single shelf models.

Add \$80 for GRHDH single shelf models and GRHD dual shelf models. Add \$120 for GRHDH dual shelf models.

* Humidity on bottom shelf only. Includes pan skirt on bottom shelf. Pan skirts accommodate 64 mm H pans.

All Models Feature:

Water Reservoir Capacity: 2-Pan and 3-Pan Humidified Models: 3 liters.


4-Pan Humidified Models: 6 liters.

Doors: Separate rollerless sliding door per shelf.

Cord Location: Server side, bottom right corner.

OPTIONS – PAGE 140

WATER QUALITY REQUIREMENTS – PAGE 190

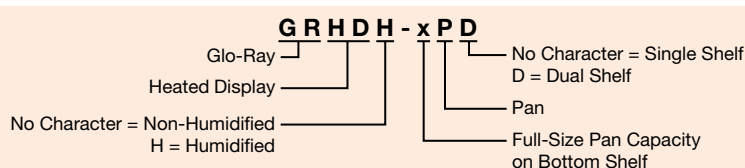



GRHD-4PD with optional pan skirts
Top shelf: one **UPPERSKIRT-4P**
Bottom shelf: one **SKIRT-4P**

OPTIONS (available at time of purchase only)

Pan Skirt for 64 mm D pans on bottom shelf (standard on humidified models) –		
SKIRT-2P	2-Pan model in lieu of Pan Rail	\$105
SKIRT-3P	3-Pan model in lieu of Pan Rail (consists of one SKIRT-1P and one SKIRT-2P)	147
SKIRT-4P	4-Pan Model in lieu of Pan Rail (consists of two SKIRT-2P)	210
Pan Skirt for upper shelf, in lieu of Pan Stop –		
UPPERSKIRT-2P	2-Pan models	\$105
UPPERSKIRT-3P	3-Pan models	210
UPPERSKIRT-4P	4-Pan models	210
FLIP	Flip-Up Doors on Control side in lieu of Glass Sliding Doors	No Charge
Sliding Door in lieu of Fixed Glass customer panel –		
SLIDE-2P	Per opening	\$218
SLIDE-3P	Per opening	240
SLIDE-4P	Per opening	299
Flip-up Door in lieu of Fixed Glass customer panel –		
FLIP-2P	Per opening	\$218
FLIP-3P	Per opening	240
FLIP-4P	Per opening	299
Mirror Glass Sliding Door in lieu of Glass Sliding Door (server side only) –		
MIRROR-2P	Per opening	\$125
MIRROR-3P	Per opening	160
MIRROR-4P	Per opening	198

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Stainless Steel standard –

RED	Warm Red	\$460
BLACK	Black	460
GRAY	Gray Granite	460
WHITE	White Granite	460
NAVY	Navy Blue	460
GREEN	Hunter Green	460
COPPER	Antique Copper	460

FOOD PANS AND TRIVETS – PAGE 189
COLORS AND FINISHES – INSIDE BACK COVER

HEATED DISPLAY CASE MAXIMUM PAN CAPACITIES[□]

Model	Pan Capacity	Optional Pan Skirt Frames
GRHD-2P	2 Full-Size Pans	One SKIRT-2P
GRHD-3P	3 Full-Size Pans	One SKIRT-1P and one SKIRT-2P
GRHD-4P	4 Full-Size Pans	Two SKIRT-2P
GRHD-2PD	Top Shelf 2 Half-Size Pans or 2, 356 mm Pizza Pans	One SKIRT-1P
	Bottom Shelf 2 Full-Size Pans	One SKIRT-2P
GRHD-3PD	Top Shelf 3 Half-Size Pans or 3, 356 mm Pizza Pans	One SKIRT-1P
	Bottom Shelf 3 Full-Size Pans	One SKIRT-1P and one SKIRT-2P
GRHD-4PD	Top Shelf 2 Full-Size Pans or 4 Half-Size Pans or 4, 356 mm Pizza Pans	One UPPERSKIRT-4P
	Bottom Shelf 4 Full-Size Pans	Two SKIRT-2P

[□] All pan capacities shown are for non-humidified models. 64 mm deep pans recommended for bottom shelf of humidified models.

Holding & Display Cabinets

*Cafeterias • Convenience Stores
Catering • Concessions*



GRS2G-3920-5 in optional *Designer Black* and **GRS2G-3920-2** pg. 142



FDWD-2X with 4-shelf multi-purpose rack and optional sign holder pg. 143



IHDCH-45 with accessory risers and sign holders pg. 148



MDW-1X with optional *Designer Black* and hood with backlit sign cutout on one side (sign included) pg. 151



FST-1-MN shown in standard bronze pg. 152



FSHC-7W1-EE shown in *Designer Black*, with optional right-hand hinged door pg. 154



FSHC-17W1 with accessory food pans pg. 155



FSHC-6W1 with accessory food pans pg. 156



FS2HAC-2PT Pass-through with accessory food pans pg. 158

Glo-Ray 2-Go™ Heated Shelves

The Hatco Glo-Ray 2-Go™ Heated Shelves are designed specifically with your delivery and carry-out needs in mind. Capable of holding a great quantity of hot food items at optimum serving temperatures, the GRS2G models hold bags and boxes up to 30 minutes with a high temperature range of up to 93° C.

- Shelves are 508 mm deep and 991 mm wide, large enough for pizza boxes and bags, which will easily fit into the 330 mm clearance of each shelf
- Touchscreen control with digital read out indicates separate heat and timer for each shelf
- Standard units feature shelves with heated bases that are thermostatically-controlled and have a stainless steel frame
- The cord is recessed into the bottom shelf at a 45° angle, allowing the unit to be flush against either wall



GRS2G-3920-2


GRS2G-3920-3
with optional side panels

GRS2G-3920-4
with optional back panels

GRS2G-3920-5
with optional side
and back panels

Model	Description	Dimensions W x D x H*	Voltage	Watts	Amps	Ship Weight	List Price†
GRS2G-3920-2	2 heated shelves	1093 x 508 x 546 mm	220-240	644-766	2.9-3.2	44 kg	\$3418
GRS2G-3920-3	3 heated shelves	1093 x 508 x 908 mm	220-240	965-1148	4.4-4.8	55 kg	4267
GRS2G-3920-4	4 heated shelves	1093 x 508 x 1270 mm	220-240	1285-1529	5.8-6.4	79 kg	5113
GRS2G-3920-5	5 heated shelves	1093 x 508 x 1631 mm	220-240	1607-1912	7.3-8.0	88 kg	5983


* Height does not include 34 mm side wall mounting brackets.

† CE mark not available.

All Heated Shelf Models Feature:

Models shipped with: Side wall mounting brackets, 152 mm adjustable flanged feet that can be bolted to the floor for additional stability and a 1829 mm recessed cord and plug.

Cord Location: Server side, bottom right corner.

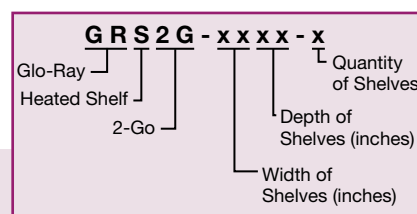

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Stainless Steel standard –

RED	Warm Red	BLACK	Black	GRAY	Gray Granite	WHITE	White Granite	
NAVY	Navy Blue	GREEN	Hunter Green	COPPER	Antique Copper			\$460

CONTROL-GRS2G-R Controls and permanent panel on customers right side in lieu of standard left side **No Charge**

Side Panels – will be same color as unit –

SPANEL	GRS2G2	Side panels for a 2-shelf unit	\$ 89
	GRS2G3	Side panels for a 3-shelf unit	179
	GRS2G4	Side panels for a 4-shelf unit	268
	GRS2G5	Side panels for a 5-shelf unit	357

Back Panels – will be same color as unit –

BPANEL	GRS2G2	Back panels for a 2-shelf unit	\$ 77
	GRS2G3	Back panels for a 3-shelf unit	153
	GRS2G4	Back panels for a 4-shelf unit	229
	GRS2G5	Back panels for a 5-shelf unit	306

ACCESSORIES (available for purchase at any time)

4"LEGS	120 mm adjustable legs (GRS2G3029-2 and GRS2G-3920-3 models only)	Set of 4 \$60
--------	---	---------------

COLORS AND FINISHES – INSIDE BACK COVER

Flav-R-Fresh® Impulse Display Cabinets

A profitable way to create impulse food sales is with the small Flav-R-Fresh® Holding and Display Cabinet. Using controlled moisturized heat allows you to showcase your product longer using minimum counter space.

- Full-view display with tempered glass sides and door
- Controlled heat and humidity for longer holding times
- Accommodates half-size sheet pans
- Revolving or stationary display racks
- Models come with single- or double-door openings which provide fast access to food racks
- LED lights illuminate the holding areas and emphasize the product

FDWD-2 with standard 4-tier circle rack



IMPULSE CABINETS

Model*	Description°	Dimensions W x D x H (Height includes standard 25mm legs)	Cabinet Opening W x H	Voltage		Watts	Ship Weight	List Price ^{9†}
				50Hz				
FDWD-1	1 Door w/ 4-tier Circle Rack w/Motor	492 x 530 x 732 mm	400 x 502 mm	220, 240		1410	41 kg	\$4104
FDWD-1X	1 Door w/4-tier Multi-Purpose Rack	492 x 530 x 732 mm	400 x 502 mm	220, 240		1410	41 kg	3980
FDWD-2	2 Doors w/4-tier Circle Rack	492 x 559 x 732 mm	400 x 502 mm	220, 240		1410	41 kg	4231
FDWD-2X	2 Doors w/4-tier Multi-Purpose Rack	492 x 559 x 732 mm	400 x 502 mm	220, 240		1410	41 kg	4100

* Models FDWD-1 and FDWD-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.

° Rack listed is included with unit. Other racks available – deduct price of included rack and add price of substituted rack to list price.

⁹ For non-humidified cabinet, deduct \$210. Unit will only operate in dry mode.

† Available with CE Mark, add \$20.

All Impulse Cabinet Models Feature:

Door Hinges: Control Side: Left-hand side.


Customer Side (two-door models only): Right-hand side.

Max. Pizza Size: 381 mm diameter with 4-Tier Circle Rack.

Water Tank Capacity for Humidity System: 2 liters.

Cord Location: Facing controls, left-hand side panel, lower right corner.

WATER QUALITY REQUIREMENTS – PAGE 190



OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Aluminum Standard –

RED	Warm Red	\$460
BLACK	Black	460
GRAY	Gray Granite	460
WHITE	White Granite	460
NAVY	Navy Blue	460
GREEN	Hunter Green	460
COPPER	Antique Copper	460
LED-NW18	Neutral White (cool) LED lighting (in lieu of standard Warm White)	No Charge
FDWD-SCD	Self Closing Door in lieu of standard door (left hinge only). Must upgrade both doors on FDWD-2, -2X (not field reversible)	per door \$ 84
FDWD-6FRT	152 mm Merchandising Display Sign Holder for Control Side only (Includes metal holder only). Available in all Designer Colors to match your unit (Black is standard). Adds 29 mm to height of unit. Requires (1) sign 491 W x 157 H x 2 D mm – not included	113
FDWD-6SIGN	162 mm One Sided Merchandising Display Sign Holder (includes metal holder and window) – one per side, three maximum. Available in all Designer Colors to match your unit (Black is standard). Adds 32 mm to height of unit. Requires (1) sign 491 W x 159 H x 1.59 D mm – not included	88
FDWD-DIS	76 mm One-Sided Merchandising Display Sign Holder (includes metal holder and window) – one per side, three maximum. Available in all Designer Colors to match your unit (Black is standard). Adds 32 mm to height of unit. Requires (1) sign 484 W x 83 H x 2 D mm – not included	80

ACCESSORIES (available for purchase at any time)

FDWD-LEGS	102 mm, Adjustable Legs (102-127 mm)	\$ 84
COUPLING	Motorless Rack Coupling for FDWD-1X and -2X models (select Circle Rack or Pretzel Tree)	46
FDWD4TCRR	4-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)	251
FDWSMP	4-Shelf Multi-Purpose Rack (each shelf 346 W x 321 D mm)	284
FDW3TPT	3-Tier Pretzel Tree (requires Coupling for -1X or -2X models)	284
FDW3SAR	3-Shelf Angle Rack	588

DECORATIVE KIT – 146

RACKS – PAGE 147

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER



COUPLING
Accessory

Flav-R-Savor® Holding & Display Cabinets

Balancing a precise combination of heat and humidity, the Hatco Flav-R-Savor® Cabinets provide an attractive showcase for hot food displays and generate impulse sales. A complete range of cabinet sizes, door options and rack types allows for perfect merchandising of food products such as pizza, fried foods, bakery items, sandwiches and more.

- Full-view display with tempered glass sides and door provide maximum heat retention
- Controlled heat and humidity for longer holding times
- 3 liter stainless steel water reservoir provides all day moisture
- Low-water protection prevents heating element burnout and alerts operator to low-water condition

- Revolving or stationary display racks
- Available in two heights with single-sided or double-sided openings
- Energy efficient LED lighting to illuminate your food display



FSD-1 with optional 3-tier pan rack and accessory food pans



FSDT-2 with standard 4-tier circle rack and 102 mm legs, optional *Designer Black* color and accessory food pans

DISPLAY CABINETS

Model*	Description°	Dimensions W x D x H	Cabinet Opening Dimensions W x H	Voltage 50Hz	Watts	Ship Weight	List Price [†]
Standard							
FSD-1	1 Door w/3-Tier Circle Rack	569 x 612 x 699 mm	483 x 473 mm	220, 240	1414	59 kg	\$5188
FSD-1X	1 Door w/3-Tier Pan Rack	569 x 612 x 699 mm	483 x 473 mm	220, 240	1414	57 kg	5036
FSD-2	2 Doors w/3-Tier Circle Rack	569 x 642 x 699 mm	483 x 473 mm	220, 240	1414	57 kg	5533
FSD-2X	2 Doors w/3-Tier Pan Rack	569 x 642 x 699 mm	483 x 473 mm	220, 240	1414	57 kg	5384
Tall							
FSDT-1	1 Door w/4-Tier Circle Rack	569 x 612 x 826 mm	483 x 603 mm	220, 240	1414	58 kg	\$5273
FSDT-1X	1 Door w/4-Tier Pan Rack	569 x 612 x 826 mm	483 x 603 mm	220, 240	1414	57 kg	5071
FSDT-2	2 Doors w/4-Tier Circle Rack	569 x 642 x 826 mm	483 x 603 mm	220, 240	1414	57 kg	5683
FSDT-2X	2 Doors w/4-Tier Pan Rack	569 x 642 x 826 mm	483 x 603 mm	220, 240	1414	57 kg	5484

* Models FSD-1, FSD-2, FSDT-1 and FSDT-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.

° Rack listed is included with unit. Other racks available – deduct price of included rack and add price of substituted rack to list price.

° For non-humidified cabinet, deduct \$210. Unit will only operate in dry mode.

† Available with CE Mark, at no added charge.

All Models Feature:

Door Hinges: Control Side: Left-hand side.

Customer Side (Two-door models only): Right-hand side.

Max. Pan Size: 483 mm diameter with 4-Tier Circle Rack.

Water Tank Capacity for Humidity System: 3 liters.


Cord Location: Facing controls, left-hand side panel, lower right corner.

OPTIONS AND ACCESSORIES – PAGE 145

DECORATIVE KIT – 146

RACKS – PAGE 147

WATER QUALITY REQUIREMENTS – PAGE 190

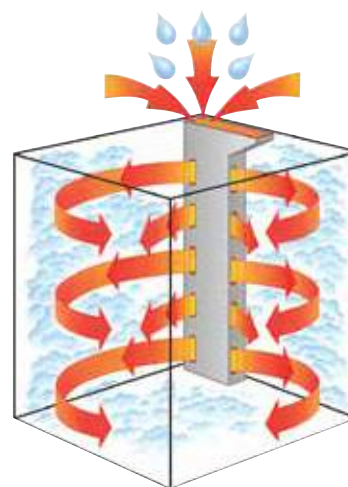

CONTROLLED MOISTURIZED HEAT KEEPS HOT FOODS FRESH LONGER Hatco's Flav-R-Savor® air flow pattern is designed to maintain consistent cabinet temperature without drying out foods. The precise combination of heat and humidity creates a "blanket" effect around the food. The air flow rate enables the cabinet to recover temperature rapidly after opening and closing the door.

FSDT - x X	
Flav-R-Savor Display Cabinet	No Character = With Rack Motor
No Character = Standard Height	X = No Rack Motor
T = Tall	1 = One Door
	2 = Two Door



Two FSDT-1 with 4-tier circle racks, optional sign holders (signs not included) and accessory food pans

OPTIONS (available at time of purchase only)

LED-NW18	Neutral White (cool) LED lighting (in lieu of standard Neutral White)	No Charge
THERM	Mechanical Controls	No Charge
FSD7SIGN	191 mm Merchandising Display Sign Holder (includes metal holder and window) – one per side, three maximum. Available in all Designer Colors to match your unit (Black is standard). Adds 32 mm to height of unit. Requires (1) sign 572 W x 191 H x 2 D – sign not included	\$92

ACCESSORIES (available for purchase at any time)

F-LEGS-4	102 mm Adjustable Legs	\$84
COUPLING	Motorless Rack Coupling for FSD-1X, FSD-2X, FSDT-1X and FSDT-2X models (select appropriate Circle Rack or Pretzel Tree)	46

RACKS – FSD ONLY –

FSD5SMP	5-Shelf Multi-Purpose Rack (each shelf 457 W x 406 D mm)	\$382
FSD3TCR	3-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)	234
FSD3TPR	3-Tier Pan Rack (accommodates Half-Size Sheet Pans, not included)	338

RACKS – FSDT ONLY –

FSDT7SMP	7-Shelf Multi-Purpose Rack (each shelf 457 W x 406 D mm)	\$468
FSDT4TCR	4-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)	249
FSDT5TCR	5-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)	378
FSDT4TPR	4-Tier Pan Rack (accommodates Half-Size Sheet Pans, not included)	299
FSDT3SAR	3-Shelf Angle Rack (15° angle shelves) (each shelf 457 W x 413 D mm)	863
FSDT3TPT	3-Tier Pretzel Tree (requires Coupling for -1X or -2X models)	408

COLORS AND FINISHES – INSIDE BACK COVER
OPTIONS

(available at time of purchase only)

Designer Colors –


 Non-standard colors are non-returnable –
Clear Anodized Aluminum Standard –

RED	Warm Red	\$460
BLACK	Black	460
GRAY	Gray Granite	460
WHITE	White Granite	460
NAVY	Navy Blue	460
GREEN	Hunter Green	460
COPPER	Antique Copper	460

Decorative Kit for FDWD, FSD, FSDT models only

Transform your Hatco Flav-R-Savor® Holding & Display Cabinet from a "heated box" into a *Designer Merchandiser* with a variety of simple accessory additions. Create a new look and feel to your décor.

- The curved hinged header allows easy access to controls and water fill cup, and gives a great area to brand your food product with a magnetic sign (sign not included)
- The base skirt completes the transformation and gives an additional branding area. Available in flat or curved panels for front and/or back of unit
- Signs can be decals or magnetic
- Signs not included

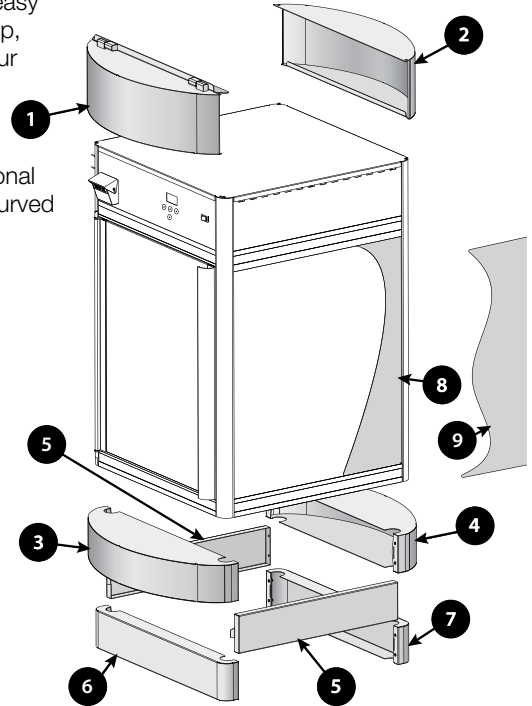

OPTIONS (available at time of purchase only) (additional lead time required)

Designer Colors – Non-standard colors are non-returnable – Black Standard –

RED	WR	Warm Red	No Charge
GRAY	GG	Gray Granite	No Charge
WHITE	WG	White Granite	No Charge
NAVY	NB	Navy Blue	No Charge
GREEN	HG	Hunter Green	No Charge
COPPER	AC	Antique Copper	No Charge

ACCESSORIES (available for purchase at any time)

Side Insets – must choose Designer Color – Black Standard –

FSD-INSET1 ③	Two Crescent Inset Panels for FSD models	\$91
FSD-INSET2 ④	Two Wave Inset Panels for FSD models	91
FSDT-INSET1 ③	Two Crescent Inset Panels for FSDT models	91
FSDT-INSET2 ④	Two Wave Inset Panels for FSDT models	91
FDWD-INSET1 ③	Two Crescent Inset Panels for FDWD models	91
FDWD-INSET2 ④	Two Wave Inset Panels for FDWD models	91

Top Covers – must choose Designer Color – Black Standard –

FSD-CTLH ①	Curved Hinged Header on control side (Fits 609 W x 149 H mm sign) for FSD and FSDT models	\$316
FDWD-CTLH ①	Curved Hinged Header on control side (Fits 520 W x 123 H sign) for FDWD models	269
FSD-CUSH ②	Curved Header on non-control side (Fits 609 W x 149 H mm sign) for FSD and FSDT models	230
FDWD-CUSH ②	Curved Header on non-control side (Fits 520 W x 123 H sign) for FDWD models	197

Base Skirts – requires 102 mm Adjustable Legs (not included)

– must choose Designer Color – Black Standard –

FSD-SQB	One Flat Front Panel ⑤ and one Flat Back Panel ⑦ (Fits 508 W x 93 H mm sign) and two Flat Side Panels ⑥ (Fits 473 W x 93 mm H sign) for FSD and FSDT models	\$273
FDWD-SQB	One Flat Front Panel ⑤ and one Flat Back Panel ⑦ (Fits 438 W x 96 H mm sign) and two Flat Side Panels ⑥ (Fits 393 W x 96 mm H sign) for FDWD models	355
FSD-1CB	One Curved Front Panel ③ (Fits 647 W x 93 H mm sign) and one Flat Back Panel ⑦ (Fits 508 W x 93 H mm sign) and two Flat Side Panels ⑥ (Fits 473 W x 93 mm H sign) for FSD and FSDT models	489
FDWD-1CB	One Curved Front Panel ③ (Fits 660 W x 92 H mm sign) and one Flat Back Panel ⑦ (Fits 508 W x 92 H mm sign) and two Flat Side Panels ⑥ (Fits 473 W x 92 mm H sign) for FDWD models	475
FSD-2CB	One Curved Front Panel ③ and one Curved Back Panel ④ (Fits 647 W x 93 H sign) and two Flat Side Panels ⑥ (Fits 473 W x 93 mm H sign) for FSD and FSDT models	704
FDWD-2CB	One Curved Front Panel ③ and one Curved Back Panel ④ (Fits 565 W x 96 H sign) and two Flat Side Panels ⑥ (Fits 393 W x 96 mm H sign) for FDWD models	599
F-LEGS-4	102 mm Adjustable Legs for FSD and FSDT models	\$84
FDWD-LEGS	102 mm Adjustable Legs for FDWD models	84


COLORS AND FINISHES – INSIDE BACK COVER




FSDT-1 with 4-tier circle rack and full Decorative Kit (signs not included)

Display Rack Selections


Racks For FDWD Models (Page 143)




4-Tier Circle Rack
FDWD4TCRR
(Max. 381 mm dia. pans)
(83 mm between tiers)



4-Shelf Multi-Purpose Rack
FDW4SMP
(Max. 457 x 330 mm)
(Half-Size Sheet Pans fit
FDWD-2 and -2X models only)
(95 mm between shelves)




3-Tier Pretzel Tree
FDW3TPT
(149 mm between tiers)




3-Tier ANGLE RACK
FDW3SAR
(137 mm between tiers)


Racks For FSD/FSDT Models (Page 144)




FSDT 4-Tier Circle Rack
FSDT4TCR
(Max. 483 mm dia. pans)
(117 mm between tiers)




5-Tier Circle Rack
FSDT5TCR
(Max. 483 mm dia. pans)
(98 mm between tiers)




FSDT 4-Tier Pan Rack
FSDT4TPR (Max. 457 x 330 mm
Half-Size Sheet Pans)
(89 mm between tiers)




FSDT 3-Shelf Angle Rack
FSDT3SAR
(89 mm between shelves)




FSDT 3-Tier Pretzel Tree
FSDT3TPT
(149 mm between tiers)




FSDT 7-Shelf Multi-Purpose Rack
FSDT7SMP
(Max. 457 x 330 mm Half-Size
Sheet Pans)
(64 mm between shelves)



FSD 3-Tier Circle Rack
FSD3TCR
(117 mm between tiers)



FSD 3-Tier Pan Rack
FSD3TPR
(89 mm between tiers)



FSD 5-Shelf Multi-Purpose Rack
FSD5SMP
(64 mm between shelves)

R Removable Shelves

Intelligent Heated Display Cabinet, Humidified

Hatco's Intelligent Heated Display Cabinet Humidified is the perfect way to showcase your pizzas and more. Regulating air temperature while at the same time balancing the humidity levels provides the best environment for food products. With 360° viewing, your food is guaranteed to get all the attention.

- Air flow pattern is designed to maintain consistent cabinet temperature without drying out food
- Air flow system enables the cabinet to recover temperature rapidly after opening and closing the door
- LCD touchscreen display on back of unit controls temperature, humidity and up to eight timers for each food location
- Energy efficient LED lighting to illuminate your food display
- USB port on back of unit makes it easy to update firmware
- Adjustable arms can move up and down the back supports (unit can hold up to six pizza arms)
- The Arm is designed to hold maximum 559 mm pizza pan



IHDCH-45
shown with
accessory risers



IHDCH-28
shown with
accessory two
arms and one shelf

NOTE: Water filter, strainer and tubing are included with each cabinet to be installed on water supply connection.

INTELLIGENT HEATED DISPLAY CABINETS – HUMIDIFIED

Model	Dimensions W x D x H	Cabinet Opening Dimensions (W x H)	Voltage	Watts	Amps	Ship Weight	List Price
IHDCH-28	718 x 728 x 766 mm	558 x 525 mm	230	3090 or 3090	14.9 or 12.9	100 kg	\$11743
IHDCH-45	1149 x 728 x 766 mm	457 x 530 mm	230	3090 or 3090	14.9 or 12.9	122 kg	12540


All Intelligent Heated Display Cabinet Models Feature:

Models Shipped With: IHDCH-28: Stainless Steel unit with single french door, touchscreen controller, a lighted Power On/Off (I/O) switch, an air heating/circulation system, a humidity system, a USB port and LED display lights.

IHDCH-45: Stainless Steel unit with sliding glass doors, touchscreen controller, a lighted Power On/Off (I/O) switch, an air heating/circulation system, a humidity system, a USB port, LED display lights and four adjustable arms.

Cord Location: Servers side, bottom left corner.

OPTIONS AND ACCESSORIES – PAGE 149
WATER QUALITY REQUIREMENTS – PAGE 190



On all Intelligent Heated Display Cabinet Models customers must purchase arms and shelves separately to their own specifications.

Below are the options available to combine the shelves and arms

IHDCH-28

- 4 Arms
- 2 Shelves
- 1 Shelf with 1 Pizza Arm
- 1 Shelf with 2 Pizza Arms
- 2 Shelves with 1 Pizza Arm

IHDCH-45

- 6 Arms
- 3 Slanted Shelves
- 1 Shelf with 2 Pizza Arms
- 1 Shelf with 4 Pizza Arms
- 2 Shelves with 2 Pizza Arms



IHDC-45 shown with standard arms, accessory risers and accessory sign holders.

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Stainless Steel Standard –

IHDCH-BK	Unit in <i>Designer Black</i> in lieu of Stainless Steel unit	\$ 460
IHDCHBASE-BK-28	Inside base in <i>Designer Black</i> in lieu of Stainless Steel base for IHDC-28	27
FRTDOOR-28	Front, swing out door for IHDC-28, left-hand hinge standard, matches unit color (adds 102 mm to depth)	884
IHDCHBASE-BK-45	Inside base in <i>Designer Black</i> in lieu of Stainless Steel base for IHDC-45	34
FRFRTDOOR-45	Front, self-closing French doors for IHDC-45, matches unit color (adds 102 mm to depth)	1675

ACCESSORIES (available for purchase at any time)

ADJARM-SS-28	Adjustable Arm in Stainless Steel for IHDC-28	each \$ 182
ADJARM-BK-28	Adjustable Arm in <i>Designer Black</i> for IHDC-28	each 221
SHELF-SS-28	Shelf in Stainless Steel for IHDC-28	each 246
SHELF-BK-28	Shelf in <i>Designer Black</i> for IHDC-28	each 246
ADJARM-SS-45	Adjustable Arm in Stainless Steel for IHDC-45	each 182
ADJARM-BK-45	Adjustable Arm in <i>Designer Black</i> for IHDC-45	each 221
SHELF-SS-45	Shelf in Stainless Steel for IHDC-45	each 362
SHELF-BK-45	Shelf in <i>Designer Black</i> for IHDC-45	each 627
RISER12-SS	305 mm diameter x 38 mm H Riser in Stainless Steel	28
RISER12-BK	305 mm diameter x 38 mm H Riser in <i>Designer Black</i>	40
DOORLOCKIHDCH	Front Door lock for IHDC-28 only	25
RO KIT	Reverse Osmosis System with storage tank	1663
REGKIT	Water Pressure Regulator Kit (regulator, gauge and shut-off valve)	383

SIGN HOLDERS (signs not included) – recommended sign size: 50 x 88 mm –

SGNHOLD-BASE-SS	Sits on base of unit in Stainless Steel	each \$18
SGNHOLD-BASE-BK	Sits on base of unit in <i>Designer Black</i>	each 33
SGNHOLD-LARM-SS	Customer left-hand side in Stainless Steel (clips onto Arm)	each 20
SGNHOLD-LARM-BK	Customer left-hand side in <i>Designer Black</i> (clips onto Arm)	each 38
SGNHOLD-RARM-SS	Customer right-hand side in Stainless Steel (clips onto Arm)	each 20
SGNHOLD-RARM-BK	Customer right-hand side in <i>Designer Black</i> (clips onto Arm)	each 38

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER

Flav-R-Savor® Humidified Large Capacity Holding Cabinets

Hatco Large Capacity Holding Cabinets hold more product at proper serving temperatures than standard size models. This allows for food to be prepared in advance of peak serving periods, while placing product in full-view cabinets to increase impulse sales.

- Full-view display with tempered glass sides and LED lighting to illuminate holding area
- Optional self-closing sliding doors for self-serve applications

- Optional self-closing French doors,
- Optional cool LED lighting and 4" adjustable legs available
- Multi-purpose display racks included



WFST-2X with 4-shelf multi-purpose rack, optional Designer Warm Red and self-closing sliding doors and accessory pans, and 102 mm legs



WFST-1X with 4-shelf multi-purpose rack. Decals and pans not included

WIDE CAPACITY CABINETS

Model	Description	Dimensions W x D x H	Cabinet Opening W x H	Voltage single phase	Hz	Watts	Ship Weight	List Price [‡]
WFST-1X	2 Doors w/4-shelf Rack	814 x 641 x 831 mm	711 x 557 mm	220 or 240	50/60	1706 or 1712	83 kg	\$9117
WFST-2X	4 Doors w/4-shelf Rack	814 x 703 x 831 mm	711 x 557 mm	220 or 240	50/60	1706 or 1712	85 kg	9733

[‡] CE Mark not available.

All Large Capacity Cabinet Models Feature:

Available Shelf Space: 666 W x 501 D mm. Holds one full-size sheet pan per shelf.

Water Tank Capacity for Humidity System: 3 liters.

Cord Location: Servers side, left-hand side panel, lower right corner.

WATER QUALITY REQUIREMENTS – PAGE 190

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable –
– Clear Anodized Aluminum Standard –



RED	Warm Red	\$460
BLACK	Black	460
GRAY	Gray Granite	460
WHITE	White Granite	460
NAVY	Navy Blue	460
GREEN	Hunter Green	460
COPPER	Antique Copper	460
1SLIDE-DR	Self-closing Sliding Doors in lieu of standard Hinged Doors on one side only (WFST-2X model only)	\$484
FRSELFCL	Self-closing French Doors	per side 149
WFST-TTC	Temperature Control Timer - 6 channel control touchscreen display	573
LED-NW18	Neutral White (cool) LED lighting (in lieu of standard Warm White)	No Charge

ACCESSORIES (available for purchase at any time)


FSTCR-LEG	102 mm Adjustable Legs	\$81
------------------	------------------------	-------------

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER



**WFST 4-Shelf
Multi-Purpose Rack**
Adjustable Shelves
in 51 mm increments



Mini Display Warmers

The Hatco Mini Display Warmer is perfect for cookies, pastries, wrapped or boxed sandwiches or any other product that does not require humidity. Hot air circulates throughout the entire cabinet, keeping food at safe serving temperatures. The small footprint takes up little of your valuable counter space while merchandising your breakfast, lunch or dinner offerings.

- Magnetically adjustable shelves allow horizontal or slanted displays
- Tempered glass sides and incandescent light showcase your food
- Thermostatic control with rocker switch
- Field reversible door hinge location
- Available as a 1-door or a 2-door pass-through model
- Doors may be field converted to any side
- Optional black hood with backlit graphic sign cut-out that can be rotated in field to face any side (sign included)



MDW-1X with standard *Designer Black* and optional hood with backlit sign cut-out on one side (sign included)



Magnetically adjustable shelves are easy and offer quick adjustability for different food products

MINI DISPLAY WARMERS - NON-HUMIDIFIED

Model	Description	Dimensions W x D x H	Cabinet Opening W x H	Voltage	Watts	Ship Weight	List Price [†]
MDW-1X	1 Door w/3 Shelves	400 x 432 x 646 mm	315 x 396 mm	230	510	21 kg	\$2589
MDW-2X	2 Doors w/3 Shelves	400 x 465 x 646 mm	315 x 396 mm	230	510	24 kg	2690

[†] Available with CE Mark, at no added charge.

All Mini Display Warmer Models Feature:

Door Hinges: Control Side: Left-hand side.

Customer Side (two-door models only): Right-hand side.


Cord Location: Servers side, lower right corner.

OPTIONS (available at time of purchase only)

Designer Color for Posts, Base and Top Trim – Non-standard colors are non-returnable – Black Standard

RED	Warm Red	No Charge
GRAY	Gray Granite	No Charge
WHITE	White Granite	No Charge
NAVY	Navy Blue	No Charge
GREEN	Hunter Green	No Charge
COPPER	Antique Copper	No Charge
BCKLIT-MDW	Hood with Backlit Sign Cut-out on one side - Black only (sign included)	\$131

COLORS AND FINISHES – INSIDE BACK COVER





Macho Nacho® Chip Warmers

Keep your nacho chips hot, fresh and crisp with Hatco's Macho Nacho Chip Warmer. This highly-visible heated merchandiser circulates air to prevent the loss of natural oils, eliminating the need to frequently replace stale chips.

- Keeps chips hot, fresh and crisp longer, reducing refill time and minimizing waste
- Specialty cabinet to hold and merchandise bulk nacho chips
- Special ductwork forces dry heat through chips from the bottom up
- Special two-door access for easy loading and serving
- 11 kg or 18 kg capacity
- Shatter-resistant incandescent lights illuminate the holding areas and emphasize the product

**FDWD-1-MN****FST-1-MN**
shown in
standard
Bronze

CHIP WARMERS – NON-HUMIDIFIED

Model	Dimensions W x D x H	Cabinet Opening (W x H)		Voltage	Watts	Amps	Product Capacity	Ship Weight	List Price [†]
		Upper Door	Lower Door						
FDWD-1-MN	492 x 608 x 732 mm	416 x 233	416 x 233	220, 240	950-1129	4.3-4.7	11 kg	46 kg	\$4059
FST-1-MN	581 x 686 x 831 mm	474 x 286	474 x 252	220, 240	1219-1252	5.6-5.2	18 kg	60 kg	5704

[†] Available with CE Mark, at no added charge.

All Chip Warmer Models Feature:

Decal Size: FDWD-1-MN: 423 W x 139 H mm.

FST-1-MN: 473 W x 152 H mm.

Cord Location: Facing controls, left-hand side panel, lower right corner.

F x x x - 1 - M N

FDWD = 11 kg Chip Capacity
FST = 18 kg Chip Capacity

Macho Nacho Unit
Single Side Opening

Flav-R-Savor® Tall Non-Humidified Holding Cabinets

Be prepared to serve ready-to-go pizzas with Hatco's Flav-R-Savor® Tall Dry Holding Cabinets. An eight-shelf rack with 127 mm centers will hold a maximum of 16 boxed (457 Sq x 59 H mm maximum) or 8 bagged pizzas.

- Great for boxed or bagged carryout pizzas
- Tempered glass throughout for excellent visibility, improving product rotation
- Even, constant cabinet temperatures with no humidity
- Two, shatter-resistant, incandescent lights at the back top of the unit to illuminate product
- Units come with an eight-shelf rack, six of which are removable



PFST-2X with standard stainless steel 8-shelf rack

Holding &
Display Cabinets

TALL HOLDING CABINETS - NON-HUMIDIFIED

Model	Description	Dimensions W x D x H	Opening Dimensions W x H	Available Shelf Space W x D x H	Voltage	Ship Weight	List Price [‡]
PFST-1X	1 Door	581 x 635 x 1448 mm	476 W x 1026 H mm	457 x 457 x 117 mm	220, 240	91 kg	\$7585
PFST-2X	2 Doors	581 x 692 x 1448 mm	476 W x 1026 H mm	457 x 457 x 117 mm	220, 240	94 kg	7983

[‡] CE Mark not available.

All Tall Dry Holding Cabinet Models Feature:

Models Shipped with: PFST-1X, -2X: Stainless Steel body, an eight-shelf rack with 6 removable shelves in standard stainless steel, new latching handle, 127 mm locking casters, cord and plug.


Cord Location: Facing controls, left-hand side panel, lower right corner.

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable –
– Clear Anodized Aluminum Standard –

BLACK Black \$460

COLORS AND FINISHES – INSIDE BACK COVER





Flav-R-Savor® Portable Holding Cabinets

Hatco's energy efficient Flav-R-Savor® Portable Holding Cabinets will keep prepared foods at optimum serving temperatures for hours. The thermostatically-controlled heat and humidity allows food to be prepared in advance of peak serving periods.

- Allows you to hold product longer while saving you money through increased energy efficiencies
- Electronic control with digital read out, temperature range of 27°- 93°C and humidity controller
- The lower temperature range of 27°- 38°C can be used for proofing all types of breads
- All stainless steel interior
- No heating element in direct contact with water makes the unit easier to clean

- Accommodates Gastronorm pans
- Stacking kit available
- Doors are field convertible from left to right



FSHC-7W1-EE shown in *Designer Black*, with optional bumper kit, and right-hand hinged door



PORTABLE HOLDING CABINETS

Model	Description	Dimensions W x D x H	Interior Cabinet Capacity W x D	Voltage 50/60 Hz	Watts	Amps	Shipping Weight	List Price [‡]
FSHC-5W1-EE	Single Door	661 x 794 x 913 mm	532 x 676 mm	230	1182	5.1	113 kg	\$8533
FSHC-7W1-EE	Single Door	661 x 794 x 989 mm	532 x 676 mm	230	1182	5.1	101 kg	8968
FSHC-7W2-EE	2-Door Pass-Through	661 x 877 x 989 mm	532 x 676 mm	230	1182	5.1	105 kg	9468

[‡] Available with CE Mark, at no added charge.

All Models Feature:

Top Surface Dimensions: 654 W x 724 D mm.

Models Shipped with: 1829 mm cord and plug, 102 mm diameter casters (with 130 mm clearance), stainless steel heavy-duty door with left-hand door hinge and adjustable rack slides (seven for the -7WX-EE units, and five for the -5W1-EE unit).

Pan Capacity: -5W1-EE: 10 full sized sheet pans or 2/1 Gastronorm pans on 41 mm spacing, 5 full sized sheet pans or 2/1 Gastronorm pans on 83 mm spacing, 20 full sized hotel pans or 1/1 Gastronorm pans on 41 mm spacing, 10 full sized hotel pans or 1/1 Gastronorm pans on 83 mm spacing.

-7Wx-EE: 14 full sized sheet pans[‡] or 2/1 Gastronorm pans on 35 mm spacing, 7 full sized sheet pans or 2/1 Gastronorm pans on 70 mm spacing, 14 hotel sized pans or 1/1 Gastronorm pans on 35 mm spacing.

Water Tank Capacity for Humidity System: 4 liters.

Cord Location: Recessed, back of unit, upper right side.

[‡]With purchase of extra pan slides.

WATER QUALITY REQUIREMENTS – PAGE 190

OPTIONS (available at time of purchase only)

Colors (Side Panels) – Non-standard colors are non-returnable – Black Standard –

SS Stainless Steel **\$227**

Colors (Top) – Non-standard colors are non-returnable – Black Standard –

SS Stainless Steel **\$227**

EE-GLASS Glass Door in lieu of Stainless Steel door (is not Energy Star qualified) **\$282**

EE-LPCAST Low Profile Casters (FSHC-5W1-EE model only) (deduct 57 mm from height) **No Charge**

EE-PLATFORM Platform for mounting directly on a counter in lieu of casters (deduct 105 mm from height) **No Charge**


EE-STACK-BLK Designer Black Powdercoated Stacking Hardware mounted to bottom of cabinet for two FSHC-7W1 or two FSHC-5W1 units in lieu of casters (cannot have legs on lower unit) **No Charge**

EE-STACK-SS Stainless Steel Stacking Hardware mounted to bottom of cabinet for two FSHC-7W1 or two FSHC-5W1 units in lieu of casters (cannot have legs on lower unit) **No Charge**

EE-BUMPER Bumper Hardware - only for use with standard casters (add 3 mm to height) **543**

EE-4LEGS 102 mm Legs - in lieu of casters (deduct 13 mm from height) **No Charge**

EE-6LEGS 152 mm Legs - in lieu of casters (add 45 mm to height) **No Charge**




EE-1-SLIDE Accessory

ACCESSORIES (available for purchase at any time)

EE-1-SLIDE Extra Pan Slides **pair \$105**

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER

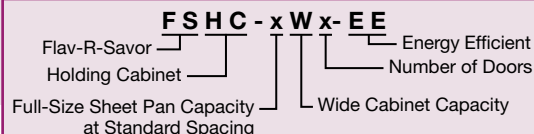

Flav-R-Savor® Tall Humidified Holding Cabinets

The expanded capacity of Hatco's Tall Humidified Cabinets offers flexibility – giving customers more variety of menu items, and holding larger quantities of proven favorites ahead of peak serving periods. The universal slides of the FSHC-17W models will hold 17 sheet pans, or 34 steam table pans. FSHC-12W models will hold 12 sheet pans and 24 steam table pans.

- The Hatco Flav-R-Savor® Tall Humidified Holding Cabinets hold all types of hot foods at uniform optimum serving temperatures
- Electronic Controls with digital readout temperature range of 26°-93°C with precise heat and humidity settings assure uniform heating throughout the cabinet
- Using the lower temperature range of 26°-38°C allows perfect temperature for proofing all types of bread
- Lexan or stainless steel doors, full height, half height and pass through available
- All Stainless Steel interior and exterior
- Fully insulated doors, sidewalls, base and top assist in heat retention and quick recovery
- Field reversible, right- or left-hand hinged doors with magnetic latch and heavy duty plated hinges
- Fully welded tubular frame assures integrity of unit in any working environment



FSHC-17W1

Holding &
Display Cabinets

TALL HUMIDIFIED HOLDING CABINETS

Model	Description	Dimensions W x D x H (Height includes standard casters)	Cabinet Opening Dimensions W x H	Ship Weight	List Price 220, 240V†
FSHC-12W1	Single Lexan® Door	660 x 887 x 1448 mm	559 x 1105 mm	138 kg	\$11390
FSHC-12W2	2 Lexan® Doors – Pass-Through	660 x 898 x 1448 mm	559 x 1105 mm	143 kg	13735
FSHC-17W1	Single Lexan® Door	660 x 887 x 1862 mm	559 x 1518 mm	160 kg	11572
FSHC-17W1D	Single Opening w/ 2 Dutch Doors	660 x 887 x 1862 mm	559 x 1518 mm	163 kg	12450
FSHC-17W2	2 Lexan® Doors – Pass-Through	660 x 898 x 1862 mm	559 x 1518 mm	165 kg	13834
FSHC-17W2D	4 Dutch Doors – Pass-Through	660 x 898 x 1862 mm	559 x 1518 mm	177 kg	15228

† CE Mark not available.

All Tall Humidified Holding Cabinet Models Feature:

Voltage: 220V, 50/60Hz, 1800 watts or 240V, 50/60Hz, 2133 watts, single phase.

Models Shipped with: 127 mm casters (2 swivel with wheel locks and 2 rigid), universal slides for 457 x 660 mm pans or 305 x 508 mm pans.

Pan Capacity: FSHC-12W: 12-sheet pan capacity on 76 mm centers, adjustable on 38 mm centers, with 12 universal pan slides, designed to accommodate up to 12 sheet pans or up to 24 steam table pans.

FSHC-17W: 17-sheet pan capacity on 76 mm centers, adjustable on 38 mm centers, with 17 universal pan slides, designed to accommodate up to 17 sheet pans or up to 34 steam table pans.


Water Reservoir Capacity for Humidity System: 8 liters.

Cord Location: Facing controls, right-hand side panel, lower right corner.

WATER QUALITY REQUIREMENTS – PAGE 190

OPTIONS (available at time of purchase only)

DELUXE	Deluxe Package (includes Flush Mount Handles and Full Perimeter Bumper)	\$ 828
TRANS	Transport Package - includes Stand-Off Handles, Full Perimeter Bumper, Heavy-Duty 27 x 51 mm Casters (2 swivel with wheel locks and 2 rigid), and Flush Mount Transport Latch	1462
CORDWIND	Bracket for holding cord during transport (only available with Transport Package option for -12W, 17W Models)	84
12W-SS-DOOR	Stainless Steel Door in lieu of Lexan® Door	No Charge
17W-SS-DOOR	Stainless Steel Door in lieu of Lexan® Door	No Charge
17WD-SS-DOOR	Stainless Steel Dutch Doors in lieu of Lexan® Dutch Doors (FSHC-17W models only)	No Charge


17W-SLIDE
Accessory

ACCESSORIES (available for purchase at any time)

17W-SLIDE	Extra Pan Slides (FSHC-12W and FSHC-17W)	pair \$150
------------------	--	-------------------

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER



Flav-R-Savor® Portable Holding Cabinets

Prepare food in advance of peak serving periods and safely hold it at optimum serving temperatures with the Flav-R-Savor® Portable Holding Cabinet. Thermostatically-controlled heat and humidity allows you to hold product for hours.

- Thermostatically-controlled heat and humidity holds hot food at optimum serving temperatures longer
- Allows preparation of food in advance of peak serving periods
- Accommodates Gastronorm pans
- Electrical components, controls, water reservoir and digital temperature readout are located at the top for easy access
- Reduced height – less than 762 mm high, and wider footprint for increased capacity

- Insulated side walls, field reversible glass doors, large swivel casters with wheel locks and 1829 mm recessed cord and plug are standard
- Stacking kit available



FSHC-6W1 with
accessory food pans

LOW PROFILE HOLDING CABINETS – HUMIDIFIED

Model	Description	Dimensions W x D x H (Height includes standard casters)	Cabinet Opening Dimensions W x H	Ship Weight	List Price 220, 240V†
FSHC-6W1	1 Door	645 x 751 x 816 mm	546 x 483 mm	76 kg	\$7240
FSHC-6W2*	2 Doors	645 x 811 x 816 mm	546 x 483 mm	82 kg	7737

† Available with CE Mark, at no added charge.

* FSHC-6W2 is a two-door pass-through single cabinet, not two units stacked.

All Low Profile Holding Cabinet Models Feature:

Voltage: 220 or 240V, 50/60Hz, 1697 watts.

Top Surface Dimensions: 645 W x 657 D mm.

Models Shipped with: 1829 mm cord and plug, 102 mm diameter casters (with 130 mm clearance), six sets of adjustable angle slides.

Pan Capacity: Six 457 W x 660 D mm sheet pans or six 2/1 Gastronorm pans on 76 mm centers, eleven 457 W x 660 D mm sheet pans*, eleven 2/1 Gastronorm pans on 38 mm centers*, or twelve 508 W x 305 D x 64 H mm hotel pans*.

Water Tank Capacity for Humidity System: 3 liters.

Cord Location: Recessed, back of unit, upper right side.

*With purchase of extra pan slides.

WATER QUALITY REQUIREMENTS – PAGE 190

OPTIONS (available at time of purchase only)

Colors (Side Panels) – Non-standard colors are non-returnable – Silver Gray Standard –

BLACK	Designer Black	\$227
SS	Stainless Steel	227

Colors (Top) – Non-standard colors are non-returnable – Silver Gray Standard –

BLACK	Designer Black	\$224
SS	Stainless Steel	224

6W-SS-DR Stainless Steel Door in lieu of Glass Door **\$ 98**

HD-SS-DR Heavy-Duty Stainless Steel Door with Positive Latch Handle **405**

6W1-LPCAST 51 mm Low Profile Locking Casters in lieu of standard Casters (51 mm diameter with 76 mm clearance) (overall height 756 mm) **No Charge**

6W1-STACK Stacking Hardware mounted to top of cabinet for two FSHC-6W1 units in lieu of Casters (Silver Gray) **93**

CORDWIND Bracket for holding cord during transport **37**



ACCESSORIES (available for purchase at any time)

6W1-SLIDE	Extra Pan Slides	pair \$105
-----------	------------------	-------------------


FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER

6W1-SLIDE
Accessory

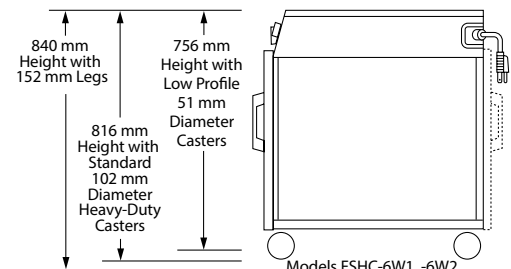

Models FSHC-6W1, -6W2

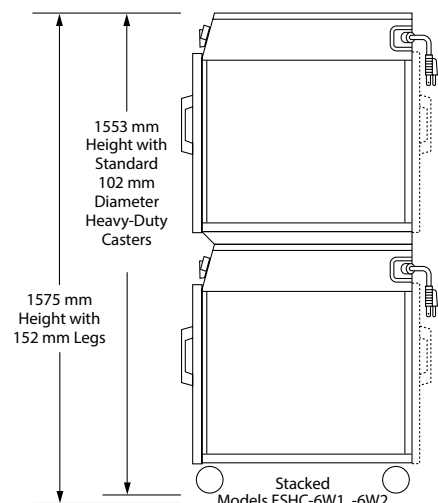

Stacked
Models FSHC-6W1, -6W2

Flav-R-Savor	FSHC - 6 W x	Quantity of Doors
Holding Cabinet		Wide
		Full-Size Sheet Pan Capacity

Flav-R-Savor® Humidified Portable Holding Cabinets

Prepare food in advance of peak serving periods and safely hold it at optimum serving temperatures with the Flav-R-Savor® Portable Holding Cabinet. Thermostatically-controlled heat and humidity allows you to hold product for hours.

- Thermostatically-controlled heat and humidity holds hot food at optimum serving temperatures longer
- Allows preparation of food in advance of peak serving periods
- Accommodates Gastronorm pans
- Electrical components, controls, water reservoir and digital temperature readout are located at the top for easy access
- Insulated side walls, field reversible glass doors, large swivel casters with wheel locks and 1829 mm recessed cord and plug are standard
- Stacking kit available

FSHC-7-1 with standard
102 mm casters and
accessory food pans



PORTABLE HOLDING CABINETS – HUMIDIFIED

Model	Description	Dimensions W x D x H (Height includes standard casters)	Cabinet Opening Dimensions W x H	Ship Weight	List Price 220, 240V†
FSHC-7-1	1 Door	578 x 753 x 892 mm	470 x 559 mm	79 kg	\$7304
FSHC-7-2*	2 Doors	578 x 812 x 892 mm	470 x 559 mm	82 kg	7806

† Available with CE Mark, at no added charge.

* FSHC-7-2 is a two-door pass-through single cabinet, not two units stacked.

All Portable Cabinet Models Feature:

Voltage: 220 or 240V, 50/60Hz, 1697 watts.

Top Surface Dimensions: 575 W x 657 H mm.

Models Shipped with: 1829 mm cord and plug, 102 mm diameter casters (with 130 mm clearance), seven sets of adjustable angle slides for 457 x 660 mm pans or 305 x 508 mm.

Pan Capacity: Seven 457 W x 660 D mm sheet pans on 76 mm centers, or seven 508 W x 305 D x 64 H mm hotel pans, or seven 1/1 Gastronorm pans.

Water Tank Capacity for Humidity System: 3 liters.

Cord Location: Recessed, back of unit, upper right side.

WATER QUALITY REQUIREMENTS – PAGE 190

OPTIONS (available at time of purchase only)

Colors (Side Panels) – Non-standard colors are non-returnable – Silver Gray Standard –

BLACK	Designer Black	\$227
SS	Stainless Steel	227

Colors (Top) – Non-standard colors are non-returnable – Silver Gray Standard –

BLACK	Designer Black	\$227
SS	Stainless Steel	227

SS-DR Stainless Steel Door in lieu of Glass Door **\$ 98**

HD-SS-DR Heavy-Duty Stainless Steel Door with Positive Latch Handle **405**

LPCAST 51 mm Low Profile Casters in lieu of standard Casters (51 mm diameter with 76 mm clearance) (Overall Height 832 mm) **37**

4LEGS 102 mm Adjustable Legs in lieu of standard Casters **No Charge**

6SS 152 mm Stainless Steel Legs in lieu of standard Casters **No Charge**

7-1-STACK Stacking Hardware mounted to top of cabinet for two FSHC-7-1 units in lieu of Casters (Silver Gray) **130**

CORDWIND Bracket for Holding Cord During Transport **37**

ACCESSORIES




(available for purchase at any time)

SLIDEWIRE Wire Shelf **per shelf \$137**

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER

SLIDEWIRE
Accessory

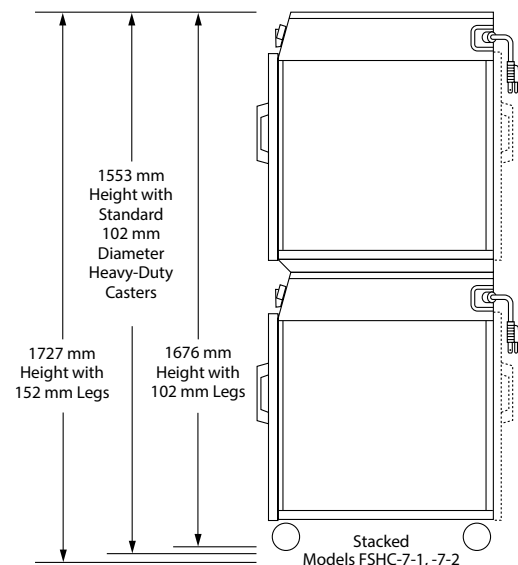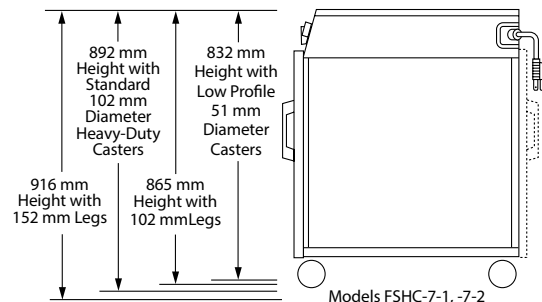

Flav-R-Savor **FSHC-7-x** Number of Doors
Humidified **x** Quantity of Shelves
Holding Cabinet

Flav-R-Savor® Heated Air Curtain Cabinets

The patented Flav-R-Savor® Heated Air Curtain Cabinet effectively and safely holds hot food hot without the use of doors. Warm air at the front of the cabinet is forced downward, through the ducts above the opening, forming a “curtain” of heated air. A portion of the heated air is drawn toward the rear of the cabinet, warming each pan.

- Perfect for holding wrapped or sealed product like tortillas, burritos and ribs, as well as product on sheet pans like biscuits, hamburger patties and baked potatoes or fried foods in pans
- Available in 2-pan and 3-pan models, single opening or pass-through, with or without humidity
- The FS2HAC-15 holds 6, 1/3 size pans (pans not included)
- The 2-pan pass-through accommodates two full-size sheet pans or four half-size sheet pans, and the 4-pan unit accommodates four full-size sheet pans or eight half-size sheet pans
- FS2HAC-15 comes standard with a pan rack, removable crumb tray, USB port and a touch screen control with temperature and timer display, and a 6' cord and plug



FS2HAC-15 with
1/3 size food pans
(pans not included)



FS2HAC-4PT with
accessory food pans



FSHAC-3 with
accessory food pans

HEATED AIR CURTAIN CABINETS

Model	Description	Dimensions (W x D x H)	Cabinet Opening	Voltage	Hz	Watts	Ship Weight	List Price ⁺
		Height includes 102 mm legs	Dimensions (W x H)					
FSHAC-2*	2-Tier Warmer	257 x 581 x 460	464 x 232 mm	220, 240	50/60	1750	46 kg	\$5799
FSHAC-3*	3-Tier Warmer	257 x 581 x 775	464 x 460 mm	220, 240	50/60	1750	48 kg	6053
FS2HAC-15	Open Cavity Warmer	394 x 539 x 552	375 x 330 mm	220, 240	50/60	1105	38 kg	5408
FS2HAC-2PT*	2-Tier Pass Through	613 x 994 x 468	459 x 206 mm	220, 240	50/60	2538-3022	80 kg	8802
FS2HAC-4PT*	4-Tier Pass Through	613 x 994 x 671	464 x 410 mm	220, 240	50/60	3338-3362	96 kg	9611

* Height includes 4" legs.

⁺ Available with CE Mark, at no added charge.

All Air Curtain Models Feature:



Cord Location: FSHAC-2, -3: Top of unit towards the back, middle.

FS2HAC-15: Top of unit towards the back, right side.

FS2HAC-2PT, -4PT: Top of unit towards the back, left side.

FOOD PANS AND TRIVETS – PAGE 189

COLORS AND FINISHES – INSIDE BACK COVER



Toasters

*Buffets • Supermarkets & Delis • Restaurants & Cafés
Clubs & Bars • Catering • Concessions*



ITQ-1750-2C pg. 160



TQ3-2000 In standard *Designer Black* pg. 161



TQ3-500 in optional *Stainless Steel* pg. 161



TQ-10 pg. 162



TK-100 King® pg. 164



TQ-805 pg. 165

Intelligent Toast-Qwik®

Hatco's Intelligent Toast-Qwik® allows the operator to toast multiple products at the touch of the button, changing easily from bagels to croissants to Texas toast to hash browns, as well as melting cheese and finishing smaller food products. The unit can easily take the place of the current toasting platform and add versatility and future menu expansion, along with energy efficiency and cost savings.

- The conveyor toaster can operate in four different modes:
 - ~ Continuous Throughput
 - ~ Select Single Item Mode
 - ~ In and Reverses Out Mode
 - ~ In, Pause, then Continues Through
- USB port located on the front allows for easy transfer of information, such as program changes and product usage information
- The ability to program up to twenty product settings

- Hatco's patented ColorGuard Sensing System monitors and adjusts conveyor speed and temperature during high usage periods to ensure toast color uniformity
- Using Hatco's Spot-On® Technology, the toaster senses when product is placed on the conveyor and activates the unit
- Easy to clean, with removable crumb tray and collector ramp. There is minimal operator maintenance required, with self-cleaning elements and no maintenance motor and conveyor drives



ITQ-875-1C



ITQ-1000-1C



ITQ-1750-2C

Model†	Dimensions W x D x H	Opening Dimensions W x H	Watts	Voltage	Amps	Capacity/ minute†	Ship Weight	List Price
ITQ-875-1C	370 x 727 x 420 mm	154 x 56 mm	2700	230	11.8	15	41 kg	\$6585
ITQ-1000-1C*	450 x 727 x 457 mm	240 x 51 mm	3600	230	15.7	17	40 kg	6725
ITQ-1750-2C*	513 x 728 x 470 mm	two openings at 150 x 56 mm	4960	230	21.6	30	48 kg	8933

* CE Mark available at no charge.

† Toasting capacity may vary by product. Toasting of coated products not recommended.

* Cord without plug.

All Models Feature:


Cord Location: Back of unit, lower left center.

OPTIONS (available at time of purchase only)

ITQ-SCHUKO	CEE 7/7 SCHUKO in lieu of No Plug (model ITQ-1000-1C only)	\$43
------------	---	------

ACCESSORIES (available for purchase at any time)

Paddle, with high temp, non-stick coating –		
ITQ1C-PAD	229 mm wide Food Paddle for ITQ-1000-1C model only	\$200
ITQ2C-PAD	144 mm wide Food Paddle for ITQ-1750-2C models only	153
ITQ2CFEED175	Feed Ramp for ITQ-1750-2C only	93


ITQ2C-PAD
Accessory


Toast-Qwik® Conveyor Toasters

Hatco's industry-leading Toast-Qwik® Toasters have been completely redesigned to provide a great new look, easy to use touchscreen controller, and increased production capabilities. They continue to provide the best reliability, flexibility, and value of any conveyor toaster available!

- Patented ColorGuard Sensing System monitors chamber temperature and adjusts conveyor speed to ensure consistent toast results - even in your busiest periods
- Dynamic new touchscreen controller that is easier to see and use!
- Up to 12 programmable settings for precise and instant product changes
- USB port for easy uploads of program changes and software updates
- Unique new toast delivery ramp moves your product to the storage tray each and every time
- Crumb tray is removable for easy cleaning
- 51 mm high opening standard - 76 mm high opening available on the TQ3-500H, TQ3-900H and TQ3-2000H models for thicker bread products



TQ3-2000
shown in standard
Designer Black



TQ3-500
shown in optional
Designer Warm Red



TQ3-900H
shown in optional
Stainless Steel

HORIZONTAL CONVEYOR TOASTERS

Model	Dimensions (W x D x H) <i>Height includes legs</i>	Opening Dimensions W x H	Voltage	Watts	Ship Weight	List Price [†] 220, 240V
Toasts Two Slices Wide						
TQ3-500	374 x 524 x 435 mm	258 x 51 mm	220- 240	2031-2220	25 kg	\$3036
TQ3-500H	374 x 524 x 435 mm	258 x 76 mm	220- 240	2031-2220	25 kg	3036
TQ3-900	374 x 524 x 435 mm	258 x 51 mm	220- 240	2763-3020	23 kg	3240
TQ3-900H	374 x 524 x 435 mm	258 x 76 mm	220-240	2763-3020	25 kg	3240
Toasts Three Slices Wide						
TQ3-2000*	475 x 536 x 435 mm	359 x 51 mm	220-240	3678-4020	30 kg	\$4069
TQ3-2000H*	475 x 536 x 435 mm	359 x 76 mm	220-240	3678-4020	30 kg	4069

* Available with CE Mark, add \$100.

* Cord without plug.

All Horizontal Conveyor Models Feature:

Cord Location: 1829 mm cord – back of unit, lower right corner.

OPTIONS (available at time of purchase only)


Designer Colors – Non-standard colors are non-returnable – Designer Black Standard –

SS	Stainless Steel	\$249
WRED	Designer Warm Red	No Charge
SSINSERT	Stainless Steel toast tray insert	48
TQ3-RAMP	Extended feed ramp in lieu of existing ramp - adds 76 mm	128
TQ3-RAMP-XL	XL extended feed ramp in lieu of existing ramp - adds 229 mm (on TQ3-500 and -900 models only)	48

COLORS AND FINISHES – INSIDE BACK COVER

TQ3 TOASTER AMP RATINGS

Model	220V 60Hz	240V 50/60Hz
TQ3-500	9.2	9.7
TQ3-500H	9.2	9.7
TQ3-900	12.1	13.1
TQ3-900H	12.1	13.1
TQ3-2000	16.7	16.8
TQ3-2000H	16.7	16.8



Toast-Qwik® Conveyor Toasters

Flexibility and performance are yours with the Hatco Toast-Qwik® conveyor toasters. These toasters produce perfect golden toasting, from 300 to 1800 slices per hour. The power save mode conserves energy during non-peak serving times.

- Instant and precise adjustment of toast color with electronic infinite controls that regulate top and bottom heat
- Hatco's patented ColorGuard sensing system assures toast uniformity
- Opening height for H and HBA models is 76 mm, for all other models the opening height is 51 mm
- Insulation and an interior fan provide cool surface temperatures
- Efficient design of front or rear discharge allows unit to be placed where it is most convenient – for sending product to the operator side or to the customer/server side
- BA models toast one side only and are for bagels and buns, cut side up



TQ-10



TQ-400



TQ-1800H

TOAST-QWIK® HORIZONTAL CONVEYOR TOASTERS

Model	Dimensions W x D x H (Height includes legs)	Opening Dimensions W x H	Amps 50/60Hz	Voltage	Watts 220V 240V	Capacity/ Minute†	Ship Weight	List Price‡
TQ-10	368 x 451 x 349 mm	265 x 51 mm	8.5-8.9	220, 240	1866 2221	5 slices	19 kg	\$1891

TOAST-QWIK® HORIZONTAL CONVEYOR TOASTERS

Model	Dimensions W x D* x H (Height includes legs)	Opening Dimensions W x H	Amps 50/60Hz	Voltage	Watts 220V 240V	Capacity/ Minute†	Ship Weight	List Price‡
TQ-400	368 x 451 x 378 mm	263 x 51 mm	8.5-8.8	220, 240	1860 2210	6 slices	21 kg	\$2924
TQ-400BA*	368 x 451 x 378 mm	263 x 51 mm	8.0-8.4	220, 240	1765 2100	6 slices	21 kg	2924
TQ-400H	368 x 451 x 403 mm	263 x 76 mm	9.7-10.0	220, 240	2130 2210	6 slices	21 kg	2924
TQ-800	368 x 578 x 422 mm	265 x 51 mm	13.7-14.4	220, 240	3019 3593	14 slices	29 kg	3327
TQ-800BA*	368 x 578 x 422 mm	265 x 51 mm	12.7-13.3	220, 240	2791 3321	14 slices	28 kg	3327
TQ-800H	368 x 578 x 422 mm	265 x 76 mm	13.7-14.4	220, 240	3019 3593	14 slices	29 kg	3327
TQ-800HBA*	368 x 578 x 422 mm	265 x 76 mm	12.7-13.3	220, 240	2791 3321	14 slices	29 kg	3327

Toasts Three Slices Wide

TQ-1800	470 x 577 x 421 mm	367 x 51 mm	17.0-17.7	220, 240	3731 4440	30 slices	33 kg	\$4130
TQ-1800BA*	470 x 577 x 421 mm	367 x 51 mm	17.5-18.3	220, 240	3849 4580	30 slices	34 kg	4130
TQ-1800H	470 x 577 x 421 mm	367 x 76 mm	17.8-18.6	220, 240	3907 4650	30 slices	34 kg	4130
TQ-1800HBA*	470 x 577 x 421 mm	367 x 76 mm	17.5-18.3	220, 240	3849 4580	30 slices	34 kg	4130

* Available with CE Mark, add \$50. CE Mark available for TQ-10 220, 240V at no charge.

† Toasting capacity may vary by product. Toasting of coated products not recommended.

• TQ-400 and TQ-400BA, add 64 mm to depth if using tray extension in rear.


TQ-800, TQ-800BA, TQ-800H, TQ-800HBA, TQ-1800, TQ-1800BA, TQ-1800H and TQ-1800HBA add 165 mm to depth if using tray extension in rear.

▼ BA models toast one side only and are for bagels and buns, cut side up.

All Toast-Qwik® Models Feature:

Cord Location: 1829 mm - back of unit, lower right corner.

OPTIONS AND ACCESSORIES – PAGE 163

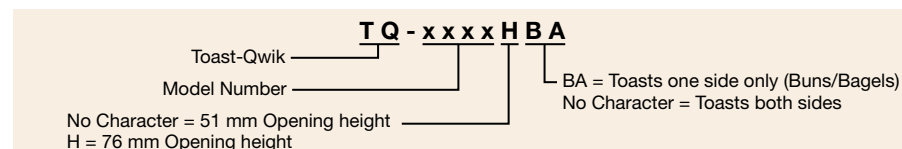

TQ TOASTER AMP RATINGS

Model	220V 50Hz/1 Ø	240V 50/60Hz/1 Ø
TQ-10	8.5	9.3
TQ-400	8.5	9.2
TQ-400BA	8.0	8.8
TQ-400H	9.7	9.2
TQ-800	13.7	15.0
TQ-800BA	12.7	13.9
TQ-800H	13.7	15.0
TQ-800HBA	12.7	13.9
TQ-1800	17.0	18.5
TQ-1800BA	17.5	19.1
TQ-1800H	17.8	19.4
TQ-1800HBA	17.5	19.1



TQ-800H Toast Qwik®
Horizontal Conveyor Toaster

Toasters

OPTIONS (available at time of purchase only, excludes TQ-10)

TQ-PWR-A	Automatic power save mode (Switches to power save mode after 30 minutes of inactivity)	No Charge
-----------------	---	------------------

ACCESSORIES (available for purchase at any time)

TQRAMP	Extended feed guide (Add 76 mm) (excluding TQ-1800 models)	\$130
TQ2-SECURITY	Control cover and bracket (excluding TQ-1800 models)	120



TQ-800 with
TQ2-SECURITY
accessory security
control cover

Toast King® Conveyor Toasters

Designed for mid to high volume and constant flow applications, Hatco's proven reliability and performance makes the Toast King Toasters the workhorse of your operation. These toasters use conveyor speed, not temperature, to determine toast color.

- Toasts a variety of bread products
- Stainless steel construction for years of trouble-free service
- Power saving thermostat for energy savings during non-peak times
- Manual advance and speed control
- Fully insulated for cooler operation
- Toast storage area keeps bread warm and dry
- Capacity of 720-1500 slices per hour
- Three basket access for fast loading
- Top venting keeps heat away from the operator



TK-72



TK-135B

VERTICAL CONVEYOR TOASTERS

Model	Dimensions* W x D x H	Capacity/ Minute†	Basket Size	kW	Voltage	Ship Weight	List Price
Bread and Buns							
TK-72‡	464 x 448 x 845 mm	12 slices	254 W x 117 H mm	4.0	220, 240	33 kg	\$5064
TK-100‡	578 x 448 x 845 mm	16 slices	368 W x 117 H mm	5.0	220, 240	40 kg	5414
Buns Only							
TK-135B‡	578 x 448 x 845 mm	22 slices	368 W x 117 H mm	4.3	220, 240	40 kg	5416
3-Part Buns							
TK-155B	578 x 448 x 845 mm	25 slices	368 W x 117 H mm	5.0	220, 240	40 kg	5707

* Width includes 19 mm for manual advance knob. Depth includes tray extension of 89 mm.

† Toasting capacity may vary by product. Toasting of coated products not recommended.

‡ CE Mark available, add \$50.

All Vertical Conveyor Models Feature:

Max. Product Thickness: 32 mm.

Cord Location: 1219 mm Cord – Back of unit, lower left side.

OPTIONS (available at time of purchase only)


TK-SECURITY	Control cover, bracket, mounting hardware and fuse cover	\$122
-------------	--	--------------

ACCESSORIES (available for purchase at any time)

4"LEGS	102 mm adjustable legs (4)	\$60
--------	----------------------------	-------------

TK TOASTER AMP RATINGS

Model	220V/1 Ø 50 or 60 Hz	240V/1 Ø 50 or 60 Hz
TK-72	18.4	18.4
TK-100	22.9	21.0
TK-135B	19.7	18.1
TK-155B	22.8	20.9



High Watt Conveyor Toasters

Hatco High Watt Conveyor Toasters toast high moisture content bread products to a rich golden color. All models feature metal sheathed heating elements and most include cord and plug. Toast King toasters are shipped with speed control and manual advance.

- Toasts a variety of high moisture content bread products
- Full insulation for cooler operation
- Multiple metal sheathed toasting elements

- Toast storage area keeps bread warm and dry
- Capacity of 240 to 1080 slices per hour



TQ-805



TK-105

HIGH WATT CONVEYOR TOASTERS

Model [‡]	Dimensions W x D x H	kW	Voltage Single Phase	Hz	Capacity/ Minute [†]	Basket Size	Ship Weight	List Price
TQ-15	368 x 451 x 349 mm	2.2	220, 240	50	4 slices	—	19 kg	\$2000
TQ-405	368 x 451 x 378 mm [•]	2.3	220, 240	50	6 slices	—	22 kg	3184
TQ-805	368 x 578 x 422 mm [*]	3.6	240	50	12 slices	—	24 kg	3829
Includes Manual Advance and Speed Control								
TK-75	445 x 448 x 838 mm [•]	4.6	220, 240	50	12 slices	254 W x 117 H mm	35 kg	\$6037
TK-105	559 x 448 x 838 mm [•]	7.5	220, 240	50	18 slices	368 W x 117 H mm	40 kg	6220

[‡] CE Mark available, add \$50 on TQ-405, TQ-805, and TK-105.

[•] TQ-15 and TK-75 prices include CE (cannot be ordered without CE).

^{*} Tray extends 165 mm rear for TQ-405 and TQ-805, and 89 mm front for TK-75 and TK-105.

[†] Toasting capacity may vary by product. Toasting of coated products not recommended.

All High Watt Models Feature:

Max. Product Size: TQ-405, TQ-805: 244 W x 44 H mm.

Max. Product Thickness: TK-75, TK-105: 32 mm.

Cord Location: TQ Models: Lower right corner on back of unit.

TK Models: Lower left side on back of unit.

ACCESSORIES (available for purchase at any time)

4" LEGS	102 mm adjustable legs (4) (TK models only)	\$ 60
TQRAMP	Extends feed guide 76 mm longer (TQ models only)	130

TQ - x x x
Toast-Qwik ——— Model Number

TK - x x x
Toast King ——— Model Number

Induction Equipment

Cafeterias • Buffets
Supermarkets & Delis • Restaurants & Cafés
Clubs & Bars



IRNG-PC1-36 pg. 167



IRNG-PB1-36 pg. 168



IWRM-CD1-05 pg. 171



IWRM-B1-1313-05 in white glass-ceramic top
pg. 172

Rapide Cuisine® Countertop High-Powered/Heavy-Duty Induction Ranges

Hatco's Rapide Cuisine® High-Powered/Heavy-Duty Induction Range offers industry leading features and true back-of-house power in a commercial kitchen proof package.

The unit features our Magnetic Power System (MPS) to deliver the highest power in its class! It has User Programmable Presets (UPP) for repeat menu items and a food temperature probe for more accurate cooking, plus a timer, high resolution color display and convenient power and temperature modes.

- Commercial kitchen ready. Heavy gauge stainless steel housing with side impact protection for the top
- Four surface temperature sensors offer the most accurate control in its class
- Culinary equivalent of up to 31,000 BTUs gas
- High resolution TFT (thin film transistor) display instantly advises the operator of precise power (1 to 100), temperature (°F or °C in one degree increments) and time control (30 seconds to 10 hours)
- Programmable mode so the operator can create preset programs for consistent cooking cycles
- Includes a grease filter and conformal-coated boards
- Easy to use color-coded selectable functions
- Large adaptive control for precise, fine control (slow turns) to spanning the full range in a single twist (fast turns)
- Pan Sense Technology (PST) activates the unit only when a suitable pan is placed on top
- Patterned, glass-ceramic top that is durable, easy to clean and helps scratches from heavy use become less noticeable
- Easy to clean, fully-sealed top, stops grease or moisture from penetrating the unit, even if the top gets broken
- Automatic shut-off to prevent overheating
- Withstands high ambient kitchen temperatures (up to 51°C)
- USB port for downloading updates




IRNG-PC1-36



Includes a food temperature probe which facilitates highly accurate cooking

Close up of patterned black glass-ceramic top – helps prevent noticeable scratches due to heavy use



COUNTERTOP HIGH-POWERED/HEAVY-DUTY INDUCTION RANGES


Model	Dimensions W x D x H	Voltage Single Phase Only	Watts	Ship Weight	List Price
IRNG-PC1-36	352 mm x 471 mm x 94 mm	220-230-240*	3300-3600	10 kg	\$2266

* Available with CE Mark, no additional charge.

All Countertop High-Powered/Heavy-Duty Models Feature:

Models Shipped with: An 1800 mm cord and plug and a food temperature probe.

Cord Location: Rear left bottom base corner.



Rapide Cuisine® Drop-In High-Powered/Heavy-Duty Induction Ranges

Hatco's Rapide Cuisine® Drop-In High-Powered/Heavy-Duty Induction Range offers industry-leading features and true back-of-house power in a commercial kitchen-proof package.

The unit can be mounted flush or near flush with the optional trim ring. It features our Magnetic Power System (MPS) to deliver the highest power in its class! It has User Programmable Presets (UPP) for repeat menu items and a food temperature probe for more accurate cooking, plus a timer, high resolution color display and convenient power and temperature modes.

- Four surface temperature sensors offer the most accurate control in its class
- Culinary equivalent of up to 31,000 BTUs gas
- High resolution TFT (thin film transistor) display instantly advises the operator of precise power (1 to 100), temperature (°F or °C in one degree increments) and time control (30 seconds to 10 hours)
- Programmable mode so the operator can create preset programs for consistent cooking cycles
- Includes conformal-coated boards
- Easy to use color-coded selectable functions
- Large adaptive control for precise, fine control (slow turns) to spanning the full range in a single twist (fast turns)
- Pan Sense Technology (PST) activates the unit only when a suitable pan is placed on top
- Patterned, glass-ceramic top that is durable, easy to clean and helps scratches from heavy use become less noticeable
- Easy to clean, fully-sealed top stops grease or moisture from penetrating the unit, even if the top were to get broken
- Automatic shut-off to safely prevent overheating
- Withstands high ambient kitchen temperatures (up to 51°C)
- USB port for downloading updates



Includes a food temperature probe which facilitates highly accurate cooking

HIGH-POWERED/HEAVY-DUTY DROP-IN INDUCTION RANGES

Model	Dimensions W x D x H	Voltage Single Phase	Watts	Ship Weight	List Price
IRNG-PB1-36	343 mm x 368 mm x 91 mm	220-230-240*	3300-3600	11 kg	\$2390

*Available with CE Mark, no additional charge.

All Drop-In High-Power/Heavy-Duty Models Feature:

Models Shipped with: 1300 mm cables from the base unit to the control panel, an 1800 mm cord and plug, and a food temperature probe.

Cord Location: Rear right bottom base corner.

ACCESSORY (available for purchase at any time)

Holds unit nearly flush on the counter (for use where chair-step routing of a countertop material is not possible, but a flush mount look is desired) –

Trim Ring in Stainless Steel (holds unit nearly flush on a stainless steel or any similar material countertop)

TRIM-PB1-36 \$63



Rapide Cuisine® Countertop High- Powered/Heavy- Duty Dual Induction Ranges

Hatco's Rapide Cuisine® High-Powered/Heavy-Duty Dual Induction Ranges offer industry-leading features and true back-of-house power in a commercial kitchen proof package. These are dual units that are configured either front-to-back or side-to-side to optimize your countertop footprint.

The unit features optimization systems like Magnetic Power System (MPS) to deliver the highest power in its class; safety features like Pan Sense Technology (PST), which means the unit only activates when a pan is present; and convenience features like User Programmable Presets (UPP), where up to six menu items using three stages of cooking can be programmed and saved -- great for repeat menu items. You can also choose a power level and a doneness temperature target when using the food temperature probe(s).

- Food temperature probes for more accurate cooking
- Timers (up to 10 hours, more if in program mode)
- High resolution color displays
- Power (0-100) or temperature (°F or °C modes)
- Heavy gauge stainless steel housing with side impact protection for the top
- Eight surface temperature sensors
- Culinary equivalent of up to 31,000 BTUs gas per burner
- Grease filters
- Highest ambient tolerance on the market 51°C- it's tough
- USB ports for downloading updates



IRNG-PC2F-36

Front-to-back configuration shown




IRNG-PC2S-36

Side-to-side configuration shown

Includes food temperature probes which facilitates highly accurate cooking



Close up of patterned black glass-ceramic top – helps prevent noticeable scratches due to heavy use



COUNTERTOP DUAL HIGH-POWERED/HEAVY-DUTY DUAL INDUCTION RANGES


Model	Configuration	Dimensions W x D x H	Voltage Single Phase	Watts (per coil)	Total Power (watts)	Ship Weight	List Price
Front to Back Range							
IRNG-PC2F-18	Front to Back	356 x 753 x 125 mm	220/230/240 [±]	1650/1725/1800	3300/3450/3600	19 kg	\$4434
IRNG-PC2F-36	Front to Back	356 x 753 x 125 mm	220/230/240 [±]	3300/3450/3600	6600/6900/7200	19 kg	4925
Side to Side Ranges							
IRNG-PC2S-18	Side to Side	630 x 484 x 114 mm	220/230/240 [±]	1650/1725/1800	3300/3450/3600	18 kg	\$4434
IRNG-PC2S-36	Side to Side	630 x 484 x 114 mm	220/230/240 [±]	3300/3450/3600	6600/6900/7200	18 kg	4925

*Available with CE Mark, no additional charge.

All Countertop High-Powered/Heavy-Duty Dual Models Feature:

Models Shipped with: Two temperature probes and an 1800 mm cord and plug.

Cord Location: Rear left bottom base corner.

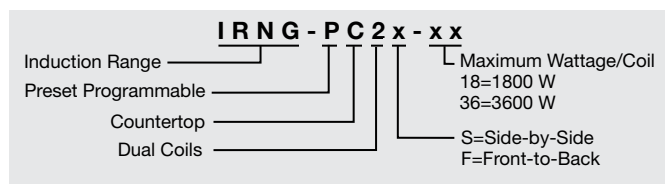

Rapide Cuisine® Drop-In High- Powered/Heavy- Duty Dual Induction Ranges

Hatco's Rapide Cuisine® High-Powered/Heavy-Duty Drop-In Dual Induction Ranges offer industry-leading features and true back-of-house power in a commercial kitchen proof package. These are dual units that are configured either front-to-back or side-to-side to optimize your countertop footprint.

The unit features optimization systems like Magnetic Power System (MPS) to deliver the highest power in its class; safety features like Pan Sense Technology (PST), which means the unit only activates when a pan is present; and convenience features like User Programmable Presets (UPP), where up to six menu items using three stages of cooking can

be programmed and saved -- great for repeat menu items. You can also choose a power level and a doneness temperature target when using the food temperature probe(s).

- Food temperature probes for more accurate cooking
- Timers (up to 10 hours, more if in program mode)
- High resolution color displays

- Power (0-100) or temperature (°F or °C modes)
- Heavy gauge stainless steel housing with side impact protection for the top
- Eight surface temperature sensors
- Culinary equivalent of up to 31,000 BTUs gas per burner
- Grease filters
- Highest ambient tolerance on the market 51°C (124°F)- it's tough
- USB ports for downloading updates



IRNG-PB2-36

IRNG-PB2-36
control panel


Includes food temperature probes which facilitate fast and highly accurate cooking

DROP-IN HIGH-POWERED/HEAVY-DUTY DUAL INDUCTION RANGES

Model	Dimensions W x D x H	Voltage Single Phase	Watts (per coil)	Total Power (watts)	Ship Weight	List Price
IRNG-PB2-18	350 mm x 699 mm x 157 mm	220/230/240*	1650/1725/1800	3300/3450/3600	19 kg	\$4042
IRNG-PB2-36	350 mm x 699 mm x 157 mm	220/230/240*	3300/3450/3600	6600/6900/7200	19 kg	4362

*Available with CE Mark, no additional charge.

All Drop-In High-Powered/Heavy-Duty Dual Models Feature:


Models Shipped with: Two 700 mm cables from the base to the control, an 1800 mm cord and plug, and two food temperature probes.

Cord Location: Rear left bottom base corner.

ACCESSORIES (available for purchase at any time)

Holds unit nearly flush on the counter (for use where chair-step routing of a countertop material is not possible, but a flush mount look is desired) –

Trim Ring in Stainless Steel (holds unit nearly flush on a stainless steel or any similar material countertop) **\$124**

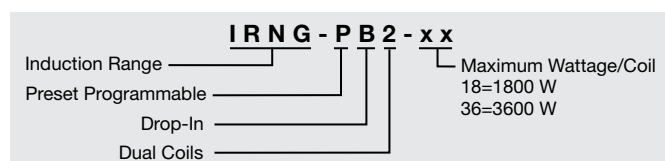

Palletti® Countertop Induction Warmers

Hatco's Palletti® Countertop Professional Induction Warmers offer a safe, efficient and attractive way to keep hot foods hot. Perfect for serving applications such as buffet lines and hospitality suites. The warmer has five simple and precise settings, which allow for a wide variety of foods to be held both safely and at optimum quality. The units are also memory retentive, so once turned off and back on, the last setting will resume.

This unit has a low-profile and ultra-thin design in all black so the focus remains on the food rather than the equipment.

- Portable and adaptable for buffets and many other front-of-the-house applications to give the most attractive and visible food presentations
- Energy efficient, quiet and safe operation with no open flames as with traditional warming presentations
- Pan Sense Technology (PST) activates the unit only when a suitable pan is placed on top
- Contemporary, low-profile design with a bold black housing and durable, black glass-ceramic top that is easy to clean
- Features a control panel with a standby key, temperature control arrow keys and temperature setting indicators
- Automatic shut-off to safely prevent overheating
- Low wattage warmers can be interconnected (daisy chain) with multiple units to one electrical outlet resulting in greater energy efficiency



IWRM-CD1-05
(Shown with three Daisy Chain Countertop Induction Warmers interconnected to one power cord)

DAISY CHAIN COUNTERTOP INDUCTION WARMERS

Model	Dimensions W x D x H	Voltage Single Phase	Watts	Amps	Ship Weight [†]	List Price
IWRM-CD1-05	330 x 450 x 57 mm	220/230/240 [‡]	500	2.3/2.2/2.1	6 kg	\$1243

[†]Shipping weights are approximate.

[‡]Available with CE Mark, no additional charge.


All Daisy Chain Countertop Induction Warmers Feature:

Maximum number of interconnected units: 4 or 5 units (depending on voltage).

Models Shipped with: An 1800 mm cord and plug and a 432 mm interconnecting cord.

Cord Location: Rear right bottom base corner.

Interconnecting Cord Location: Rear left and right bottom base corner.



Palletti® Drop-In Induction Warmers

Hatco's Palletti® Drop-In Professional Induction Warmers offer a safe, efficient and attractive way to keep hot foods hot. Perfect for serving applications such as buffet lines and hospitality suites. The warmer has five simple and precise settings, which allow for a wide variety of foods to be held both safely and at optimum quality. The units are also memory retentive, so once turned off and back on, the last setting will resume.

This unit can be mounted flush or near flush with the optional Trim Ring.

- Adaptable for buffets and many other front-of-the-house applications to give the most attractive and visible food presentations
- Pan sense technology (PST) activates the unit only when a suitable pan is placed on top
- Once installed the glass-ceramic top never needs to be removed. For service or replacement, the lower housing can be removed separately
- Features a control panel with a standby key, temperature control arrow keys and temperature setting indicators
- Energy efficient, quiet and safe operation
- Choose black or white glass-ceramic top which is durable and easy to clean
- Features safety and convenience, such as the automatic shut-off to prevent overheating
- Includes remote control panel and cord



DROP-IN INDUCTION WARMERS

Model	Dimensions W x D x H	Glass-Ceramic Top	Voltage Single Phase	Watts	Amps	Ship Weight [†]	List Price
IWRM-B1-1313-05	330 x 330 x 108 mm	Black	220/230/240 [‡]	500	2.3/2.2/2.1	6 kg	\$1119
IWRM-B1-1313-05	330 x 330 x 108 mm	White	220/230/240 [‡]	500	2.3/2.2/2.1	6 kg	1119

[†]Shipping weights are approximate.

[‡]Available with CE Mark, no additional charge

All Drop-In Induction Warmers Feature:

Models Shipped with: A 1000 mm cable from the base to the control and an 1800 mm cord and plug.


Cord Location: Rear left bottom base corner.

ACCESSORIES (available for purchase at any time)

Trim Ring or Flush Mount Brackets for use where chair-step routing of a countertop material is not possible, but a flush mount look is desired –

TRIM-IWRM-1B	Trim Ring in Stainless Steel (holds unit nearly flush on a stainless steel or any similar material countertop)	\$57
IWRM-FLUSHBKT	Flush Mount Kit (Undermount leveling brackets, used with a solid material or stainless steel countertop)	74

NOTE: Three installation options for a flush or near-flush look: see manual for details.

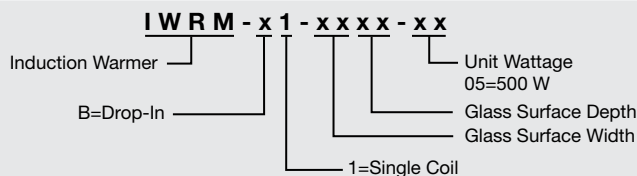

Light Cooking Equipment

*Supermarkets & Delis • Restaurants & Cafés
Clubs & Bars • Concessions*



SNACK-1 with accessory Chelky plate *pg. 174*



SNACK-2 with accessory Chelky plate *pg. 174*



FWM-1B *pg. 175*



SAL-1 with accessory food pan *pg. 176*

Snack System

The Hatco/Suntec Snack System will help expand your menu and your sales. With a single or dual electric baker, you can easily switch the interchangeable plates to serve breakfast items, lunch foods and a variety of snacks in between. Freshly bake as many or few items as you need, resulting in no waste at the end of the day. Add more variety to your menu in small quantities and increase sales according to the season, time of day and location.

NOTE: Comes with standard Round Belgian Waffle Plates and one additional set of plates of your choosing.

- Adjustable time/temperature controls enable operators to cook continuous, consistent quality products
- Exclusive heating elements provide exceptional heat distribution throughout the entire cooking plate, ensuring even cooking of each product
- Four programmable preset buttons for each cooking cycle. A cooking cycle consists of three different settings:
 - Temperature
 - Time
 - Top Cooking Plate Power
- One-touch release with latch opener for easy plate replacement
- Removable plates are easily cleaned with warm, soapy water
- Compact design is suitable for any location
- Adjustable temperature allows for multiple menu options



SNACK-1 with accessory Chelky plate



SNACK-2 with standard Belgian plate

SNACK SYSTEM

Model	Description	Dimensions (W x D x H)	Voltage	Watts	Amps	Shipping Weight	List Price
SNACK-1	Single	264 x 446 x 203 mm	220-230-240	823-900-980	3.7-3.9-4.0	11 kg	\$1710
SNACK-2	Double	537 x 446 x 203 mm	220-230-240	1647-1800-1960	7.5-7.8-8.2	19 kg	2770

All Hatco/Suntec Snack System Models Feature:

Models Shipped with: A cleaning brush, tool for switching out plates, standard Round Belgian Waffle Plates and an additional set of plates of your choosing.

Cord Location: Back of unit, bottom left-hand side.

ACCESSORIES

(available for purchase at any time)

Interchangeable Cooking Plates –

FREESTYLE	Freestyle Plates	\$285
BELGIAN	Belgian Plates	285
COFFEEBEAN	Coffee Bean Plates	285
SANDWICH	Sandwich Plates	285
PANINI	Panini Plates	285
DONUT	Donut Plates	285
CHELKY	Chelky Plates	285
WM-BRUSH	Nylon Brush	\$20



Freestyle



Belgian



Coffee Bean



Sandwich



Panini



Donut



Chelky



WM-BRUSH
accessory

SNACK - x

Snack System ——— 1 = Single Head
2 = Dual Head

Flip Waffle Maker

Hatco/Suntec Flip Waffle Makers produce excellent, authentic 32 mm thick, round Belgian waffles. Their unique heating elements and 180° swivel mechanism ensure even cooking, while a thermostatic control and a programmable timer deliver consistent, repeatable results. Adjustments to temperature and time can be made to suit any batter and the unit is memory retentive so you may only have to program it once.

- Commercial food service quality – designed for many hours of continuous use, every day
- Heavy duty stainless steel construction with Teflon® coated aluminum plates
- Simple push-button control panel features a stand-by on/off, timer/temperature toggle, higher/lower selection, and start
- Easy to see bright red LED display shows settings and countdown when cooking
- Timer starts automatically when waffle maker is closed and resets when opened, while a beeper signals the end of a cooking cycle
- Fast initial heat up time, excellent heat retention and recovery delivers high productivity

Standard Round
Belgian Plate 178 mm



Mini Round Waffle Plate
available as accessory
Four 119 mm



FWM-1B

FLIP WAFFLE MAKER

Model	Item Number	Description	Dimensions (W x D x H)	Voltage	Watts	Amps	Ship Weight	List Price
FWM-1B	FWM1B.515	Round	295 x 581 x 295 mm	220-240	1235-1470	5.7-6.2	12 kg	\$2201


All Hatco/Suntec Flip Waffle Maker Models Feature:

Models Shipped with: cord and plug.

Cord Location: Back of unit, lower left side.

ACCESSORIES (available for purchase at any time)

WM-BRUSH	Nylon Brush	\$20
WAF-FORK	Waffle Fork	7
MINI-WAFFLE	Mini Waffle Plate	88



Electric Salamander

Hatco's Electric Salamander gives you versatility in the kitchen with the capability to cook, grill, reheat and keep foods hot. The plate detection feature activates the instant-on heating elements automatically when a food plate comes into contact with the plate detection bar.

- Ready to use in just eight seconds
- Three independently-controlled Instant-On heating elements provide the benefits of on-demand cooking and energy conservation
- Adjustable upper housing gives 114.3 mm of vertical movement for maximum versatility
- Features high-powered infrared ribbon heating elements
- Heating elements are on only when a cook or hold cycle has been activated, eliminating residual heat in the kitchen environment
- The HOLD function has eight programmable heat levels - ideal for keeping food hot or for reheating food
- Features a flat, touch control panel and stainless steel construction



ELECTRIC SALAMANDER

Model	Dimensions W x D x H*	Cooking Area W x D	Voltage	Hz	Watts	Ship Weight	List Price†
SAL-1	577 x 552 x 606 mm	555 x 349 mm	240/415	50/60	4500	65 kg	\$7278


* Height includes 102 mm legs. Add 51 mm to depth for wall mounted units.

† CE Mark available at no charge.

The Electric Salamander Model Features:

Models Shipped with: Cooking grate, drip pan, wall mounting hardware, 102 mm adjustable black plastic legs and cord with no plug.

Power Inlet Location: Back of unit, bottom right side.



**Saves Energy,
Saves Money,
Protects your Reputation!**

Do your bit for Global Warming with Hatco's SAL-1. The Hatco Electric Salamander's elements are ready for use in just eight seconds. How does that work? Mounted on the back wall of the Salamander is a "plate detection" switch that keeps the unit from turning on unless a plate or pan is put underneath, against this bar. That means the elements are only on when they need to be. Most kitchens have every piece of equipment on all day, firing out heat and constantly using energy. Even in power save mode, most equipment is never fully off. Not the Electric Salamander. It's 100% off when not in use, saving money, energy and the environment.

Water Heaters

*Cafeterias • Convenience Stores
Supermarkets & Delis • Restaurants & Cafés
Clubs & Bars • Catering • Concessions*



3CS-9B with optional temperature monitor *pg. 178*



FR-9B *pg. 179*



FR-9 *pg. 179*



C-24 *pg. 180*



C-27 *pg. 180*



S-57 with optional Stainless Steel body and base, and accessory Stainless Steel legs *pg. 182*

3CS Sanitizing Sink Heaters

Maintaining a continuous supply of sanitizing rinse water without taking up valuable space, the 3CS makes manual warewashing faster and more convenient. Drain may be plumbed to open-sight waste drain. A special 3CS Sink Heater is available for shipboard use under military spec. (Mil-H-43895B). Consult factory for prices.

- Stainless steel front, powdercoated silver-gray hammertone body and convenient side drain
- Equipped with an Energy Cut-Off (ECO) for built-in protection against higher than normal water temperature
- On/Off toggle switch with indicator light to indicate power status, and a red light to indicate the need to refill and reset the unit
- Meets NSF standard of 82°C for dish sanitizing



3CS-9 with optional temperature monitor

SANITIZING SINK HEATERS

Model	kW	Sink Area	Phase	Ship Weight	List Price
3CS-3 [†]	3.0	381 mm Sq. or less	1	11 kg	\$2886
3CS-4 [†]	4.5	406-457 mm Sq.	1	11 kg	2906
3CS-6 [†]	6.0	483-533 mm Sq.	1	12 kg	2961
3CS-9 [†]	9.0	533-635 mm Sq.	1	12 kg	3066
3CS-3B [‡]	3.0	381 mm Sq. or less	Balanced 3	14 kg	3286
3CS-4B	4.5	406-457 mm Sq.	Balanced 3	14 kg	3286
3CS-6B [‡]	6.0	483-533 mm Sq.	Balanced 3	14 kg	3286
3CS-9B [‡]	9.0	533-635 mm Sq.	Balanced 3	15 kg	3286

[†] 240V available with CE Mark, add \$60.

[‡] 380V and 415V available with CE Mark, add \$60.

All Sink Heater Models Feature:

Voltage: 240, single phase and 240, 380 (no 4kW) or 415 (no 4kW), three-phase.

480 three-phase available (add \$112).

Dimensions: 3CS-3, -4, -6, -9: 171 W x 429 D x 321 H mm.

3CS-9 480V: 203 W x 435 D x 321 H mm.

3CS-3B, -4B, -6B, -9B: 203 W x 435 D x 321 H mm.

Models Shipped with: Stainless steel front, silver gray hammertone body and black base.

WATER QUALITY REQUIREMENTS – PAGE 190

OPTIONS (available at time of purchase only)

SSBB	All Stainless Steel Body and Base	\$135
TEMP MON [▲]	Temperature Monitor (built-in)	139
TEMP LIGHT [▲]	Temperature Light	106
FR-SECURITY	Security Package (Torx® Screws and Control Cover)	204
3CS-480V	480 Volt	112

ACCESSORIES (available for purchase at any time)


FR-FLUSH	Flush Hose, Stopper and Adapter	\$91
----------	---------------------------------	------

[▲]Specify either monitor or light, not both.

SIZING INFORMATION

For a Sink Heater: 2,2 watts per square cm of vessel top.

3CS Sink Heaters are sized based on 60°C supply water with a 30 minute preheat period to reach the sanitizing temperature. Sink Heaters are mounted into the third compartment sink with standard plumbing fittings provided. Two 51 mm diameter holes are required for these fittings and a full size template is provided to locate holes in the sink. The 3CS Sink Heater is easily attached to the plumbing fittings with self-contained unions.



3CS - x B

Three Compartment Sink

Balanced 3-Phase

Kilowatt Rating

FR Food Rethermalizer/ Bain-Marie Heaters

The Hatco FR is a Bain-Marie or food reconstitutor to heat or hold foods at safe temperatures between 60°C and 88°C). All models are shipped factory assembled, pre-wired and include standard 51 mm stainless steel plumbing fittings for mounting into a holding tank. Drain may be plumbed to open-sight waste drain.

- Equipped with an Energy Cut-Off (ECO) for built-in protection against higher than normal water temperature
- Stainless steel tank with five year limited warranty
- Optional low-water cut-off (LWCO) available to prevent element burn out from low water conditions
- Separate sump and heating compartment drains for cleaning and sanitizing



FR-9

FOOD RETHERMALIZER/BAIN-MARIE HEATERS

Model	kW	Phase	Ship Weight	List Price [†]
FR-3	3.0	1	11 kg	\$2646
FR-4	4.5	1	11 kg	2676
FR-6	6.0	1	13 kg	2951
FR-9	9.0	1	13 kg	3026
FR-3B	3.0	Balanced 3	14 kg	3236
FR-4B	4.5	Balanced 3	15 kg	3236
FR-6B	6.0	Balanced 3	14 kg	3236
FR-9B	9.0	Balanced 3	14 kg	3236

[†] CE Mark available, add \$60. Requires Low-Water Cut-Off, add \$227.
(excludes FR-4, FR-4B and FR-9)

All Food Rethermalizer Models Feature:

Voltage: 240, single phase and 240, 380-415 (no 4kW) or 415 (no 4kW), three-phase.
480 three-phase available (add \$ 112).

Dimensions: FR-3, -4, -6, -9: 171 W x 429 D x 312 H mm.

FR models with 480V and Low Water Cut-Off: 203 W x 435 D x 312 H mm.

FR-3B, -4B, -6B, -9B: 203 W x 435 D x 312 H mm.

Models Shipped with: Stainless steel front, silver gray hammertone body and black base.

WATER QUALITY REQUIREMENTS – PAGE 190

OPTIONS (available at time of purchase only)

SSBB	All Stainless Steel Body and Base	\$135
W/LW	Low-Water Cut-Off (required on CE models)	227
FR-SECURITY	Security Package (Torx® Screws and Control Cover)	204
FR-480V	480 Volt	112

ACCESSORIES (available for purchase at any time)



FR-FLUSH	Flush Hose, Stopper and Adapter	\$91
----------	---------------------------------	------

SIZING INFORMATION

For a Bain-Marie or steam table: 0,8 watts per square cm of vessel top.

For a Food Rethermalizer: 2,2 watts per square cm of vessel top.

Use one FR for a Bain-Marie up to 1829 mm long. Units over 1829 mm require a minimum of two FRs. (Tank Baffle provided by installer.)



Compact Electric Booster Water Heaters

Compact models provide all the 82°C final rinse water to sanitize and flash-dry dishes and flatware. Models include stainless steel front panel, silver gray hammertone body, black base and standard 152 mm legs. Slide brackets for mounting under a dishtable are available. The Castone® lined tank is standard on all models and has a 23-liter capacity.

- The Compact Electric Booster is easy to install next to a dishwasher to save space, either on 152 mm plastic legs or with slide brackets
- All models include a Castone® lined tank with a 10-year limited warranty, and fiberglass insulation to minimize heat loss

- Swing-away front panels with low-water cut-off (LWCO), control fuses and transformer allow quick access to probes and elements, for easier serviceability

NOTE: Single phase is uncommon in heaters 24kW and larger and are NOT returnable.



C-18 with optional Stainless Steel body and base



C-45

COMPACT ELECTRIC BOOSTER WATER HEATERS

							List Price	
Model*	kW	240V Single Ph	240V Three Ph	380 or 415V [‡] Three Ph	480V Three Ph	Ship Weight	240V	380 or 415V or 480V
Small								
C-4	4	—	—	—	▼	52 kg	\$3831	\$3831
C-5	5		—	—	▼	52 kg	3881	3881
C-6	6					54 kg	3951	3951
C-7	7					54 kg	4006	4006
C-9	9					54 kg	4046	4046
C-12	12					54 kg	4281	4281
C-13	13.5			■		55 kg	4311	4311
C-15	15					55 kg	4366	4366
C-17	17.25	—		—	—	54 kg	4396	4396
C-18	18					55 kg	4431	4431
Large								
C-24	24					64 kg	\$5896	\$5896
C-27	27					64 kg	5986	5986
C-30	30					65 kg	6041	6041
C-36	36					64 kg	6316	6236
C-39	39					65 kg	6431	6346
C-45	45					64 kg	7156	7066
C-54	54	—			▲	65 kg	7356	7261
C-57	57	—				65 kg	7501	7401

* Only 6, 7, & 9kW models can be field converted to single phase (units are shipped 3-phase open delta). Larger branch circuit required than for balanced 3-phase of equal kW. (Balanced 3-phase available in 4-6 & 9kW models, consult factory.) 240 volt only.

▼ 480V available in single phase only. Consult factory if Balanced 3 Ph is required.

■ 380V not available.

▲ 380V has 49kW.

All Compact Electric Booster Models Feature:

Voltage: 240, single phase. 240, 380, 415 or 480, three phase.

Dimensions: Models C-4 through C-18: 330 W x 527 D x 502 H mm.

Add 133 mm to depth for temperature/pressure relief valve. Height includes legs.

Models C-24 through C-57: 457 W x 610 D x 457 H mm.

Add 165 mm to depth for temperature/pressure relief valve. Height includes legs.

Models Shipped with: Castone® tank, low-water cut-off (LWCO), temperature/pressure relief valve, pressure reducing valve, two temperature/pressure gauges, indicator light and on/off switch.

NOTE: Pages 185 to 187 for sizing information.


NOTE: Consult product specification sheet for proper breaker size. Verify amperage load for Booster Heaters 24kW through 57kW in single phase.

Because of excessively high amps and since these units are NOT field convertible to any other voltage or phase, written confirmation is required before processing can begin.

OPTIONS AND ACCESSORIES – PAGE 181

LOW-TEMP DISHWASHERS – SEE LOW-TEMP SIZING DATA ON PAGE 188

WATER QUALITY REQUIREMENTS – PAGE 190





C-27 with accessory
slide brackets

OPTIONS (available at time of purchase only)

SSBB	Stainless Steel Body and Base	No Charge
C-SECURITY	Security Package (Torx® Screws and Control Cover)	\$204

ACCESSORIES (available for purchase at any time)

FLOORMOUNT	Additional Stainless Steel Floor Mounting Leg Assembly	\$374
WATERTREAT	Blended Phosphate Water Treatment System - not for potable water use (Page 184 for illustration)	966
SHOCK	Shock Absorber reduces water hammer	138
BPRV	Back Pressure Relief Valve	215
PRVB	Additional Brass Pressure Reducing Valve with By-Pass	211
SSA-LEGS	Additional Stainless Steel Adjustable Legs (152-178 mm)	240
BOOSTERBRKT	Additional Slide Brackets	84

NOTE: 152 mm plastic adjustable legs 152-178 mm standard, specify slide brackets if required.
Description of accessories is shown on page 184.

WATER TEMPERATURE RECOVERY TABLE

Compact Model	22°C Rise	39°C Rise	Compact Model	22°C Rise	39°C Rise
C-4	151 lph	87 lph	C-18	685 lph	390 lph
C-5	189 lph	110 lph	C-24	912 lph	522 lph
C-6	227 lph	129 lph	C-27	1026 lph	587 lph
C-7	265 lph	151 lph	C-30	1139 lph	651 lph
C-9	341 lph	197 lph	C-36	1367 lph	780 lph
C-12	454 lph	261 lph	C-39	1480 lph	848 lph
C-13	511 lph	292 lph	C-45	1711 lph	977 lph
C-15	572 lph	326 lph	C-54	2052 lph	1174 lph
C-17	655 lph	375 lph	C-57	2169 lph	1234 lph

NOTE: lph is "liters per hour".

Imperial Electric Booster Water Heaters

Imperial Booster Water Heaters combine quality construction and rugged dependability to provide up to 2169 lph of 82°C sanitizing rinse water. Models include stainless steel front panel, silver gray hammertone body, black base, standard 152 mm legs, Castone® lined tank and have a 61-liter capacity.

- All models include a Castone® lined tank with a 10-year limited warranty
- Features temperature/pressure relief valve, two temperature gauges, a high-temperature limit control, pilot indicator light, On/Off switch and a low-water cut-off (LWCO) to prevent element burnout due to low water conditions
- Built-in heat trap and fiberglass insulation minimizes heat loss
- Stainless steel front panel and powdercoated silver-gray hammertone body is standard on all Imperial models

NOTE: Single phase is uncommon in heaters 24kW and larger and are NOT returnable.



S-54

IMPERIAL ELECTRIC BOOSTER WATER HEATERS

							List Prices	
Model*	kW	240V	240V	380 or 415V	480V	Ship Weight	240V	380, 415 or 480V
		Single Ph	Three Ph	Three Ph	Three Ph			
Small								
S-6	6					91 kg	\$5551	\$5551
S-7	7					91 kg	5631	5631
S-9	9					91 kg	5666	5666
S-12	12					91 kg	5986	5986
S-13	13.5					91 kg	5996	5996
S-15	15					91 kg	6041	6041
S-17	17.25	—		—	—	91 kg	6076	6076
S-18	18					91 kg	6116	6116
Large w/Step Loading								
S-24	24					97 kg	\$6991	\$6991
S-27	27					97 kg	7041	7041
S-30	30					97 kg	7141	7141
S-36	36					97 kg	7651	7616
S-39	39	—		—		97 kg	7746	7706
S-40	40.5					102 kg	8001	7956
S-45	45	—				102 kg	8126	8076
S-54	54	—				102 kg	8146	8091
S-57	57					102 kg	8291	8231

* Only 6, 7 & 9kW models can be field converted to single phase (units are shipped 3-phase open delta). Larger branch circuit required than for balanced 3-phase of equal kW. (Balanced 3-phase available in 6 & 9kW models, consult factory.) 208 and 240V only.

All Electric Booster Models Feature:

Voltage: 240, single phase. 240, 380, 415 or 480, three phase.

Dimensions: 600 W x 578 D x 791 H mm. Add 127 mm to depth for temperature/pressure relief valve. Height includes legs.

Models Shipped with: Castone® lined tank, low-water cut-off (LWCO), temperature/pressure relief valve, pressure reducing valve, two temperature/pressure gauges, indicator light and on/off switch.


NOTE: Pages 185 to 187 for sizing information.

NOTE: Consult product specification sheet for proper breaker size. Verify amperage load for Booster Heaters 24kW through 57kW in single phase. Because of excessively high amps and since these units are NOT field convertible to any other voltage or phase, written confirmation is required before processing can begin.

OPTIONS AND ACCESSORIES – PAGE 183

LOW-TEMP DISHWASHERS – SEE LOW-TEMP SIZING DATA ON PAGE 188

WATER QUALITY REQUIREMENTS – PAGE 190





S-57 with optional stainless steel body and base, and accessory adjustable stainless steel legs

OPTIONS (available at time of purchase only)

SSBB	Stainless Steel Body and Base	No Charge
S-SECURITY	Security Package (Torx® Screws and Control Cover)	\$204

ACCESSORIES (available for purchase at any time)

FLOORMOUNT	Additional Stainless Steel Floor Mounting Leg Assembly	\$374
WATERTREAT	Blended Phosphate Water Treatment System - not for potable water use (Page 184 for illustration)	966
SHOCK	Shock Absorber reduces water hammer	138
BPRV	Back Pressure Relief Valve	215
PRVB	Additional Brass Pressure Reducing Valve with By-Pass	211
SSA-LEGS	Additional Stainless Steel Adjustable Legs (152-178 mm)	240

NOTE: 152 mm plastic adjustable legs 152-178 mm standard. Description of accessories is shown on page 184. Only leg mounting available.


WATER TEMPERATURE RECOVERY TABLE

Imperial Model	22°C Rise	39°C Rise	Imperial Model	22°C Rise	39°C Rise
S-6	227 lph	129 lph	S-24	912 lph	522 lph
S-7	265 lph	151 lph	S-27	1026 lph	587 lph
S-9	341 lph	197 lph	S-30	1139 lph	651 lph
S-12	454 lph	261 lph	S-36	1367 lph	780 lph
S-13	511 lph	292 lph	S-39	1480 lph	848 lph
S-15	572 lph	326 lph	S-40	1541 lph	878 lph
S-17	655 lph	375 lph	S-45	1711 lph	977 lph
S-18	685 lph	390 lph	S-54	2052 lph	1174 lph
			S-57	2169 lph	1234 lph


NOTE: lph is "liters per hour".

Booster Installation

SINGLE BOOSTER INSTALLATION

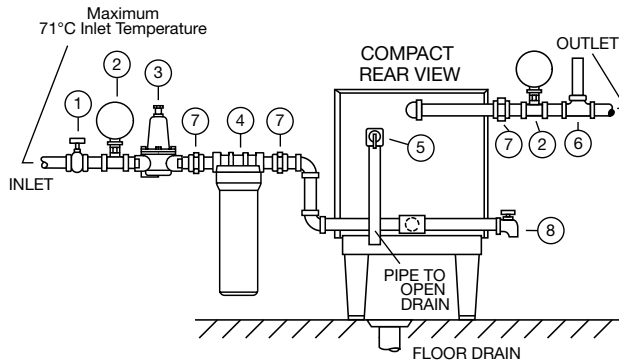

DUAL BOOSTER INSTALLATION

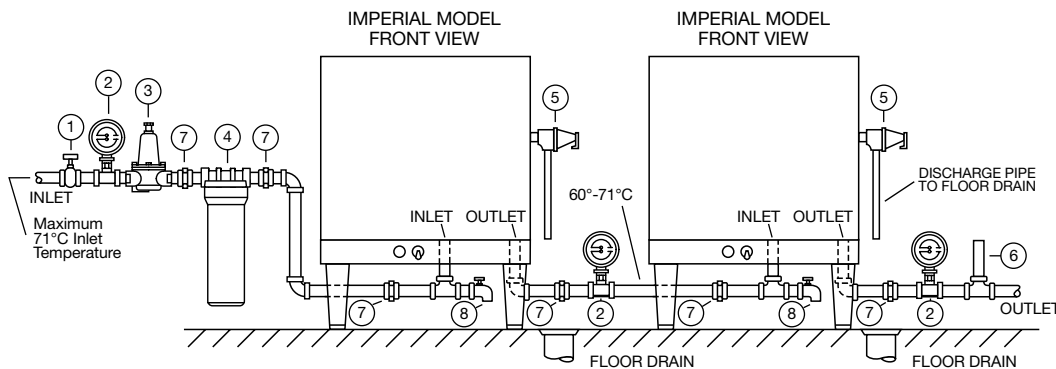

- ① 3/4" Gate or Ball Valve* ② Temperature/Pressure Gauge ③ Pressure Reducing Valve with By-Pass ④ Blended Phosphate Water Treatment System
⑤ Relief Valve (must have discharge pipe to floor drain) ⑥ Shock Absorber ⑦ Union* ⑧ Drain Pipe Valve* *Supplied by installer

CONSULT LOCAL CODES

NOTE: The differential temperature between outlet and inlet temperatures should never be less than 11°C.

NOTE: Thermostat calibration, or adjustment, must be performed at time of installation and is excluded from warranty coverage.
Thermostat adjustments for Low-Temp applications are the responsibility of the installer.

BOOSTER WATER HEATER ACCESSORIES

Back Pressure Relief Valve –

This valve relieves pressure when unit is heating, on models that a check valve is required on the supply line. To be plumbed over an open site drain.



Bronze Pressure Reducing Valve –

This valve provides reduced corrosion and lead-free compliance. This adjusts water flow pressure to 20 psi.



Stainless Steel Adjustable Legs –
Adjustable from 152 to 178 mm. Clean appearance and heavy-duty for long wear.



Floor Mounting Hardware –

Adjustable from 152 to 178 mm. Corrosion-resistant stainless steel legs for deck mounting.




Blended Phosphate Water Treatment System –


Minimizes scale formation and increases unit efficiency. Recommended for Electric Boosters. (Not for potable water use.)



Shock Absorber –
Recommended between the booster and the dishwasher to prevent water hammer.



Slide Bracket –
For mounting the booster heater under a dishtable (available on small and large Compact models only).





Booster Heater Sizing Chart

Dishwasher Model Number	Electric Compact Booster Temperature Rise		Electric Imperial Booster Temperature Rise	
	22°C	39°C	22°C	39°C
ADAMATION				
CSL-1390, CA-2, CA-3, CA-4, SLAP 44	C-39	(2)C-36	S-39	(2)S-36
CA, CA-1	C-54	(2)C-45	S-54	(2)S-45
ALVEY				
FLC-10, SL-2S			S-6	S-9
FLC-12, CL-1, CL-1 Turntable, SA-5A			S-7	S-12
FL-2S			S-9	S-13
KS-70, KS70M SB			S-9	S-15
SL-2D			S-13	S-18
FLC-36			S-15	S-27
KS-88-C			S-18	S-30
KS-70-N, KS-88-N			S-39	(2)S-40
AMERICAN DISH SERVICE				
HT-25	C-7	C-12	S-7	S-12
ACD-44, ADC-66	C-12	C-24	S-12	S-24
BLAKESLEE				
UC-21A, UC-21B	C-4	C-4	S-6	S-6
UC-21	C-6	C-12	S-6	S-12
D-8	C-9	C-13	S-9	S-13
D-9	C-12	C-17	S-12	S-17
Series "R" & "F" -CC, -EE, -LL, -MM, -LLL, -MMM, -PCC, -PEE, -PLL, -PMM (multi-tank) with suffix "LC"	C-13	C-24	S-13	S-24
Series XF-EE, XF-LL	C-17	C-30	S-17	S-30
Series XF-LL, XF-PLL, XF-MM, XF-PMM, XF-EEE, XF-LLL, XF-MMM (Multi-tank) with suffix "LC"	C-17	C-30	S-17	S-30
DD-8	C-18	C-30	S-18	S-30
Series F-E, FA-EE, FA-PEE, FA-LL, FA-PLL, FA-MM, FA-PMM, F-EEE, FA-EEE, FA-LLL, FA-MMM, F-PE	C-30	C-54	S-30	S-54
Series R-L, R-PL, R-M, R-PM, F-L, F-PL, F-M, F-PM (single tank)	C-36	C-54	S-36	S-54
Series XF-L, XF-PL, XF-M, XF-PM (single tank)	(2)C-36		(2)S-36	
Series R-E, R-PE, XF-PEE, XF-PLL, XF-PMM, XF-EEE, XF-LLL, XF-MMM (multi-tank) FA (Flight-A-Round) and RA (Rack-A-Round) use comparable "F" listing.	C-45	(2)C-30	S-45	(2)S-30
XF-EE, XF-EE-LT (with LT suffix)	C-17	C-36	S-17	S-36
CHAMPION				
U-H1, UH-200, UH-200B, U-HB	C-4	C-6	S-6	S-6
UL-150	C-4	C-7	S-6	S-7
UH-150, UH-150B, UH-100, UH-100B, DHB-VS	C-5	C-9	S-6	S-9
D-H1, D-HB	C-6	C-12	S-6	S-12
D-H1T, D-HBT	C-7	C-12	S-7	S-12
44 DRWS, 66 DRPWWS, 80 DRHDPWWS, 70 DRFFPWWS	C-9	C-13	S-9	S-13
PP-28	C-9	C-15	S-9	S-15
D-H1C, D-H1TC	C-9	C-18	S-9	S-18
DHB-VS	C-6	C-12	S-6	S-12
DL-1000, DH-1000	C-6	C-12	S-6	S-12
44 DR, 66 DRPW, 80 DRHDPW, 70 DRFFPW	C-12	C-24	S-12	S-24
66 WSPW, 44-WS, 66-WS, 64, 90FFPW, 100HDPW, 86 PW, 84, 106 PW, 120 HDPW, 110 FFPW	C-13	C-24	S-13	S-24
UC-CW6-WS	C-24	C-36	S-24	S-36
US-CW8-WS	C-24	C-39	S-24	S-39
44, 66 PW, 70FFPW, 80HDPW, 54, 76PW, 80FFPW, 90HDPW	C-24	C-45	S-24	S-45
40-KB, 40-KB-2-2, 40-KFWB, 40-KPRB, 40-KPRB-2-2, 40KPRB-2-3, 60-KB, 60-KB-2-2, 60-KFWB, 60-KFWB-2-2, 60-KPRB, 60-KPRB-2-3 64KB, 64-KB Corner, 64-KPRB, 64-KPRB Corner, 64 Modular, 86 Modular	C-30	C-54	S-30	S-54
44-KB, 44-KB Corner, 44-KPRB, 44-KPRB Corner, 54-KB, 54-KB Corner, 54-KPRB, 54-KPRB Corner, 44 Modular, 66 PW Modular, UC** Series 6' Center, UC-C4	C-36	C-57	S-36	S-57
UC-CW4	C-36	(2)C-36	S-36	(2)S-36
UC-C	C-45	(2)C-36	S-45	(2)S-36
UC**CW Series 6' Center	C-45	(2)C-39	S-45	(2)S-39
W-6-WS	C-45	(2)C-45	S-45	(2)S-40



Booster Heater Sizing Chart

Dishwasher Model Number	Electric Compact Booster Temperature Rise		Electric Imperial Booster Temperature Rise	
	22°C	39°C	22°C	39°C
CMA DISHMACHINES				
AH, C, B*	C-9			
CMA-180	C-5	C-9	S-5	S-9
CMA-180T	C-9	C-13	S-9	S-13
CMA-44/66	C-24	C-36	S-24	S-36
CMA-44H with tank heater, CMA-66H	C-36	C-45	S-36	S-45
EAH/EC*, GLX/L1X/L1X16/L1C	C-4			
EST*	C-5			
EST-44/66	C-12	C-24	S-12	S-24
HOBART				
AM-15F	C-4	C-6	S-6	S-9
LXIC, LXIGC, LX-18C, LX-30C, LX-40C, AM-15F	C-4	C-7	S-6	S-6
LX-30, SR24, SR24H	C-4	C-7	S-6	S-7
LX-18, AM-14F, AM-15, AM-15T	C-5	C-9	S-6	S-9
WM-5C	C-6	C-9	S-6	S-9
WM-5 (Without sump heater)	C-7	C-12	S-7	S-12
AM-14T, AM-14TC	C-7	C-12	S-7	S-12
AM-14, AM-14C	C-9	C-12	S-9	S-12
AM-12, AM-12C*	C-9	C-12	S-9	S-12
UW-50			S-15	S-24
OR Opti-RinSe C44A, CRS-66A, CCS-66A, CPW-80A, C54A, CRS-76A, CCS-76A, CPW-90A, C64A, CRS-86A, CCS-86A, CPW-100A, C88A, CRS-110A, CCS-110A, CPW-124A	C-15	C-27	S-15	S-27
C-54A, CRS-76A, CPW-90A, CCS-76A	C-39	(2)C-36	S-39	(2)S-36
C-44A, CRS-66A, CCS-66A, CPW-80A, C-64A, CRS-86A, CCS-86A, CPW-100A	C-30	C-54	S-30	S-54
C-88A, CRS-110A, CPW-124A, CCS-110A	C-36	C-54	S-36	S-54
Opti-RinSe C44AW, CRS-66AW, CCS-66AW, CPW-80AW	C-9	C-15	S-9	S-15
OR C-44AW, CRS-66AW, CPW-80AW, CCS-66AW	C-12	C-24	S-12	S-24
C-44, CRS-66, CPW-80	C-36	C-54	S-36	S-54
C-54, CRS-76, CPW-90	C-54	(2)C-39	S-54	(2)S-39
C-64W, CRS-86W, CPW-100W, C-88W, CRS-110W, CPW-124W, CCS-86W	C-24	C-36	S-24	S-36
C-64, CRS-86, CPW-100	C-45	(2)C-36	S-45	(2)S-36
FT800W, FT-900W	C-24	C-39	S-24	S-39
FT-600, FT-700	C-54	(2)C-39	S-54	(2)S-39
FT800	C-39	(2)C-39	S-39	(2)S-39
Opti-RinSe	C-36	C-57	S-36	S-57
FT800S, FT-900S	C-39	(2)C-36	S-39	(2)S-36
UTW-28, UTW-28C			S-18	S-36
FRC and FR (Fast Rack Series) use comparable "C" line listing.				
INSINGER				
GS 302, GS-14	C-4	C-4	S-6	S-6
45SA-5	C-9	C-18	S-9	S-18
Commander 18-5C, 18-5CH, CS-5, CS-5C, CS-5CH, CS-5H	C-6	C-12	S-6	S-12
Commander 18-5, 18-5H, Ensign 40-2	C-6	C-12	S-6	S-12
Commander 18-6, 18-6H	C-6	C-12	S-6	S-12
Commander 18-6, 18-6H (Built-In)	ABB-13.5	ABB-13.5		
Admiral 44, 66	C-15	C-27	S-15	S-27
Admiral 44-4, 66-4	C-24	C-36	S-24	S-39
Admiral 44-4, 66-4 (Built-In)	ABB-15-8	ABB-27-8		
135-20, 185-20, 250-20, 60-20, 85-20, Gallymaster & Modular	C-54		S-54	
Speeder 64, 86-3, Century (all), Super 106-2	C-24	C-45	S-24	S-45
Trac 878	C-24	C-36	S-24	S-36
Clipper (all), R106-2, Super 106-2, Trac 321, Trac 321-2/RPW	C-27	C-45	S-27	S-45
Defender-(1)	C-30	C-54	S-30	S-54
Defender	C-36	C-54	S-36	S-54
Master (all)	C-36	C-57	S-36	S-57
CA-3			S-9	S-24
DA-3			(2)S-9	(2)S-24
For outdated models, consult factory for correct booster.				

* All cycles

* Model AM-12 with serial no. 12-067-357 or below and model AM-12C with serial no. 12-067-537 or below require slightly larger booster than listed.

OR C Models with serial no. 85-1041605 or greater use Opti-RinSe.

■ Shaded area indicates older models prior to Opti-RinSe.



Booster Heater Sizing Chart

Dishwasher Model Number	Electric Compact Booster Temperature Rise		Electric Imperial Booster Temperature Rise	
	22°C	39°C	22°C	39°C
JACKSON				
JP-24, JP-24B, JP-24F, JP-24BF	C-4	C-6	S-6	S-6
24B Series		C-4		S-6
10AB, 10APRB		C-5		S-6
44CE*, 66 CERPW	C-30	C-54	S-30	S-54
54CE, 76 CERPW	C-36	(2)C-30	S-36	(2)S-30
64CE, 86 CERPW	C-27	C-39	S-27	S-39
100	C-12	C-24	S-12	S-24
100B, 100PRB, 150B, 150PRB		C-9		S-9
150	C-12	C-18	S-12	S-18
200	C-7	C-12	S-7	S-12
200B		C-6		S-6
Tempstar, Tempstar SDS, Tempstar HH	C-6	C-12	S-6	S-12
TS-44, TS-66	C-24	C-36	S-24	S-36
AJ-44, AJ-66, AJ-80, WH-44, ES-4400, ES-6600 (ECOLAB/JACKSON)	C-24	C-45	S-24	S-45
AJ-54, AJ-76, AJ-90	C-30	C-54	S-30	S-54
AJ-64, AJ-86, AJ-100	C-24	C-39	S-24	S-39
* Model #44CE w/SN1999 or below requires larger booster than listed.				
KNIGHT EQUIPMENT LTD.				
KLE-112-HL	C-7	C-12	S-7	S-12
MEIKO				
K-44, K-66, K-80	C-24	C-36	S-24	S-36
K-54, K-76, K-90, K-64, K-86, K-100	C-24	C-45	S-24	S-45
METALWASH/INTENDGE				
FW4	C-12	C-18	S-12	S-18
RS-30A, RS-28L			S-15	S-24
RT-74, RT-60, RT-42B, RT-42BC			S-27	S-40
RS-2R			S-30	S-45
STERO				
ER-44, ER-44-10, ER-66S, ER-76S, ER-76SC	C-12	C-24	S-12	S-24
ER-64, ER-86S, ER-94S, ER-94SC	C-15	C-24	S-15	S-24
SCT-44-10-LW, SCT-44-LW, SCT-66S-LW, SCT-76S-LW, SCT-76SC-LW, SCT-90S-LW	C-12	C-24	S-12	S-24
SC-1-2-4-LW, SC-1-6-4-LW, SC-2-4-LW, SC-5-2-4-LW, SC-5-6-4-LW, SC-6-4-LW	C-24	C-45	S-24	S-45
SCT-64, SCT-86S, SCT-94S, SCT-94SC	C-24	C-39	S-24	S-39
SCT-108S, SCT-108SC, SCT-76, SCT-94SM	C-27	C-54	S-27	S-54
SC-6-4, SCT-44, SCT-44-10, SCT-66S, SCT-76S, SCT-76SC, SCT-90S	C-30	C-54	S-30	S-54
SCT-120S, SCT-120SC, SCT-120SM, SCT-150SM	C-36	C-57	S-36	S-57
STW-110, SC-1-2-7-4, SC-1-6-3-4, SC-1-6-7-4, SC-2-7-4, SC-5-2-7-4, SC-5-6-3-4, SC-5-6-7-4, SC-6-3-4, SC-6-7-4	C-39	(2)C-36	S-39	(2)S-36
SC-1-2-4, SC-1-6-4, SC-2-4, SC-5-2-4, SC-5-6-4	C-45	(2)C-36	S-45	(2)S-36
SCT-44-10-SC-1-3-4, SCT-44-10-3-4, SCT-44-SC-1-3-4, SCT-44-SC-3-4, SCT-54-SC-1-3-4, SCT-54-SC-3-4, SCT-76S-SC-3-4	C-45	(2)C-36	S-40	(2)S-36
STPC (Four tank)	C-24	C-39	S-24	S-39
STPCW (Four tank)	C-24	C-45	S-24	S-40
STPC	C-27	C-54	S-27	S-54
STPCW	C-36	(2)C-30	S-36	(2)S-30
SCBT	C-45	(2)C-36	S-40	(2)S-36
SF-1RA, SC20-1	C-7	C-12	S-7	S-12
SF-2RA, SF-2DRA, SD-2RA, SDRA, SDRA-PACK	C-12	C-18	S-12	S-18
SCT-54, SCT-76SM	C-36	C-57	S-36	S-57
SCT-76, SCT-80, SCT-94, SCT-108, SCT-120	C-45	C-57	S-45	S-57
U-31-A, U-31-AC			S-18	S-36
U-31-A2	C-45	(2)C-36	S-45	(2)S-36
STBUW-14	C-57	(2)C-54	S-57	(2)S-54
SC-2-3-4, SC-5-2-3-4	C-30	(2)C-27	S-30	(2)S-27
SC20-2	C-12	C-24	S-12	S-2
SC-2-8, SC-2-9, SC-1-2-8, SC-5-6-8, SC-6-8, SC-6-9, SC-1-6-8, SC-5-6-9, SC-5-2-9, SC-1-6-9, SC-5-2-8	C-18	C-36	S-18	S-36

This selector chart is based on 22°C and 39°C temperature rises, 138kPa flow pressure, and minimum rinse cycle timer setting in NSF listing.

All booster heaters are rated at 100% of the capacity of the dishwashers as recommended by the National Sanitation Foundation. Where make-up water for wash tank is provided from final rinse supply, chart recommendations are based upon this additional demand (not over 8 LPM) as required by NSF.

All sizings shown are that of the dishwasher manufacturers. Hatco Corporation is not responsible for incorrect sizing applications.

SIZING CALCULATION

Rule of thumb for Hatco Electric
Booster Water Heaters:

$$\frac{\text{LPH}}{38} = \text{kW } 22^\circ\text{C rise}$$



Water Heater Data

PLUMBING DATA

Dielectric couplings should be used in connecting dissimilar metals, such as galvanized to copper, to prevent electrolysis.

All Hatco Booster Water Heaters require 19.05 mm piping.

A check valve should not be installed in the supply line to the booster heater.

All shut-off valves must be gate or ball valves – not globe valves.

BOOSTER HEATER SIZING FORMULA

$$\frac{\text{LPH} \times ^\circ\text{C Temp. Rise}}{840} = \text{kW}$$

NOTE: LPH is liters per hour.

ELECTRICAL FORMULAS

$$\text{Watts} = \text{Amps}$$

$$\text{Volts} \quad 1\text{-phase}$$

$$\frac{\text{Watts} \times .86}{\text{Volts}} = \text{Amps}$$

$$\text{3-phase (open delta)}$$

$$\frac{\text{Watts}}{\text{Volts} \times 1.73} = \text{Amps}$$

$$\text{3-phase (balanced delta)}$$

SEE BOOSTER HEATER SIZING CHART, PAGES 185-187.

NOTE: When primary temperatures are less than 29°C consult factory for suitable booster heater.

WATER TEMPERATURE RECOVERY TABLE IN LPH °C RISE

kW	16°	22°	28°	33°	39°	44°	50°	55°
4	204	151	121	102	87	76	68	61
5	254	189	151	125	110	95	83	76
6	303	227	182	151	129	114	102	91
7	356	265	212	178	151	133	117	106
9	454	341	273	227	197	170	151	136
9.9	500	375	299	250	216	189	167	151
10.5	530	398	318	265	227	201	178	159
11.4	581	433	350	289	247	217	194	175
12	610	454	363	303	261	227	204	182
13.5	685	511	409	341	292	257	227	204
15	761	572	454	379	326	284	254	227
17.25	874	655	526	435	375	329	292	261
18	912	685	549	454	390	341	303	273
24	1215	912	731	610	522	454	405	363
27	1367	1026	821	685	587	511	454	409
30	1518	1139	912	761	651	572	507	454
36	1825	1367	1094	912	780	685	610	549
39	1976	1480	1185	988	848	742	659	594
40.5	2052	1541	1230	1026	878	768	685	617
45	2279	1711	1367	1139	977	856	761	685
54	2737	2052	1643	1367	1174	1026	912	821
57	2888	2169	1734	1442	1234	1083	963	867

Sizing Chart For Low-Temp Dishmachines

BOOSTERS RATED AT 16°C RISE

Dishwasher Model Number	Electric Compact Booster	Electric Imperial Booster	Dishwasher Model Number	Electric Compact Booster	Electric Imperial Booster
AMERICAN DISH SERVICE			CHAMPION		
AH, AH-3D, AH-3D-S, AHC, AHC-3D, AHC-3D-S, ET-A, ET-AF, ET-AH, ET-A-M, ET-AH-M, ET-A-3, ET-AH-3, L-90-3D, L-90-3D-K, L-90-3D-K-S, L-90-3D-S, L-90-3DC, L-90-3DC-K, L-90-3DC-K-S, L-90-3DC-S, L-90-3DW, L-90-3DW-K, L-90-3DW-K-S, L-90-3DW-S, L-90-3DWC, L-90-3DWC-K, L-90-3DWC-K-S, L-90-3DWC-S, WH, WHC	C-4	S-6	ULD, ULF	C-6	S-6
A-3D, A-3D-S, A, AC, AC-3D, AC-3D-S, AH-B, ET-AF-3, ET-AF-M, HT-25, L-60-3D, L-60-3D-K, L-60-3D-K-S, L-60-3D-S, L-60-3DC, L-60-3DC-K, L-60-3DC-K-S, L-60-3DC-S, L-60-3DW, L-60-3DW-K, L-60-3DW-K-S, L-60-3DW-S, L-60-3DWC, L-60-3DWC-K, L-60-3DWC-K-S, L-60-3DWC-S, L-72-3D, L-72-3D-K, L-72-3D-K-S, L-72-3D-S, L-72-3DC, L-72-3DC-K, L-72-3DC-K-S, L-72-3DC-S, L-72-3DW, L-72-3DW-K, L-72-3DW-K-S, L-72-3DW-S, L-72-3DWC, L-72-3DWC-K, L-72-3DWC-K-S, L-72-3DWC-S, W, WC	C-5	S-6	DLF	C-13	S-13
A-B, AD-25, SS-25, 5-AH, 5-AHS	C-6	S-6	KL44, KL66	C-36	S-36
AF, AF-3D, AF-3D-S, AF-B, AFC, AFC-3D, AFC-3D-S, AFW, AFWC, 5, 5-S	C-7	S-7	CMA DISH MACHINES		
ADC-44, ADC-66, 5-AG, 5-AGS, 5-CD-LF, 5-CD-RF	C-9	S-9	A-1, AH-1, C-1, VAC-1, A-3, AH-3, C-3, L-1C, VAC-3, VAC-4, VAC-5, L-1X	C-4	S-6
BLAKESLEE			A-2, AH-1, AH-2, AH-3, B-3, C-1, C-2, C-3, EVA-1, EVA-2, EVA-3, EVA-4, EVA-5, VAC-2	C-6	S-6
U21-C	C-4	S-6	B-1	C-7	S-7
D-8-LT	C-6	S-6	B-2	C-9	S-9
DD-8-LT, R-CC64-LT, R-EE-LT	C-12	S-12	CMA-44L with tank heater, CMA-66L	C-24	S-24
Series XF-EE-LT, XF-PEE-LT, XF-LL-LT, XF-PLL-LT, XF-MM-LT, XF-PMM-LT, XF-EEE-LT, XF-LLL-LT, XF-MMM-LT	C-13	S-13	CVA-1, CVA-2, CVA-3, CVA-4	C-6	S-6
Series R-L-LT, R-PL-LT, R-M-LT, R-PM-LT, F-L-LT, F-PL-LT, F-M-LT, F-PM-LT (single tank)	C-36	S-36	CVA-5	C-7	S-7
Series "R" & "F" -CC-LT, -EE-LT, -LL-LT, -MM-LT, -LLL-LT, -MMM-LT, -PCC-LT, -PEE-LT, -PLL-LT, -PMM-LT (multi-tank)	C-24	S-24	HOBERT		
Series XF-L-LT, XF-PL-LT, XF-M-LT, XF-PM-LT (single tank)	C-54	S-54	LX-18C, LX-30C, LX-40C, WM-5C, SR24C	C-4	S-6
Series XF-PEE-LT, XF-PLL-LT, XF-PMM-LT, XF-EEE-LT, XF-LLL-LT, XF-MMM-LT (multi-tank)	C-36	S-36	LT-1	C-6	S-6
FA (Flight-A-Round) and RA (Rack-A-Round) use comparable "F" listing.			AM-14, AM-14C	C-7	S-7
			C44A, CRS66A, CPW80A	C-27	S-27
			FT-800	C-30	S-30
			JACKSON		
			Conservor 24LT, 200LT, ES1000 (Ecolab/Jackson)	C-4	S-6
			Conservor 1, Conservor XL, ES2000 (Ecolab/Jackson)	C-9	S-9
			Conservor 2, Conservor XL2, ES4000 (Ecolab/Jackson)	C-15	S-15
			AJ-44, AJ-66, AJ-80	C-18	S-18
			KNIGHT EQUIPMENT LTD.		
			KLE-112-HL	C-5	S-6
			KLE-117i, KLE-117c, KLE-175GT, KLE-175GTM, KLE-235d	C-9	S-9
			KLE-175GT Corner, KLE-175GTM Corner	C-13	S-13
				C-12	S-12

Low-Temp Sizing Data

Chemical low-temp dishwashers are most effective when supplied with a 60°C hot water supply. Sometimes this water temperature is not available due to undersized primary water heaters or local safety codes. Hatco can supply a pre-heater for chemical low-temp dishwashers to provide an adequate supply of 60°C hot water for proper operation.

NOTE: When ordering a heater for use with a chemical low-temp dishwasher, thermostat adjustments for low-temp applications are the responsibility of the installer.


To properly size a Hatco heater for low-temp use:

1. Determine the required temperature rise by subtracting the available hot water supply temperature from 60°C. This should be a minimum of 11°C.
2. Determine the water usage by consulting the dishwasher data plate, literature or NSF listing. This should be shown as liters per hour (LPH).
3. Use the Hatco formula for sizing or the sizing chart on this page to determine the required kW and select the appropriate Hatco model.

Food Pans And Trivets




PIZZA PANS
14"PIZZA PAN
16"PIZZA PAN
18"PIZZA PAN



ST PANS
ST PAN 1/3
ST PAN 1/2
ST PAN 2
ST PAN 4

FOOD PANS

Model	Description	Dimensions	List Price
ALUM PAN	Half-Size Sheet Pan	457 W x 330 D mm	\$ 35
18"SHEET PAN	Full Size Sheet Pan	457 W x 660 D mm	49
14"PIZZA PAN	Perforated Pizza Pan	356 mm Diameter	38
16"PIZZA PAN	Perforated Pizza Pan	406 mm Diameter	43
18"PIZZA PAN	Perforated Pizza Pan	457 mm Diameter	45
ST PAN 1/3	Third-Size Stainless Steel Pan	324 W x 175 D x 64 H mm	64
ST PAN 1/2	Half-Size Stainless Steel Pan	324 W x 264 D x 64 H mm	74
ST PAN 2	Full-Size Stainless Steel Pan	324 W x 527 D x 64 H mm	88
ST PAN 4	Full-Size Stainless Steel Pan	324 W x 527 D x 102 H mm	110




HDW TRIVET



HDW-SPLASH



HDW 6" PAN




Additional Humidity

- A. Stainless Steel Food Pan
- B. Splash Baffle
HDW-SPLASH Accessory
- C. Water/Spillage Pan (add 6 mm of water)
HDW-SPILL Accessory

FOOD PANS AND TRIVETS

Model	Description	Dimensions	List Price
HDW-TRIVET	Custom Trivet raises food product	13 mm off bottom of pan	\$ 67
HDW-SPLASH	Splash Baffle (One per drawer)		61
HDW-SPILL	Water/Spillage Pan (one per drawer)		291
HDW 6" PAN	Full-Size Stainless Steel Food Pan	324 W x 527 D x 152 H mm	120



TRIVETS
TRIVET (1/2)SS
TRIVET SS

FOOD PANS AND TRIVETS

Model	Description	Dimensions	List Price
Wire Trivets Stainless –			
TRIVET (1/2)SS	Half-Size	259 W x 194 D mm	\$119
TRIVET SS	Full Size	257 W x 457 D mm	165



GENERAL INFORMATION

Price Policy: Prices are in United States dollars and are subject to change without notice. Prices and discounts apply to accessories at time of initial equipment order only, not when ordered at a later date.

Standard Payment Terms: Cash in advance of shipment or as negotiated.

Hatco Banking Coordinates:

JP Morgan Chase Bank

131 S. Dearborn, 6th Floor

Chicago, IL 60603 U.S.A.

S.W.I.F.T. No: CHASUS33, TELEX: 6733943

Favour: Hatco Account Number: 632687315

Standard Shipment Terms: EX Works Sturgeon Bay, WI, 54235 U.S.A.

Freight Classification: See Hatco website for more details:

www.hatcocorp.com

under RESOURCES tab in the upper right-hand corner,

click on EQUIPMENT SHIPPING INFO

ALL HATCO PRODUCTS SHIPPED WITH INSTALLATION AND OPERATING INSTRUCTIONS. CONSULT LOCAL CODES BEFORE INSTALLING EQUIPMENT.

E-mail inquiries and requests to: support@hatcocorp.com

E-mail orders to: intlsales@hatcocorp.com

Telephone: (414) 671-6350

www.hatcocorp.com

Hatco products are manufactured for commercial use only. See product specification sheet for the appropriate approvals.

Water Quality Requirements

Water supply in excess of .75 grains of hardness per liter (GPL) must be treated and softened before being used. Water containing over .75 GPL will decrease the efficiency and reduce the operating life of the unit.

NOTE: Product failure caused by liming or sediment buildup is not covered under warranty.

NOTE: See pages 184 for Blended Phosphate Water Treatment System.

Limited Warranty

For the full information pertaining to the Hatco warranty protection for your equipment, go to our website at:

www.hatcocorp.com

Step 1: make sure you are on your region

Step 2: in the **SUPPORT** drop-down at the top of the page, select **WARRANTY**



Ordering Procedures

CUSTOMER NOTE –

To ensure prompt and accurate processing of your order, please provide the following information:

ALL PRODUCTS –

1. Model number, voltage, 50 and 60 Hertz and phase, specify if CE Mark is required.
2. Specify options and accessories as required. Options are not retrofittable.
3. Consult factory when ordering equipment for special applications.
4. E-mail orders are acceptable and do not require confirmation.

**ALL WATT RATINGS ARE NOMINAL. ACTUAL WATTAGE MAY VARY.
CONSULT FACTORY FOR MORE INFORMATION.**

Returns

No product will be accepted on a return shipment without a Material Return Authorization from Hatco Export Sales Department. Products returned at customer's convenience are subject to inspection and a restocking charge of 25% of EX Works, freight and related expenses for shipper's account; contact Hatco Export Department. Decorative Heat Lamps (DL Series) are custom builds and non-returnable.

DAMAGED FREIGHT POLICY

All freight should be inspected during the receiving process for possible damage. Should there be a question about the condition of the equipment, it is better to refuse the shipment. If damage is found after delivery, it is the consignee's (receiver's) responsibility to notify the carrier within **5 days** of delivery.

All Hatco Shipments specify an Incoterm 2010 in which the shipment was made. Incoterms determine who bears the risk of cargo damage or loss at any given point of shipment and therefore who pays in the event of loss or damage. If it is found that any part of the shipment has sustained damage during transportation, Hatco Corporation must be contacted as well as immediately notifying the last carrier.

For assistance, contact Hatco via e-mail at: support@hatcocorp.com and provide information listed below

1. Hatco Shipment Number
2. Delivery date and date damage was discovered
3. Contact name, phone number and email address
4. Type of unit damaged including model and serial number
5. Extent of damage
6. Pictures of damage as well as packaging




PRODUCT INDEX

WELLS	2-35	DRAWER WARMERS	120-125
DECORATIVE LAMPS & DISPLAY LIGHTS	36-45	MERCHANDISERS	126-140
STRIP HEATERS	46-74	HOLDING & DISPLAY CABINETS	141-158
FRY STATIONS	75-80	TOASTERS	159-165
CARVING STATIONS	81-83	INDUCTION EQUIPMENT	166-172
PORTABLES	84-96	LIGHT COOKING EQUIPMENT	173-176
BUILT-INS	97-119	WATER HEATERS	177-188


3CS	178	GR5AL, GR5AHL	50-51	HL	43
C	180-181	GRA, GRAH	52, 54	HL5	44
CDW	125	GRA-xxD, GRAH-xxD	55, 57	HSBF-GL, -HC, -SS	98-100
CLED	45	GRAL, GRAHL	53-54	HW	3
CSBF, CSBFR, CSBFX	104-105	GRAL-xxD, GRAHL-xxD	56-57	HWB	26-28, 34-35
CSSB, CSSBR CSSBX	101	GRAIH, GRAIHL	60, 62	HWB-xQT, HWBI-xQT	29-30, 34-35
CSSBF, CSSBFR, CSSBFX	102-103	GRAIH-xxD, GRAIHL-xxD	61-62	HWBI, HWBI43	18-20, 23, 34-35
CSU, CSUR, CSUX	106-107	GR-B	76	HWBI-S	21-23, 34-35
CWB, CWB-S	7-9, 13	GRBW	95-96	HWBRN	31-32, 34-35
CWBR, CWBR-S, CWBX, CWBX-S	10-13	GRCD, GRCDH	137-138	HWBRT	31-32, 34-35
DCS	82	GRCMW	136	HWBRN-xQT	33-35
DL, DLL, DLH	37-42	GRCSC, GRCSCDH	83	HWBRT-xQT	33-35
FDWD-1-MN	152	GRFF, GRFFL, GRFFB, GRFFBL	76-77	HXMH, HXMH-xxD	133-134
FDWD	143, 146-147	GRFHS	78-79	HXMS, HXMS-xxD	133-134
FR	179	GRFS	78-79	IHDCH	148-149
FS2HAC	158	GRHD, GRHDH	139-140	IRNG-PC1, -PB1	167-168
FSD, FSDT	144-147	GRHW	94	IRNG-PC2, -PB2	169-170
FSHAC	158	GRN, GRNH	58-59	IWRM-CD1, -B1	171-172
FSHC-5W, -7W	154	GRPWS	127	ITQ	160
FSHC-6W	156	GRS	87-89	IWB, IWB-S	4-6
FSHC-7	157	GRS2G	142	LW	85
FSHC-12W, -17W	155	GRSB	116-117	MDW	151
FST-1-MN	152	GRSBF	118-119	MPWS	80
FTB, FTB-S	14-15	GRSDH, GRSDH-xxD	129-130	PFST	153
FTBR, FTBX	16-17	GRSDS, GRSDS-xxD	129-130	RMB	74
FWM	175	GRSDS/H	128	S	182-183
GR, GRH	53-54	GRSR	86	SAL	176
GR2A, GR2AH	63, 65	GRSS	92	SNACK	174
GR2A-xxD, GR2AH-xxD	66, 68	GRSSB	113	TK	164-165
GR2AL, GR2AHL	64-65	GRSSR	90-91	TQ	162-163, 165
GR2AL-xxD, GR2AHL-xxD	67-68	HBG	93	TQ3	161
GR2BW	95-96	HBGB, HBGBH	114-115	UGA, UGAH	69, 71
GR2S	89	HCSBF, HCSBFR, HCSBFX	111-112	UGA-xxD, UGAH-xxD	70-71
GR2SDH, GR2SDH-xxD	131-132	HCSSB, HCSSBR, HCSSBX	108	UGAL, UGAHL	69, 71
GR2SDS, GR2SDS-xxD	131-132	HCSBFB, HCSBFR, HCSBFX	109-110	UGAL-xxD, UGAHL-xxD	70-71
GR3SDS-xxDCT, GR3SDS-xxTCT	135	HDW	122-124	UGFF, UGFFL, UGFFB, UGFFBL	76-77
GR5A, GR5AH	49	HDWTC	121	WFST	150

Paint Chip and Stone Sample Colors

DESIGNER COLORS

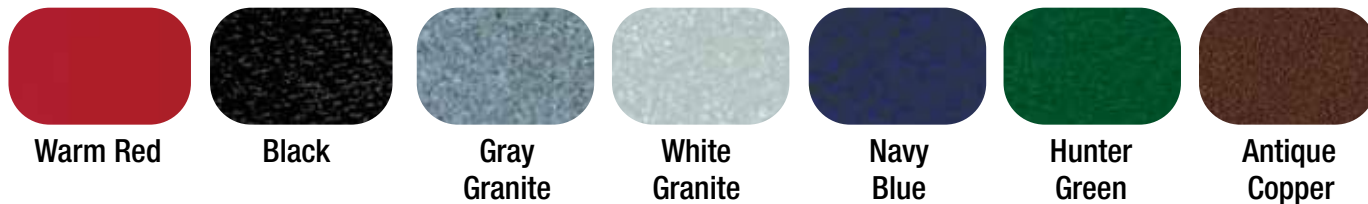


GLOSS FINISHES

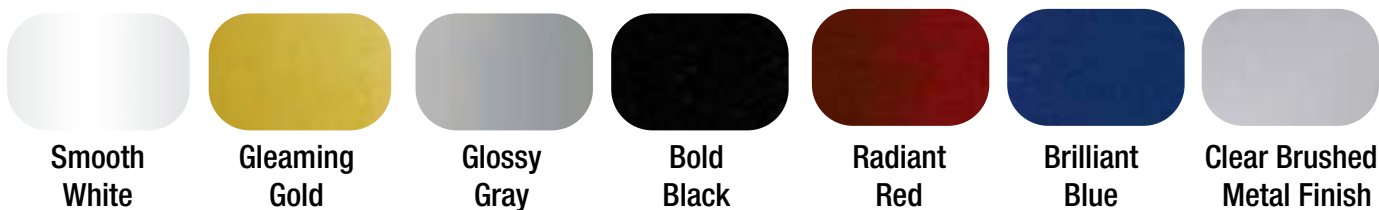

PLATED FINISHES



SIMULATED STONE COLORS*

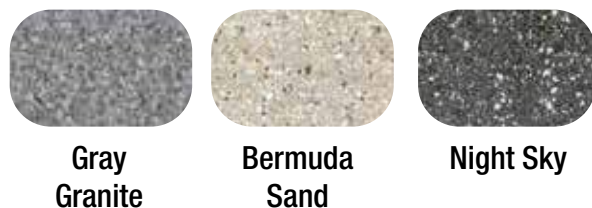

*Colors are a representation and may not exactly match our colors.
Consult factory for possible color matching options on these colors.
Non-standard colors are non-returnable.*

To order a Hatco Paint Chip & Stone Sample Colors Sheet, visit www.hatcocorp.com / Order Literature / Sales Literature

* Simulated Stone is Swanstone®



People who serve, products that solve.®

Hatco Corporation

P.O. Box 340500 • Milwaukee, WI 53234-0500

414-671-6350

support@hatcocorp.com • www.hatcocorp.com

Export US\$ Price List • July 1, 2022