

PRICING EFFECTIVE January 1, 2024

H. D. SHELDON HOT ADDENDUM FOODSERVICE EQUIPMENT - EXPORT PRICE LIST

H. D. SHELDON & COMPANY: 143 WEST 29TH STREET, NEW YORK, NY 10001, USA
TEL: (212) 924-6920 FAX: (212) 627-1759 E-MAIL: sales@hdsheldon.com

RAINBOW LOGISTICS: 4010-4015E, 41F, ATL Logistics Centre A, Berth 3,
Kwai Chung Container Terminal, Kwai Chung, NT, Hong Kong

Countertop Heated Well

Providing versatility and reliability, Hatco Countertop Heated Wells hold food hot and fresh in either a wet or dry operation with an adjustable temperature control. The HW-FUL unit can hold a full-size pan or two half-size pans.

- Controls feature a separate lighted On/Off rocker switch and adjustable temperature dial
- May be used dry but best performance when used with water. Dry indicator lamp informs user to add water
- Thicker .8 mm stainless steel pan with a stainless steel housing (aluminized steel bottom)
- Pan edge offset helps keep condensation from dripping onto countertop surface

HW-FUL with accessory food pans and pan support bar



Shipped from  H.K. or  U.S.A.

HOLD ONLY COUNTERTOP – FULL-SIZE

Model	Dimensions W x D x H	Voltage Single Phase 50/60 Hz	Watts	Amps	Ship Weight	List Price
HW-FUL	368 x 607 x 248 mm	230	1200	5.2	13 kg	\$637

All Hold Only Countertop Heated Well Models Feature:

Voltage: Single phase, 50/60 Hz.

Cord Location: Bottom left corner on back of unit.

Models Shipped with: Stainless steel (aluminized stainless steel bottom) housing with a metal sheathed heating element, a power On/Off switch, a temperature control, a dry unit indicator light and a 1829 mm cord with plug attached.

ACCESSORIES (available for purchase at any time)

HW-2-7QT	Adapter to convert warmer to hold two 7-Liter Inserts	\$98
HW-3-4QT	Adapter to convert warmer to hold three 4-Liter Inserts	98
HW12BAR	305 mm Pan Support for Countertop Wells	21
HW20BAR	508 mm Pan Support for Countertop Wells	25



HW-2-7Q
Adapter to hold
two 7-Liter Pans



HW-3-4Q
Adapter to hold
three 4-Liter Pans

HW20BAR

508 mm Pan Support



HW12BAR

305 mm Pan Support

H W - x x x

Heated Well _____ FUL = Full-Size Pan

HEATMAX Round Heated Wells

The multipurpose dry Heated Well from Hatco offers the flexibility of food warmers, soup kettles, Bain-Marie heaters, steamers and pasta cookers all in one! With a range of temperature settings, HEATMAX can boil pasta and soup noodles, steam dim sum and warm and hold soups, curry, gravies and toppings at safe-serving temperatures.

- Three temperature setpoints from 50°C to 100°C for warming, steaming and boiling
- Low power mode allows energy efficiency
- Single built-in model available (one 10-liter round pan)
- Freestanding units available as a single (one 10-liter round pan) or dual model (two 10-liter round pans) with individually-controlled pans



RHW-1B includes one well with 10-liter pot and hinged lid (ladle not included)



RHW-1 includes one well with 10-liter pot and hinged lid



RHW-2 includes two wells with two 10-liter pots and hinged lids (not shown)

Shipped from H.K.

FREESTANDING ROUND HEATED WELLS

Model	Dimensions W x D x H	Voltage		Watts	Amps	Ship Weight	List Price
		Single Phase	50/60 Hz				
RHW-1	359 x 330 x 355 mm	230	1250	5.4	9 kg	\$ 692	
RHW-2	630 x 330 x 355 mm	230	2500	10.9	16 kg	1121	

All Freestanding Round Heated Well Models Feature:

Liquid Capacity: RHW-1: 10 liter pot. Actual pot capacity: 6 liters for boiling application or 8 liters for warming application.

RHW-2: 2 x 10 liter pots. Actual pot capacity: 2 x 6 liters for boiling application or 2 x 8 liters for warming application.

RHW-1 Shipped with: One food holding pan and one pan lid.

RHW-2 Shipped with: Two food holding pans and two pan lids.

Cord Location: 1829 mm cord and plug, back of unit.

Shipped from H.K.

BUILT-IN ROUND HEATED WELL

		Voltage				
Model	Dimensions W x D x H	Single Phase	Watts	Amps	Ship Weight	List Price
		50/60 Hz				
RHW-1B	360 x 330 x 341 mm	230	1250	5.4	10 kg	\$673

All Built-In Round Heated Well Models Feature:

Liquid Capacity: 10 liters. Actual pot capacity: 6 liters for boiling application or 8 liters for warming application.

RHW-1B Shipped with: One food holding pan, one pan lid and remote control.

Cord Location: 1422 mm cable from well to control box with a 1829 mm cord and plug located at the back of the control box.

Recommended Well Cut-Out Size: 305 mm diameter.

ACCESSORIES (pricing applies only at time of equipment purchase)

RHW-11QT-POT	RHW 10.4 Liter Round Pan	\$142
RHW-11QT-LID-HG	RHW Hinged Lid for 10.4 Liter Round Pan	107
RHW-SP	RHW Steamer Plate	90




RHW-11QT-LID-HG
Hinged lid for 10.4
Liter Round Pan



RHW-SP
Steamer Plate



RHW-11QT-POT
10.4 Liter
Round Pan

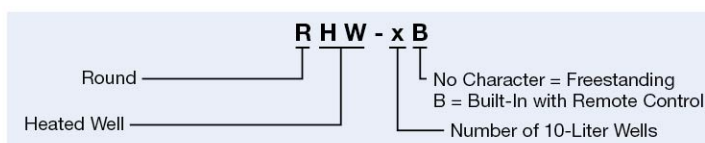

HEATMAX Rectangular Heated Wells



Hatco second generation HEATMAX Heated Wells are multipurpose units specially designed to rethermalize or cook pasta and vegetables. It also can be used to hold a wide variety of foods including soups, curry, gravies, and a variety of toppings. The heating element temperatures are monitored by an improved electronic controller for optimum results.

- Heat is evenly distributed throughout the unit to cook or hold foods at desired temperatures, and the insulated stainless steel design provides easy maintenance and durable performance.
- All units are equipped with an improved electronic control panel and an energy saving low power mode that saves electricity during off-peak hours.
- RCTHW2 Series units are equipped with two high-powered heating elements for efficient, even heating.
- Autofill and Pasta plate come standard on 6kw models.
- Temperature setting range: 40-95 °C.



RCTHW2-3



RCTHW2-3B



RCTHW2-6
w/ standard RCTHW-PC and
non-standard RCTHW-BASKET
accessories shown.



RCTHW2-6B

FREESTANDING RECTANGULAR HEATED WELL

Model	Dimensions W x D x H	Watts	Ship Weight	List Price
RCTHW2-3	368 x 582 x 290mm	3000	12 kg	\$971

All Freestanding Rectangular Heated Well Models Feature:

Voltage: 220~240V, single phase, 50/60 Hz, 11.5~12.5 amps.

Cord Location: 1830 mm cord & plug, back of unit.

FREESTANDING PASTA COOKER

Model	Dimensions W x D x H	Watts	Ship Weight	List Price
RCTHW2-6	368 x 582 x 290mm	6000	14 kg	\$1343

All Freestanding Pasta Cookers Feature:

Voltage: 220~240V, single phase, 50/60 Hz, 23~25 amps.

230/400V, three phase.

RCTHW2-6 Shipped with: Auto-fill, overflow drain and a pasta cooker plate.

Cord Location: 1830 mm cord, back of unit.

BUILT-IN RECTANGULAR HEATED WELL

Model	Dimensions W x D x H	Watts	Ship Weight	List Price
RCTHW2-3B	368 x 582 x 302 mm	3000	13 kg	\$1025

All Built-In Rectangular Heated Well Models Feature:

Voltage: 220~240V, single phase, 50/60 Hz, 11.5~12.5 amps.

RCTHW2-3B Shipped with: Remote control box and a 2000 mm well to control box cable.

Cord Location: 1830 mm cord & plug, bottom back of well.

Recommended Well Cut-Out Size: 550 mm W x 344 mm D.

BUILT-IN PASTA COOKER

Model	Dimensions W x D x H	Watts	Ship Weight	List Price
RCTHW2-6B	368 x 582 x 302 mm	6000	15 kg	\$1380

All Built-In Pasta Cookers Feature:

Voltage: 220~240V, single phase, 50/60 Hz, 23~25 amps.

230/400V, three phase.

RCTHW2-6B Shipped with: Auto-fill, overflow drain, remote control box, a pasta cooker plate and a 2000 mm well to control box cable.

Cord Location: 1830 mm cord, bottom back of well.

Recommended Well Cut-Out Size: 570 mm W x 344 mm D.

ACCESSORIES (pricing applies only at time of equipment purchase)

RCTHW2-SK	RCTHW Soup Kettle Plate (7-Liter Pot not included)	\$140
RCTHW-SW	RCTHW Bain-Marie/Sauce Warmer Plate (4-Liter Pot not included)	145
RCTHW-SP	RCTHW Steamer Plate (6 holes)	115
RCTHW-PC	RCTHW Pasta Cooker Plate	203
RCTHW-BASKET	RCTHW Noodle Basket with Stainless Steel Handle	30
4QT-PAN	4-Liter Round Pan	124
4QT-LID-1	4-Liter Round, Notched, Solid Lid	59
7QT-PAN	7-Liter Round Pan	138
7QT-LID-1	7-Liter Round, Notched, Solid Lid	72
RCTHW-1/3 SP	Steamer Plate GN1/3 (1/3 Food Pan & Noodle Baskets not Included)	132
RCTHW-2/3 SP	Steamer Plate GN2/3 (2/3 Food Pan & Noodle Baskets not Included)	125



7QT-LID-1
7-liter notched lid



7QT-PAN
7-liter round pan



4QT-LID-1
4-liter notched lid



4QT-PAN
4-liter round pan



RCTHW2-SK
Soup kettle plate



RCTHW-SW
Bain-Marie/sauce
warmer plate



RCTHW-SP
Steamer plate
(6 holes)



RCTHW-PC
Pasta cooker plate



RCTHW-Basket
Noodle basket with
stainless steel handle



RCTHW-1/3 SP
Fits 1/3 size food pans



RCTHW-2/3 SP
Fits 2/3 size food pans

RCTHW2 - x B

Rectangular
Heated Well

Built-In w/Remote-Mounted Control Box
Kilowatt(kw) Rating of Unit



Mini Countertop Heated Well

High Efficiency, Small Footprint

Hatco Mini Countertop Heated Wells are ideal for holding sauces with mechanical thermostatic control.

The HW-13 unit can hold a 1/3 pan or two 1/6 pans.

- Controls feature a lighted On / Off rocker switch, adjustable temperature dial and dry indicator lamp.
- Dry indicator lamp protects the unit from running dry for long period of time.
- Stainless steel housing.
- Non-exposed heating elements provide ease of cleaning of the well.
- "Anti-Drip" design of well edge prevents water, sauce and condensation from flowing to the outside of the unit.



HW-13

Mini Countertop Heated Well

Model	Dimensions	Watts	Amps	Plug	List Price
	W x D x H				
HW-13	224 x 399 x 260mm	315W	1.5A	BS	\$449
		345W	1.5A	BS, SCHUKO, AU, CCC	

All Freestanding Rectangular Heated Well Models Feature:

Voltage: 220~240V, single phase, 50/60 Hz, 1.5 amps.

Cord Location: 1830 mm cord & plug, back of unit.

Countertop Heated Well **HW - x x x**


FUL = Full Size Pan
1/3 = 1/3 Size Pan

GLOMAX® Curved Infrared Strip Heaters

This stylish design, based on Hatco's signature Glo-Ray® Strip Heaters, is the perfect solution for your front-of-the-house applications. Superb for buffet and serving lines, the sleek curved design minimizes its size while accenting and warming the products below.

The entire holding surface is heated evenly with no "cold" spots thanks to Hatco's dependable infrared element technology.

- Narrow, curved design uses a very small footprint: 51 H x 150 D mm
- Widths available from 610-1982 mm
- Angle brackets (mounting) standard
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food
- End panels and mounting brackets match unit color
- Includes Remote Control Box

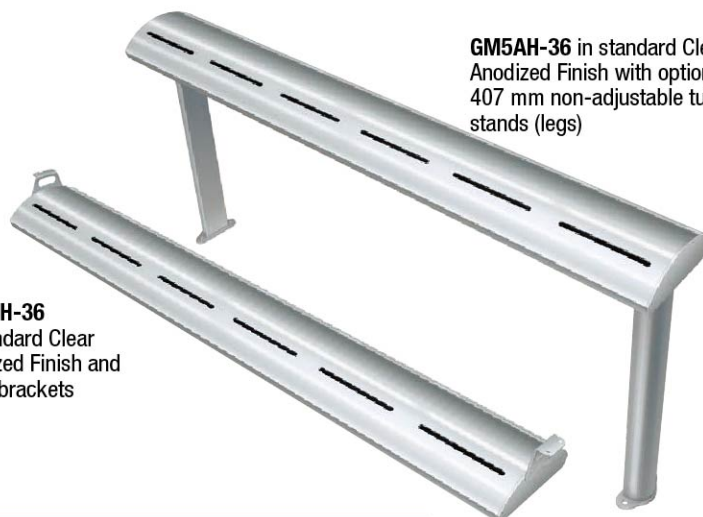

GM5AH-36 in standard Clear Anodized Finish with optional 407 mm non-adjustable tubular stands (legs)

GM5AH-36 in standard Clear Anodized Finish and angle brackets

GLOMAX® CURVED INFRARED STRIP HEATERS


Model	Dimensions W x D x H	Watts 220-230V	Amps 220-230V	Watts 230-240V	Amps 230-240V	Approx. Weight	List Price
High Watt							
GM5AH-24	610 x 150 x 51 mm	500-546	2.3-2.4	495-500	1.9-2.1	5 kg	\$485
GM5AH-30	762 x 150 x 51 mm	660-721	3.0-3.1	606-660	2.6-2.8	5 kg	511
GM5AH-36	915 x 150 x 51 mm	800-874	3.6-3.8	735-800	3.2-3.3	6 kg	537
GM5AH-42	1067 x 150 x 51 mm	950-1038	4.3-4.5	872-950	3.8-4.0	7 kg	571
GM5AH-48	1220 x 150 x 51 mm	1100-1202	5.0-5.2	1010-1100	4.4-4.6	7 kg	601
GM5AH-54	1372 x 150 x 51 mm	1250-1366	5.7-5.9	1148-1250	5.0-5.2	8 kg	627
GM5AH-60	1524 x 150 x 51 mm	1400-1530	6.4-6.7	1288-1400	5.4-5.8	8 kg	659
GM5AH-66	1677 x 150 x 51 mm	1560-1705	7.1-7.4	1433-1560	6.2-6.5	9 kg	694
GM5AH-72	1829 x 150 x 51 mm	1725-1885	7.8-8.2	1584-1725	6.6-7.2	10 kg	725
GM5AH-78	1982 x 150 x 51 mm	1890-2066	8.6-9.0	1736-1890	7.5-7.9	11 kg	754

All Models Feature:

Switch Location: Remote Control Box with power On/Off switch included.
Leads: 1524 mm Power Leads.

Vertical Surface Mounted Control Box: 229 W x 51 H mm.

Under Shelf Mounted Control Box: 236 W x 51 H mm.

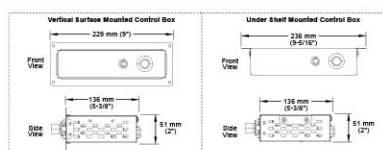

With Sneezeguard Mounting Kit Accessory

OPTIONS (available at time of purchase only)

Non-Adjustable Tubular Stands, bottom mount, attach to counter – match unit color

NLT5-16 407 mm clearance

1 pair 45

ACCESSORIES (available for purchase at any time)

SG5-BKT-CLA sneezeguard mounting kit

\$ 69/set

SEE MANUAL FOR RECOMMENDED MOUNTING HEIGHTS

GM5AH-xx

GLOMAX® ————
Curved ————
Aluminum Housing ————

Width (inches)
H = High Watt

GLOMAX® Curved Infrared Strip Heaters with LED Lights

Hatco's GLOMAX® Curved Infrared Strip Heaters with LED Lights feature a housing design that is low-profile, elliptical-shaped and stylish, the ideal solution for front-of-the-house applications where heat and lights are needed.

- Narrow, curved design: 51 H x 150 D mm uses a very small footprint
- Lengths available from 610-1982 mm
- Energy efficient, warm LED lights span the entire strip heater, which provide longer performance and energy savings compared to standard incandescent bulbs
- Angle Brackets (mounting) standard
- End panels and Angle Brackets match unit color
- Includes Remote Control Box with power On/Off switch (controls lights and heat)
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food



GM5AHL-36 Top and bottom view.

GLOMAX® CURVED INFRARED STRIP HEATERS WITH LED LIGHTS

Model	Dimensions W x D x H	Watts 220-230V	Amps 220-230V	Watts 230-240V	Amps 230-240V	Approx. Weight	List Price
High Watt							
GM5AHL-24	610 x 150 x 51 mm	510-555	2.3-2.4	467-510	2.0-2.1	5 kg	\$589
GM5AHL-30	762 x 150 x 51 mm	670-733	3.0-3.2	616-670	2.7-2.8	6 kg	624
GM5AHL-36	915 x 150 x 51 mm	812-888	3.7-3.9	748-812	3.2-3.4	7 kg	653
GM5AHL-42	1067 x 150 x 51 mm	964-1053	4.4-4.6	885-964	3.8-4.0	7 kg	690
GM5AHL-48	1220 x 150 x 51 mm	1116-1220	5.1-5.3	1025-1116	4.5-4.7	8 kg	723
GM5AHL-54	1372 x 150 x 51 mm	1267-1384	5.8-6.0	1163-1267	5.1-5.3	9 kg	755
GM5AHL-60	1524 x 150 x 51 mm	1418-1550	6.4-6.7	1302-1418	5.7-5.9	9 kg	786
GM5AHL-66	1677 x 150 x 51 mm	1579-1726	7.2-7.5	1450-1579	6.3-6.6	10 kg	833
GM5AHL-72	1829 x 150 x 51 mm	1744-1907	7.9-8.3	1602-1744	7.0-7.3	10 kg	864
GM5AHL-78	1982 x 150 x 51 mm	1910-2088	8.7-9.1	1754-1910	7.6-8.0	11 kg	907


All Models Feature:

Switch Location: Box with Remote Control with power On/Off switch (controls lights and heat) included.

Leads: 1524 mm Power Leads

Vertical Surface Mounted Control Box: 229 W x 51 H mm.

Under Shelf Mounted Control Box: 236 W x 51 H mm.



OPTIONS (available at time of purchase only)

Non-Adjustable Tubular Stands, bottom mount, attach to counter – match unit color

NTL5-16 407 mm clearance

1 pair 45

ACCESSORIES (available for purchase at any time)


SG5-BKT-CLA sneezeguard mounting kit

\$ 69/set

SEE MANUAL FOR RECOMMENDED MOUNTING HEIGHTS



GM5AHL-36/GM5AHL-36 in standard clear anodized with optional 16" non-adjustable tubular stands (legs) , Sneeze Guard not included



GLOMAX® Curved Display Lights

A stylish choice for illuminating your serving area. The HLC5 LED Display Light offers the highest light output that is ideal for illuminating food products with a cool white light(4000K).

The sleek, curved design is patented and the LED lighting delivers significant savings with lower energy consumption and greater reliability.

- Features a patented curved housing design that has energy efficient dual LED lights across the display lamp that provide longer performance and energy savings (compared to standard incandescent bulbs)
- Matches the Hatco line of GLOMAX® Curved Infrared Strip Heaters for a fully integrated look
- 10 lengths are available: 610, 762, 915, 1067, 1219, 1372, 1524, 1677, 1829, 1982 mm



HLC5-48
in standard Clear Anodized Finish
with optional 407 mm non-
adjustable tubular stands (legs)

GLOMAX® CURVED INFRARED STRIP HEATERS

Model	Dimensions W x D x H	Voltage	Watts	Amps	Approx. Weight	List Price
HLC5-24	610 x 150 x 51 mm	220-240	11	0.05	4 kg	\$378
HLC5-30	762 x 150 x 51 mm	220-240	12-13	0.05	4 kg	411
HLC5-36	915 x 150 x 51 mm	220-240	13-14	0.06	6 kg	433
HLC5-42	1067 x 150 x 51 mm	220-240	14-16	0.06-0.07	6 kg	459
HLC5-48	1219 x 150 x 51 mm	220-240	16-17	0.07	6 kg	482
HLC5-54	1372 x 150 x 51 mm	220-240	18	0.08	7 kg	519
HLC5-60	1524 x 150 x 51 mm	220-240	19-20	0.09-0.08	7 kg	546
HLC5-66	1677 x 150 x 51 mm	220-240	21	0.10-0.09	8 kg	570
HLC5-72	1677 x 150 x 51 mm	220-240	22-23	0.10-0.09	8 kg	612
HLC5-78	1982 x 150 x 51 mm	220-240	23-24	0.10	8 kg	647

All Models Feature:

Rocker Switch Location: Under unit on power side.

LED Light Color: Neutral white light (4000K)

Leads: 1524 mm Power Leads.

OPTIONS (available at time of purchase only)

Non-Adjustable Tubular Stands, bottom mount, attach to counter – match unit color

NTL5-16 407 mm clearance

1 pair 45

ACCESSORIES (available for purchase at any time)

SG5-BKT-CLA sneezeguard mounting kit

\$ 69/set

SEE MANUAL FOR RECOMMENDED MOUNTING HEIGHTS

HLC5 - x x

GLOMAX Curved Display Light,
Aluminum Housing

Width (in inches)

GLOMAX® Portable Foodwarmers

Opt for the versatility of Hatco's GLOMAX® Portable Foodwarmers with heat from above. Ideal for use next to drive-through windows and service areas that require frequent and easy access.

- Portable – ready to plug in and use
- Available with incandescent bulbs containing special protective coating to guard against food contamination

GMFFL in standard Designer Black and accessory food pan



Shipped from H.K.

GLOMAX® PORTABLE FOODWARMER WITH METAL SHEATHED ELEMENTS

Model	Dimensions (W x D x H)	Voltage Single Phase 50/60 Hz	Watts	Amps	Ship Weight	List Price
GMFFL	329 x 644 x 445 mm	230	610	2.7	10 kg	\$381

All Metal Sheathed Models Feature:

Model Shipped with: 1829 mm cord and plug, base front sign holder, and clear plastic insert for sign holder.
Cord Location: 1829 mm cord and plug located on back, upper middle.

OPTIONS (available at time of purchase only)

Color – Non-standard colors are non-returnable – Designer Black Standard –
RED Warm Red No Charge



Portable Heated Base Glass Shelf Modular

Hatco's ceramic glass creates uniform heat across the entire top surface. The new design uses a modular system, so units can be placed side-by-side. This allows great flexibility in buffet areas. Each unit's glass surface is the size of a 1/1 GN food pan.

- Electronic temperature control with five settings for 55°, 65°, 75°, 85° and 95°C
- The portable, modular system design offers great flexibility
- Simple design for easy cleaning and maintenance
- Durable stainless steel housing



HGSM-4060



A series of HGSM-4060


Shipped from H.K.

PORTABLE HEATED BASE GLASS SHELF MODULAR

Model	Dimensions W x D x H	Voltage Single Phase 50/60 Hz	Watts	Amps	Ship Weight	List Price
HGSM-4060	400 x 600 x 58 mm	230	300	1.3	8 kg	\$561

All Portable Heated Base Glass Modular Shelf Models Feature:

Cord Location: 1829 mm cord and plug located at left back of unit.



DRAWERMAX® Drawer Warmers

Hold everything from meat to vegetables to rolls in Hatco Drawer Warmers. Built for tough kitchen duty with rugged construction and heavy-duty hardware, these warmers keep a variety of foods hot and fresh until served.

- Units come in Freestanding or Built-in
- Independent temperature control and ON/OFF power switch on each drawer
- Heavy-duty construction with durable drawer frame and slides
- Includes 1 full-size stainless steel 150 mm food pan for each
- Adjustable vents control moisture on

- each drawer
- Angled chrome handle deflects cart traffic
- Easy to clean, black powdercoated exterior (Freestanding units only)



HDM-2



HDM-3N

Shipped from  H.K.

DRAWERMAX® DRAWER WARMERS

Model	Dimensions W x D ^F x H*	Voltage		Watts	Amps	Ship Weight Includes weight of pans	List Price
		Single Phase	50/60 Hz				
Freestanding Models - Standard							
HDM-1	749 x 576 x 279 mm	120	450	450-535	3.8	44 kg	\$1205
		220-240	900	900-1071	2.0-2.2		
HDM-2	749 x 576 x 513 mm	120	900	900-1071	7.5	76 kg	2144
		220-240	1350	1350-1606	4.1-4.5		
HDM-3	749 x 576 x 748 mm	120	1350	1350-1606	11.3	105 kg	2881
		220-240			6.1-6.7		
Freestanding Models - Narrow							
HDM-1N	530 x 686 x 279 mm	120	450	450-535	3.8	44 kg	\$1300
		220-240	900	900-1071	2.0-2.2		
HDM-2N	530 x 686 x 513 mm	120	900	900-1071	7.5	76 kg	2133
		220-240	1350	1350-1606	4.1-4.5		
HDM-3N	530 x 686 x 748 mm	120	1350	1350-1606	11.3	105 kg	3386
		220-240			6.1-6.7		
Built-In Models - Standard							
HDM-1B	743 x 568 x 277 mm	120	450	450-535	3.8	40 kg	\$1158
		220-240	900	900-1071	2.0-2.2		
HDM-2B	743 x 568 x 512 mm	120	900	900-1071	7.5	72 kg	2099
		220-240	1350	1350-1606	4.1-4.5		
HDM-3B	743 x 568 x 747 mm	120	1350	1350-1606	11.3	101 kg	2889
		220-240			6.1-6.7		
Built-In Models - Narrow							
HDM-1BN	523 x 679 x 276 mm	120	450	450-535	3.8	40 kg	\$1197
		220-240	900	900-1071	2.0-2.2		
HDM-2BN	523 x 679 x 511 mm	120	900	900-1071	7.5	72 kg	2048
		220-240	1350	1350-1606	4.1-4.5		
HDM-3BN	523 x 679 x 746 mm	120	1350	1350-1606	11.3	101 kg	2959
		220-240			6.1-6.7		

* Add 102 mm (4") to Height for units with standard 102 mm (4") plastic legs (add 152 mm [6"] for units with 152 mm [6"] legs).

^F Add 1.25" (32 mm) to depth for drawer handle.

Models Feature: Cord Location: Back of unit, lower left corner.


OPTIONS (available at time of purchase only)

Color – Non-standard colors are non-returnable – Designer Black Standard –

SS1	Stainless Steel (1-Tier Freestanding Only)	\$ 58
SS2	Stainless Steel (2-Tiers Freestanding Only)	93
SS3	Stainless Steel (3-Tiers Freestanding Only)	140

ACCESSORY

HDM-TRIVET	Trivet raises food product off bottom of full size pan	\$66
HDM-CASTER-3	Locking Casters	268
HDM-SPIII	Water/Spillage Pan – one per drawer	302
HDM-SPLASH	Splash Baffle – one per drawer	60
HDM-6" PAN	Stainless Steel Food Pan – one per drawer	56

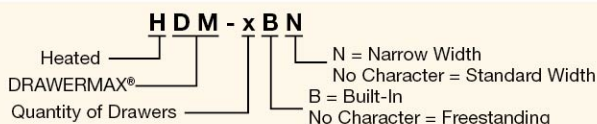

GLOMAX® Heated Display

Hatco's GLOMAX® Heated Display Cases are designed to hold prepared foods for prolonged periods of time while maintaining that "just made" quality.

The Hatco Heated Display Case maintains peak serving temperatures, combined with humidity, giving you a display case that holds wrapped or unwrapped foods longer than conventional holding equipment.

GMHD-2PT

- Adjustable shelves can move up and down the back support posts and can be horizontal or slanted
- Energy efficient LED lighting to illuminate your food display
- Water pan to provide humidity for extended holding of products up to several hours
- Thermostatic mechanical heat control
- Holds up to six food pans with trivets
- Standard sign holder (480 x 100 mm) promotes your product offerings on the bottom front of unit (sign not included)

GMHDH-3PT

- Non-adjustable slanted shelves to show off food products
- Energy efficient LED lighting to illuminate your food display
- Electronically controlled humidity system with a 3.4 liter capacity water reservoir
- Thermostatic electronic heat control
- Holds up to nine food pans with trivets



GMHD-2PT
in Stainless Steel



GMHDH-3PT
in Optional
Designer Black

Shipped from H.K.

GLOMAX® HEATED DISPLAY

Model	Dimensions W x D x H	Voltage		Watts	Amps	Shipping Weights	List Price
		Single Phase	50/60 Hz				
GMHD-2PT	480 x 400 x 676 mm	220-230-240		615-670-730	2.8-2.9-3.1	36 kg	\$1338
GMHDH-3PT	670 x 464 x 757 mm	220-230-240		1280-1400-1525	5.8-6.1-6.3	57 kg	2677

All Heated Display Cases Features:

Models Shipped with:

GMHD-2PT: Rear glass sliding doors, adjustable shelves, LED lights, front sign holder (sign not included), six food pans with trivets, water pan for humidity, 25 mm adjustable legs and a 1829 mm cord with plug.

GMHDH-3PT: Rear glass sliding doors, LED lights, nine food pans with trivets, built-in water tank for humidity, 25 mm adjustable legs and a 1829 mm cord with plug.

Water Tank Capacity for Humidity System: 3.4 liters.

Cord Location: 1829 mm cord and plug located back right of unit.


OPTIONS (available at time of purchase only)

Color – Non-standard colors are non-returnable – Stainless Steel Standard –
BLACK Designer Black

\$91

ACCESSORY

TRIVET 265X205	265 X 205 mm, raises food product off bottom of food pan	\$18
PAN 265x205	265 X 205 mm, stainless steel food pan	16
GMHDT HUMPAN	Water pan, stainless steel (GMHD-2PT only)	15

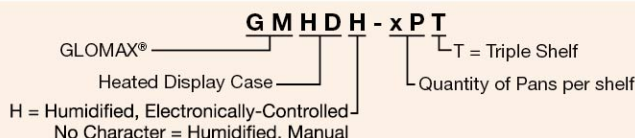

Glo-Ray 2-Go™ Heated Shelves

The Hatco Glo-Ray 2-Go™ Heated Shelves are designed specifically with your delivery and carry-out needs in mind. Capable of holding a great quantity of hot food items at optimum serving temperatures, the GRS2GC models hold bags and boxes up to 30 minutes with a high temperature range of up to 93° C.

- Shelves are 507 mm deep and 986 mm wide, with a 289 mm clearance between shelves that is large enough to fit a variety of carry-out/delivery bags and boxes.
- Each shelf features a digital temperature control, a power On/Off switch, and a jumper power cord
- Units feature stainless steel shelves with heated bases that are thermostatically-controlled



GRS2GC-3920-2



GRS2GC-3920-4



Power On/Off switch, and a jumper power cord for each shelf



Digital temperature control for each shelf

Shipped from  H.K.

HEATED SHELVES								
Model	Description	Dimensions W x D x H	Voltage	Watts	Amps	Ship Weight	List Price	
GRS2GC-3920-2	2 heated shelves	986 x 507 x 475 mm	220-240	694-824	3.2-3.4	21 kg	\$1299	
GRS2GC-3920-4	4 heated shelves	986 x 507 x 1390 mm	220-240	1393-1648	6.3-6.9	40 kg	2399	

All Heated Shelf Models Feature:
Models shipped with: 102 mm adjustable plastic feet and a 1829 mm power cord and plug.
Cord Location: Server side, bottom right corner.

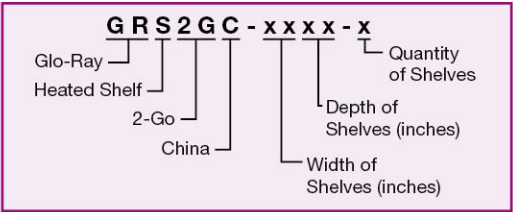


Plate Warmers

Hatco's Plate Warmers are designed to hold preheated serving plates where your customers can access them easily. Countertop or Built-In models available. Easy to load and easy to clean. Serving hot food on preheated plates will help extend the holding times of most foods, and adds to a better customer experience.

- Can hold 25 plates up to 305 mm in diameter
- A covered, digital temperature control with an adjustable range of 40° - 50°C
- Energy efficient LED lighting illuminates the interior from the top
- Optional *Designer Black* Powdercoating
- Cabinet cutout dimensions are: 423 x 512 mm



PWC-12
in Standard
Stainless Steel



PWC-12
in Optional
Designer Black



Digital display and power switch

Shipped from H.K.

PLATE WARMERS

Model	Dimensions (W x D x H)	Opening Dimensions (W x H)	Voltage Single Phase 50/60 Hz	Watts	Amps	Ship Weight	List Price
Counter Top							
PWC-12	427 x 441 x 566 mm	320 x 400 mm	220-230-240	389-425-463	1.7-1.8-1.9	29 kg	\$1363
Built-In							
PWB-12	444 x 442 x 534 mm	322 x 400 mm	220-230-240	389-425-463	1.7-1.8-1.9	22 kg	\$1262

All Plate Warmer Models Feature:

Models Shipped with:

PWC-12: Power On/Off switch, a detachable 1829 mm power cord, a 1000 mm jumper cord and a wall-mounting kit.

PWB-12: Power On/Off switch, a detachable 1829 mm power cord and a 1000 mm jumper cord.

Cabinet cut-out dimensions for PWB-12: 423W x 512H mm.


Cord Location: 1829 mm power cord located back of unit, top left side.

OPTIONS (available at time of purchase only)

Color – Non-standard colors are non-returnable – Stainless Steel Standard – BLACK

Designer Black

\$138



Flav-R-Fresh® Impulse Display Cabinets

A profitable way to create impulse food sales is with the small Flav-R-Fresh® Holding and Display Cabinet. Using separate heat and humidity controls to keep crisp foods crisp and moist foods moist allows you to showcase your products longer using minimum counter space.

- Full-view display with tempered glass sides and door
- Incandescent light enhances food appeal while safeguarding food products from bulb breakage
- Internal thermometer indicates cabinet temperature
- Single- or double-door opening models provide fast access to food racks
- Food decals and merchandising signs are available to help promote product visibility and appeal



FDWDE-1 with
rotating 4-tier rack
and accessory pans

Shipped from  U.S.A.

FLAV-R-FRESH® IMPULSE DISPLAY CABINETS

Model ^u	Description ^v	Dimensions W x D x H Height includes standard 25 mm legs	Voltage Single Phase 50/60 Hz	Watts	Amps	Ship Weight	List Price ^o	
							120V	220V
FDWDE-1	1 Door w/Circle Rack w/Motor	492 x 530 x 726 mm	220	1470	6.7	38 kg	\$3493	\$3543
FDWDE-1X	1 Door w/Multi-Purpose Rack	492 x 530 x 726 mm	220	1470	6.7	38 kg	3386	3436
FDWDE-2	2 Doors w/Circle Rack w/Motor	492 x 559 x 726 mm	220	1470	6.7	40 kg	3673	3723
FDWDE-2X	2 Doors w/Multi-Purpose Rack	492 x 559 x 726 mm	220	1470	6.7	40 kg	3539	3589

^u Models FDWDE-1 and FDWDE-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.

^o For non-humidified cabinet, deduct \$210. Unit will only operate in dry mode. Contact factory for spec information.

^v Rack listed is included with unit. Other racks available – deduct price of included rack and add price of substituted rack to list price.

All Impulse Cabinet Models Feature:

Cabinet Opening Dimensions: 400 W x 502 H mm.


Door Hinges: Control Side: Left-hand side.

Customer Side (Two-door models only): Right-hand side.

Max. Pizza Pan Size: 381 mm diameter.

Water Tank Capacity for Humidity System: 2 liters.

Cord Location: 1829 mm cord and plug. Facing controls, left-hand side panel, lower right corner.

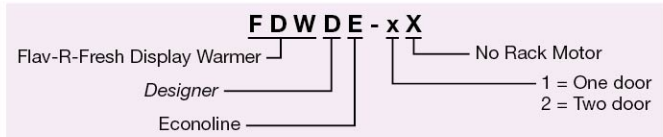

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Aluminum Standard –

RED	Warm Red	\$401
BLACK	Black	401
GRAY	Gray Granite	401
WHITE	White Granite	401
NAVY	Navy Blue	401
GREEN	Hunter Green	401
COPPER	Antique Copper	401

FDWD-6FRT	152 mm Merchandising Display Sign Holder for Control side only (includes Metal Holder only). Available in all Designer Colors to match your unit (Black is standard). Adds 29 mm to height of unit. Requires (1) Sign 491 W x 157 H x 2 D mm – not included	\$121
-----------	---	-------

FDWD-6SIGN	162 mm, One Sided Merchandising Display Sign Holder (Includes metal holder and window) – one per side, three maximum. Available in all Designer colors to match your unit (Black is Standard). Adds 32 mm to height of unit. Requires (1) sign 491 W x 159 H x 1.59 D mm – not included	94
------------	---	----

FDWD-DIS	76 mm One-Sided Merchandising Display Sign Holder (includes Metal Holder and Window) – one per side, three maximum. Available in all Designer colors to match your unit (Black is standard) Adds 32 mm to height of unit. Requires (1) one Sign 484 W x 83 H x 2 D mm – not included	86
----------	--	----

ACCESSORIES

FDWD-LEGS	102 mm Adjustable Legs (102-127 mm)	\$ 89
COUPLING	Motorless Rack Coupling for FDWDE-1X and -2X models (select Circle Rack or Pretzel Tree)	49
FDWD4TCRR	4-Tier Circle Rack with Pizza Pan Retainers (Requires Coupling for -1X or -2X models)	266
FDWSMP	4-Shelf Multi-Purpose Rack (each shelf 346 W x 321 D mm)	301
FDW3TPT	3-Tier Pretzel Tree (requires Coupling for -1X or -2X models)	301

Pop-Up Toaster

Perfect for self-serve areas and light volume applications, the Hatco Pop-Up Toasters provide even golden toasting of a variety of bread products. The durable stainless steel housing contains four self-centering slots with individual toasting controls and removable crumb tray.

- Evenly toasts a variety of bread products including bagels, waffles and English muffins
- Four self-centering 32 mm wide slots
- A selector switch for single- (or double-) sided toasting
- Durable stainless steel construction
- Individual toasting controls
- Removable crumb tray for easy cleaning
- 1829 mm cord with plug



TPT-230-4


Shipped from  H.K.

POP-UP TOASTER

Model	Dimensions W x D x H	Slot Opening	Voltage Single Phase 50/60 Hz	Watts	Amps	Ship Weight	List Price
TPT-230-4	346 x 313 x 204 mm	32 W x 140 D mm	230	2388	10.4	8 kg	\$534

The Pop-Up Model Features:

Cord Location: 1829 mm cord located bottom back center.

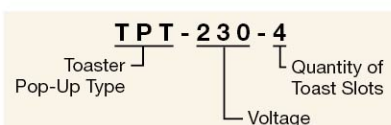

TOAST-MAX® Conveyor Toasters

The TOAST-MAX® Electric Conveyor Toaster is fast, reliable and versatile, toasting up to 350 bread or bun products per hour, depending on bread type. Featuring long-lasting serpentine metal sheathed heating elements and a permanently lubricated conveyor motor.

- Durable stainless steel construction
- ColorGuard Sensing System ensures toast color uniformity
- Powersave mode with indicator light saves energy during off-peak periods
- Allows for toasting bread products up to 76 mm thick
- Utilizing conveyor speed, not temperature, to determine toasting color, allows for instant adjustment of toasting time
- Units are shipped with 25 mm adjustable legs, feed ramp, removable crumb tray and a catch tray



TM3-10H in Designer Black, Designer Warm Red and Standard Stainless Steel

Shipped from  H.K.

TOAST-MAX® CONVEYOR TOASTERS

Model	Dimensions W x D x H	Slot Opening W x H	Voltage Single Phase 50/60 Hz	Watts	Amps	Capacity/ Hour†	Ship Weight	List Price
TM3-5	290 x 538 x 412 mm	186 x 51 mm	220-230-240	1320-1445-1575	6.0-6.3-6.6	190-230	16 kg	\$1073
TM3-5H	290 x 538 x 412 mm	186 x 76 mm	220-230-240	1320-1445-1575	6.0-6.3-6.6	190-230	16 kg	1073
TM3-10	368 x 538 x 411 mm	264 x 51 mm	220-230-240	1920-2100-2285	8.7-9.1-9.5	290-350	19 kg	1395
TM3-10H	368 x 538 x 411 mm	264 x 76 mm	220-230-240	1920-2100-2285	8.7-9.1-9.5	290-350	19 kg	1395

† Toasting capacity may vary by product. Toasting of coated products not recommended.

The TOAST-MAX Model Features:

Cord Location: 1829 mm cord and plug located back of unit, bottom right side.


OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Stainless Steel Standard –

RED	Warm Red	No Charge
BLACK	Black	No Charge

ACCESSORIES

TM3-10-BUNFEED	Extended Feed Ramp for Buns (TM3-10H model only)	\$18
TM3-10-SECURITY	Control Cover and Bracket (TM3-10H model only)	46

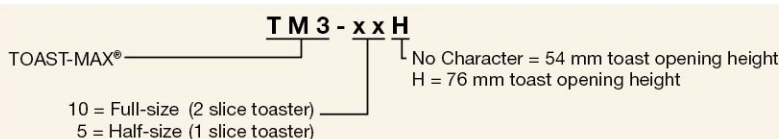

TOAST-MAX® Conveyor Toasters

Flexibility and performance are yours with Hatco's economical line of TOAST-MAX® Conveyor Toasters. Using conveyor speed, not temperature, to determine toasting color allows for instant adjustment of toasting time.

- Instant and precise adjustment of toast color with electronic infinite controls that regulate top and bottom heat
- Power Save Mode conserves energy
- Insulation and an interior fan provide cool surface temperatures
- Efficient design of front or rear discharge allows unit to be placed where it is most convenient for sending product to the operator side or to the customer/server side



TM-5H



TM-10H

Shipped from  H.K. or  U.S.A.

TOAST-MAX® CONVEYOR TOASTERS

Model	Dimensions W x D x H*	Slot Opening W x H	Voltage Single Phase 50/60 Hz	Watts	Amps	Capacity Per Minute†	Ship Weight	List Price
TM-5H	290 x 419 x 387 mm	186 x 88 mm	220-230-240	1340-1465-1595	6.1-6.4-6.6	3 slices	16 kg	\$1012
TM-10H	368 x 419 x 387 mm	264 x 88 mm	220-230-240	1940-2120-2300	8.8-9.2-9.6	6 slices	19 kg	1121

* Add 196 mm to depth if using tray extension in rear. Height includes legs.

† Toasting capacity may vary by product. Toasting of coated products not recommended.

All TOAST-MAX Models Feature:

Bread Types: Bread or buns.

Cord Location: 1829 mm cord and plug located on left side of back of unit near bottom.

TOAST-MAX® **T M - x x H**
 5 = One Slice Wide
 10 = Two Slice Wide
 High Opening

THERMMAX® Salamander

Hatco's THERMMAX® Salamander is specially designed for versatility in the kitchen with the capabilities to cook, grill and reheat food. The unparalleled start-up speed is a result of "Instant/On" heating elements located in the upper housing of the salamander. The THERMMAX Salamander is energy efficient and easy to operate.

- The high-powered heating elements are ready for use within 8 seconds
- Two sets of independently-controlled heating element sections give the benefits of flexibility and energy conservation
- Cook mode selection switch controls left, right or both locations
- Units have 10 minute mechanical timer
- Made of stainless steel for easy cleaning and durability
- Can be placed on a countertop or mounted to a brick or cement wall
- Hold mode switch provides 25% more power (TMS-1H models only)



Shipped from  H.K.

THERMMAX® SALAMANDER

Model	Dimensions W x D x H	Cooking Area W x D x H	Voltage 50/60 Hz	230V Single Phase		230/400V Three Phase		Ship Weight	List Price
				Watts	Amps	Watts	Amps		
TMS-1	600 x 503 x 517 mm	540 x 373 x 90-260 mm	230/400	4000	17.4	4000	8.7	70 kg	\$3147
TMS-1	600 x 503 x 517 mm	540 x 373 x 90-260 mm	240/415	4000	8.7	4000	8.7	70 kg	3147
TMS-1H	600 x 503 x 517 mm	540 x 373 x 90-260 mm	230	4000	17.4	—	—	70 kg	\$3147
TMS-1H	600 x 503 x 517 mm	540 x 373 x 90-260 mm	240	3673	16.0	—	—	70 kg	3147


All THERMMAX Salamander Models Feature:

Models Shipped with: Grill, drip pan and wall mounting bracket.

Power Location:

TMS-1: Right side of back of unit near bottom (no cord).

TMS-1H: 2000 mm cord on right side of back of unit near bottom.

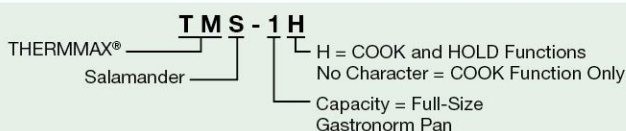

High-Speed Salamander

TMS2-1H is Hatco's second generation high-speed Salamander with electronic controls. Using a gravity sensor and infrared technology, the optimum temperature is reached instantly and efficiently when food products are placed on the grill plate.

- Instant-On heating elements located in the upper housing
- Plate detection feature activates the Instant-On heating elements when a food plate is placed on the grill plate, and deactivates when removed
- Heating elements are only on when in use, eliminating residual heat in the kitchen
- Made of stainless steel for easy cleaning and durability
- Can be placed on a countertop or wall-mounted
- Hold mode could be adjusted to save 25%-50% power
- Adjustable upper housing give 6.7" (170 mm) of vertical movement
- Flat, tactile control panel




Shipped from  H.K.

THERMMAX® SALAMANDER

Model	Dimensions W x D x H	Cooking Area W x D x H	Voltage	Watts	Amps	Phase	Ship Weight	List Price
TMS2-1H	630 x 505 x 568 mm	540 x 373 x 90-262 mm	230	4133	17.2	1	80 kg	\$3603
			400	4133	6.0	3		

All THERMMAX Salamander Models Feature:

Models Shipped with: Grill, drip pan and wall mounting bracket.

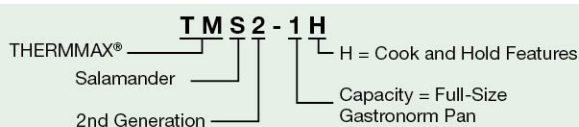

FLOWMAX®
Under-Counter
Water Dispenser

The Hatco FLOWMAX® Under-Counter Water Dispenser delivers hot or ambient water for food preparation, drinking or cleaning. With a temperature range from 65° - 95°C and programmable on-demand dispense volume, you have hot water at your fingertips.

- 5 liter stainless steel tank
- Stylish faucet design with a tear-drop shape base mount and easy-touch controls
- Energy-saving, programmable power-save mode
- Built-in filter with a 0.5 micron rating



Shipped from  H.K.

FLOWMAX® UNDER-COUNTER WATER DISPENSER

Model	Dimensions	Dimensions	Voltage	Watts	Hz	Amps	Ship Weight	List Price
	Above counter W x D x H	Under-counter unit W x D x H	Single Phase 50/60 Hz					
FM-5	46 x 46 x 167 mm	342 x 362 x 391 mm	230	1800	50/60	7.8	18 kg	\$2409

All Under-Counter Water Dispenser Models Feature:
Models shipped with: 5 liter stainless steel tank, 125 mm faucet extension, drain font, a water filter and a 1.3 m cord and plug set.
Liquid Capacity: 25 liters hot water per hour.
Cord Location: 1829 mm cord and plug located on rear right from front view.



Faucet extension adds 130 mm to height on top




Faucet touch control - Hot and Ambient -



Under-Counter main unit



Under-counter main unit control panel

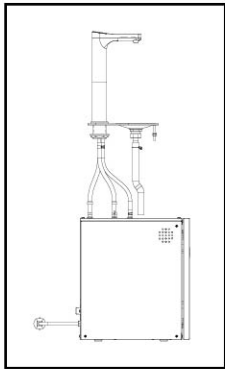

Drawing of unit, above and under counter

FLOWMAX®

FM - 5

Water Tank Capacity (liters)


Limited Warranty

For the full information pertaining to the Hatco warranty protection for your equipment, go to our website at:

www.hatcocorp.com

Step 1: make sure you are on your region

Step 2: in the SUPPORT drop-down at the top of the page, select WARRANTY

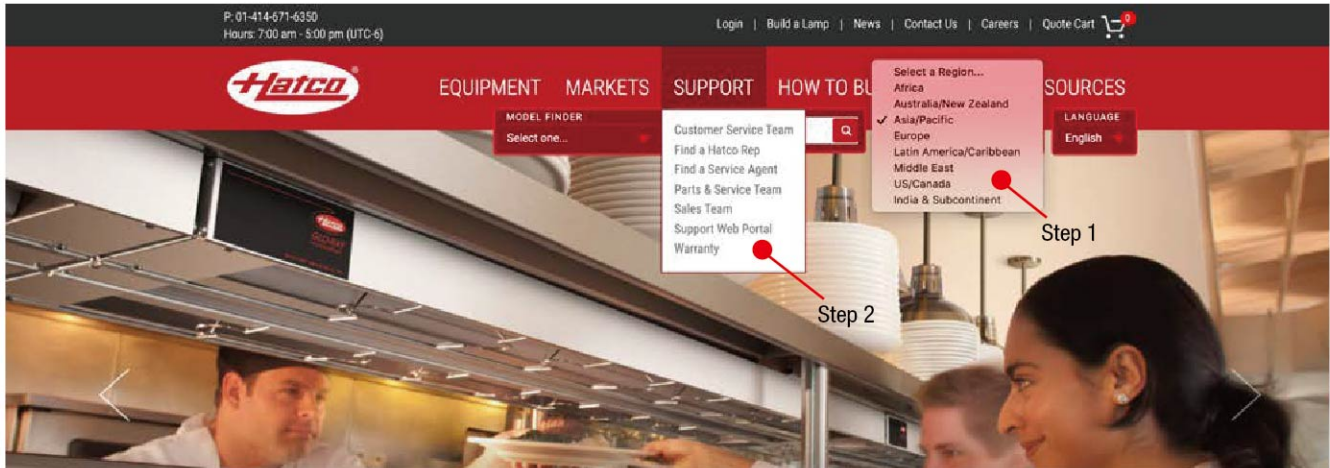

Ordering Procedures

CUSTOMER NOTE –

To ensure prompt and accurate processing of your order, please provide the following information:

ALL PRODUCTS –

1. Model number, voltage, 50, 60 or 50/60 Hertz and phase, specify if CE Mark is required.
2. Specify options and accessories as required. Options are not retrofittable.
3. Consult factory when ordering equipment for special applications.
4. E-mail orders are acceptable and do not require confirmation.

**ALL WATT RATINGS ARE NOMINAL. ACTUAL WATTAGE MAY VARY.
CONSULT FACTORY FOR MORE INFORMATION.**

Returns

No product will be accepted on a return shipment without a Material Return Authorization from Hatco Export Sales Department. Products returned at customer's convenience are subject to inspection and a restocking charge of 25% of EX-WORKS, freight and related expenses for shipper's account; contact Hatco Export Department. Decorative Heat Lamps (DL Series) are non-returnable.

DAMAGED FREIGHT POLICY

All freight should be inspected during the receiving process for possible damage. Should there be a question about the condition of the equipment, it is better to refuse the shipment. If damage is found after delivery, it is the consignee's (receiver) responsibility to notify the carrier within **5 days** of delivery.

All Hatco Shipments specify an Incoterm 2010 in which the shipment was made. Incoterms determine who bears the risk of cargo damage or loss at any given point of shipment and therefore who pays in the event of loss or damage. If it is found that any part of the shipment has sustained damage during transportation, Hatco Corporation must be contacted as well as immediately notifying the last carrier.

For assistance, contact Hatco via e-mail at:
intlshipping@hatcocorp.com and provide information listed below

1. Hatco Shipment Number
2. Delivery date and date damage was discovered
3. Contact name, phone number and email address
4. Type of unit damaged including model and serial number
5. Extent of damage
6. Pictures of damage as well as packaging