

univerbar

***HIGH
QUALITY***

*DISHWASHING
MACHINES*



PLUS LINE

*I prodotti della **PLUS Line Univerbar** si contraddistinguono per la **pulsantiera elettronica** che permette al cliente di avere una macchina tarata ad hoc:*

- **5 tempi di lavaggio personalizzabili**,
- **doppio display per la visualizzazione delle temperature**,
- **pulsante principale che cambia colorazione in base allo step di lavaggio**
- **21 parametri personalizzabili a disposizione del tecnico per garantire sempre il corretto set-up.**

*All'interno dei prodotti della **PLUS Line** è installato il **dosatore brillantante elettrico** che garantisce un'asciugatura di qualità ad ogni ciclo di lavaggio.*

*I prodotti **PLUS** includono la funzione **soft start** che elimina gli sbuffi di vapore che potrebbero fuoriuscire dallo sportello all'avvio del lavaggio.*

*Inoltre, la **funzione ecoboiler** aiuta a ridurre i consumi elettrici.*

*Questi prodotti possono vantare anche altri optional aggiuntivi, tra i quali: un **thermostop**, che assicura un risciacquo caldo a 85° C (185 °F).*

*Products from **Univerbar's PLUS Line** stand out for **electronic touch buttons** which allow the client to customise settings:*


- *there are **5 washing times** to choose from, a double display that shows the temperature,*
- *main **switch** that **changes colour** according to the washing phase*
- *There are also **21 different tailored parameters** that technicians can program to guarantee a consistently correct set-up.*

***PLUS Line** products come with an **electric rinse-aid pump** which guarantees the best quality drying results for every washing cycle.*

***PLUS** products include a **soft start** function, which prevents steam from escaping from the door when washing starts. Furthermore, the **eco-friendly hot water** option helps reduce electric consumption. These products could also feature optional accessories, including: a **thermal-stop** option, which insures an 85° C (185 °F) hot rinse.*

LEGGENDA

EASY FRONT ACCESS TO ALL PARTS

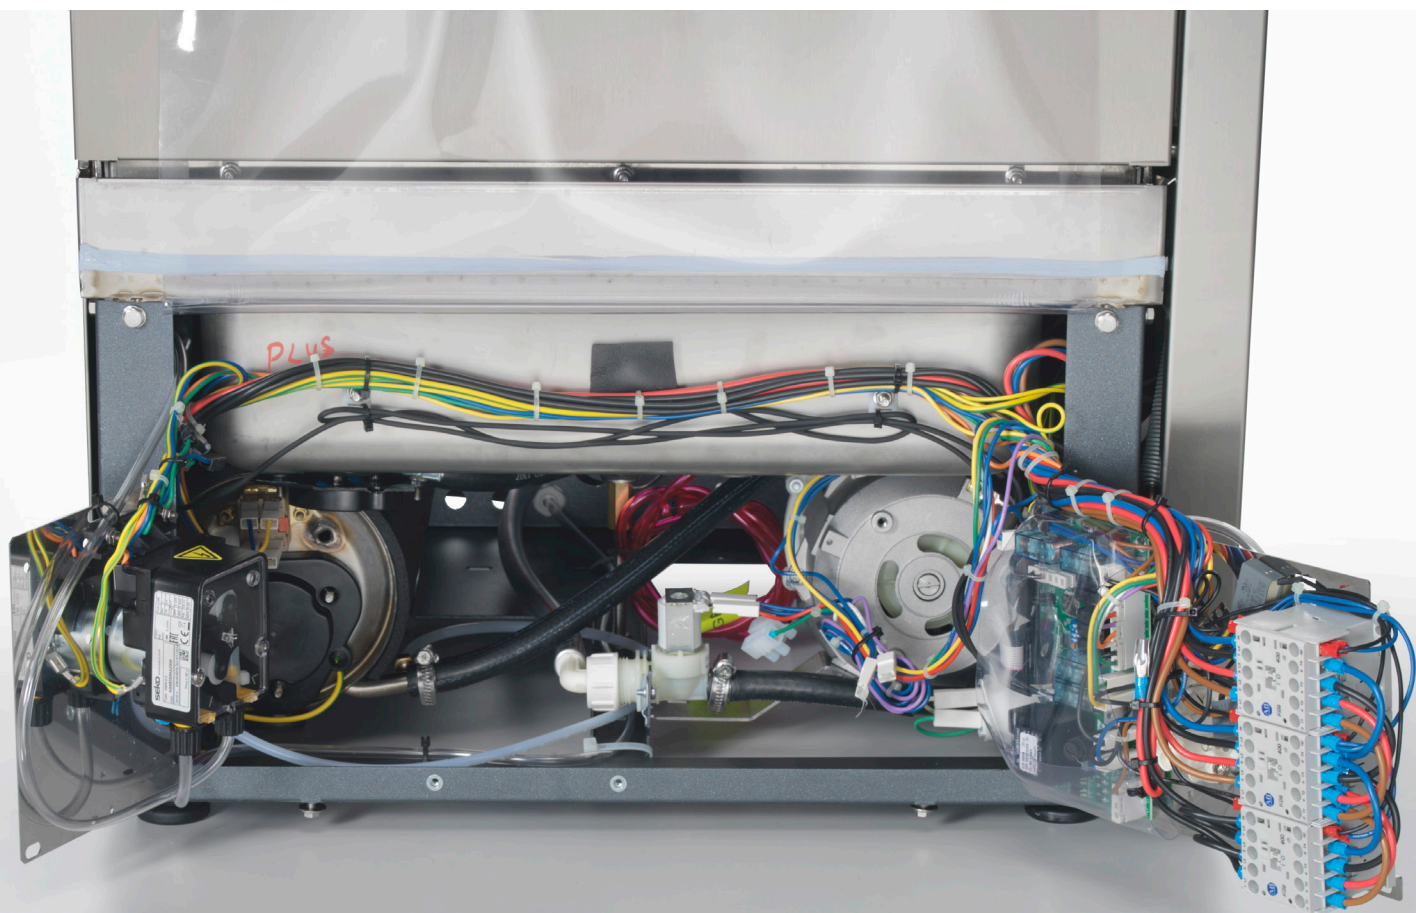

	DI SERIE	STANDARD	STANDARD	STANDARD	ESTÁNDAR
	Manutenzione facilitata	Easy maintenance	Erleichterte Wartung	Maintenance facilitée	Mantenimiento facilitado
	Dosatore brillantante elettrico	Elettrical rinse-aid pump	Elektrischer Klarspülmitteldosierung	Doseur produit de rinçage électrique	Dosificador de abrillantado eléctrico
	KIT installazione con tubi e piedini.	Installation kit with tubes and feet.	Installation kit with tubes and feet.	Installation kit with tubes and feet.	Installation kit with tubes and feet.
	Temperature regolabili	Adjustable temperatures	Einstellbare Temperaturen	Températures réglables	Temperaturas ajustables
	Allaccia acqua calda	Hot-water connection	Warmwasseranschluss	Raccordement à l'eau chaude	Conexión de agua caliente
	Doppio display digitale	Double digital display	Doppelte Digitalanzeige	Double affichage numérique	Doble pantalla digital
	Personalizzazione parametri	Parameter Customization	Anpassung der Parameter	Personnalisation des paramètres	Personalización de parámetros
	Partenza graduale	Soft Start	Schrittweiser Start	Démarrage graduel	Inicio gradual

PLUS LINE

	IT	EN	DE	FR	ES
	CARATTERISTICHE TECNICHE	TECHNICAL FEATURES	TECHNISCHE MERKMALE	CARACTÉRISTIQUES TECHNIQUES	CARACTERÍSTICAS TECNICAS
	Alimentazione Elettrica	Electrical supply	Elektroanschluß	Tension d'alimentation	Alimentación eléctrica
	Resistenza Boiler	Boiler heating element	Boilerheizung	Résistance boiler	Resistencia boyler
	Resistenza Vasca	Tank heating element	Beckenheizung	Résistance de la cuve	Resistencia cuba
	Elettropompa	Wash pump	Umwälzpumpe	Pompe de lavage	Electrobomba
	Capacità Boiler	Boiler capacity	Boilerinhalt	Capacité du boiler	Capacidad en boyler
	Capacità Vasca	Tank capacity	Tankinhalt	Capacité de la cuve	Capacidad en cuba
	Consumo acqua 3 bar	Water use at 3 bar	Wasserverbrauch bei 3 bar	Consommation eau a 3 bar	Consumo agua 3 bar
	Pressione acqua alimentazione	Water supply pressure	Fließwasserdruck	Pression eau d'alimentation	Presión agua alimentaciòn
	Doppia parete	Double wall	Doppelte Wand	Double paroi	Doble pared
	Sistema lavaggio inferiore e superiore con getti inox	Lower wash system and upper wash system with stainless jets	Untere Waschanlage und obere Waschanlage mit Edelstahldüsen	Système de lavage inférieur et système de lavage supérieur avec jets en acier inoxydable	Sistema de lavado inferior y sistema de lavado superior con chorros de acero inoxidable

BET 40 S PLUS



STRENGTHS

- 1 **DEEP DRAWN TANK**
- 2 **FRONT ACCESSIBILITY**
- 3 **EASY MAINTENANCE**
- 4 **PERSONALIZED FUNCTIONS**
- 5 **DOUBLE DISPLAY WITH TEMPERATURES VIEW**
- 6 **ELECTRIC DETERGENT AND RINSE-AID PUMP**

MAIN FEATURES

5	Washing cycle times
3,25 Kw	Consumption Kw/h times
29 cm	Washing height (11,4 in)
40 cm	Basket size (15,7 in)

Technical features/ Características técnicas

Electrical supply



230V/ 50-60 Hz/1-ph

Boiler heating element



W 3000

Tank heating element



W 2000

Double wall



Partial

Wash pump



Hp 0,20

Boiler capacity



4 lt

Tank capacity



6.5 lt

Water use at 3 bar (PSI 44)



3 lt/ cycle

Water supply pressure




bar (PSI) 3-5 (44-72)

Lower/ wash upper wash system with stainless jets




Lower


Fronte/Front



Lato/Side



Dietro/Back



INCLUDED



Built-in drain pump



Electrical rinse-aid pump



Detergent pump

STANDARD BASKET



For more information, see the Basket and Accessories section.

LOGOS 22 PLUS 230



STRENGTHS

- 1 **DEEP DRAWN TANK AND INSULATED BOILER**
- 2 **FRONT ACCESSIBILITY**
- 3 **EASY MAINTENANCE**
- 4 **PERSONALIZED FUNCTIONS**
- 5 **DOUBLE DISPLAY WITH TEMPERATURES VIEW**
- 6 **ELECTRIC DETERGENT AND RINSE-AID PUMP**
- 7 **DOUBLE WALL - FULL**

MAIN FEATURES

5	Washing cycle times
3,9 Kw	Consumption Kw/h times
35 cm	Washing height (13,4 in)
50 cm	Basket size (19,7 in)

Technical features/ Características técnicas

Electrical supply



230V/ 50-60 Hz/1-ph

Boiler heating element



W 3000

Tank heating element



W 2000

Double wall



Total

Wash pump



Hp 1

Boiler capacity



6 lt

Tank capacity



21 lt

Water use at 3 bar (PSI 44)



3 lt/ cycle

Water supply pressure



bar (PSI) 3-5 (44-72)

Lower/ wash upper wash system with stainless jets




Upper and lower


Fronte/Front



Lato/Side

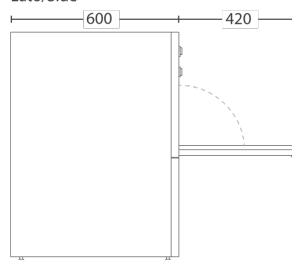

Dietro/Back

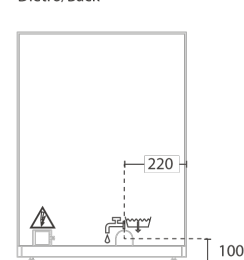

INCLUDED



Built-in drain pump





Electrical rinse-aid pump



Detergent pump

STANDARD BASKET



For more information, see the Basket and Accessories section.

COMPACT PLUS



STRENGTHS

- 1 **DEEP DRAWN TANK**
- 2 **FRONT ACCESSIBILITY**
- 3 **EASY MAINTENANCE**
- 4 **PERSONALIZED FUNCTIONS**
- 5 **DOUBLE DISPLAY WITH TEMPERATURES VIEW**
- 6 **ELECTRIC DETERGENT AND RINSE-AID PUMP**
- 7 **WASHTANK FILTER**

MAIN FEATURES

5	Washing cycle times
7 Kw	Consumption Kw/h times
40 cm	Washing height (15,7 in)
50 cm	Basket size (19,7 in)

Technical features/ Características técnicas

Electrical supply



230V/ 50-60 Hz/ 1-ph

Boiler heating element



W 6000

Tank heating element



W 3000

Double wall



Partial

Wash pump



Hp 1,2

Boiler capacity



6 lt

Tank capacity



27 lt

Water use at 3 bar (PSI 44)



3 lt/ cycle

Water supply pressure




bar (PSI) 3-5 (44-72)

Lower/ wash upper wash system with stainless jets




Upper and lower


Fronte/Front

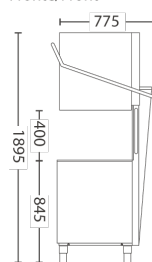

Lato/Side

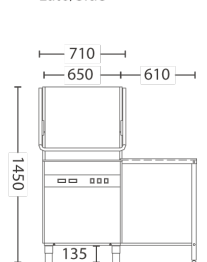

Dietro/Back

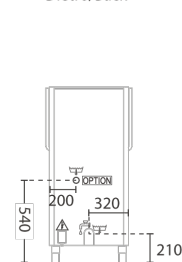

INCLUDED



Detergent pump



Electrical rinse-aid pump

STANDARD BASKET



For more information, see the Basket and Accessories section.