univer bar

# HIGH QUALITY

## DISHWASHING MACHINES

# *PLUS*
# *LINE*

*I prodotti della **PLUS Line Univerbar** si contraddistinguono per la **pulsantiera elettronica** che permette al cliente di avere una macchina tarata ad hoc:*

- ***5 tempi di lavaggio** personalizzabili,*
- *doppio display per la visualizzazione delle temperature,*
- ***pulsante** principale che **cambia colorazione** in base allo step di lavaggio*
- ***21 parametri personalizzabili** a disposizione del tecnico per garantire sempre il corretto set-up.*

*All'interno dei prodotti della PLUS Line è installato il **dosatore brillantante elettrico** che garantisce un'asciugatura di qualità ad ogni ciclo di lavaggio.*

*I prodotti PLUS includono la funzione soft start che elimina gli sbuffi di vapore che potrebbero fuoriuscire dallo sportello all'avvio del lavaggio.*
*Inoltre, la **funzione ecoboiler** aiuta a ridurre i consumi elettrici.*
*Questi prodotti possono vantare anche altri optional aggiuntivi, tra i quali: un **thermostop**, che assicura un risciacquo caldo a 85° C (185 °F).*

*Products from **Univerbar's PLUS Line** stand out for **electronic touch buttons** which allow the client to customise settings:*

- *there are **5 washing times** to choose from, a double display that shows the temperature,*
- *main **switch** that **changes colour** according to the washing phase*
- *There are also **21 different tailored** parameters that technicians can program to guarantee a consistently correct set-up.*

*PLUS Line products come with an **electric rinse-aid pump** which guarantees the best quality drying results for every washing cycle.*

*PLUS products include a soft start function, which prevents steam from escaping from the door when washing starts. Furthermore, the **eco-friendly hot water** option helps reduce electric consumption. These products could also feature optional accessories, including: a **thermal-stop** option, which insures an 85° C (185 °F) hot rinse.*

LEGGENDA

# EASY FRONT ACCESS TO ALL PARTS

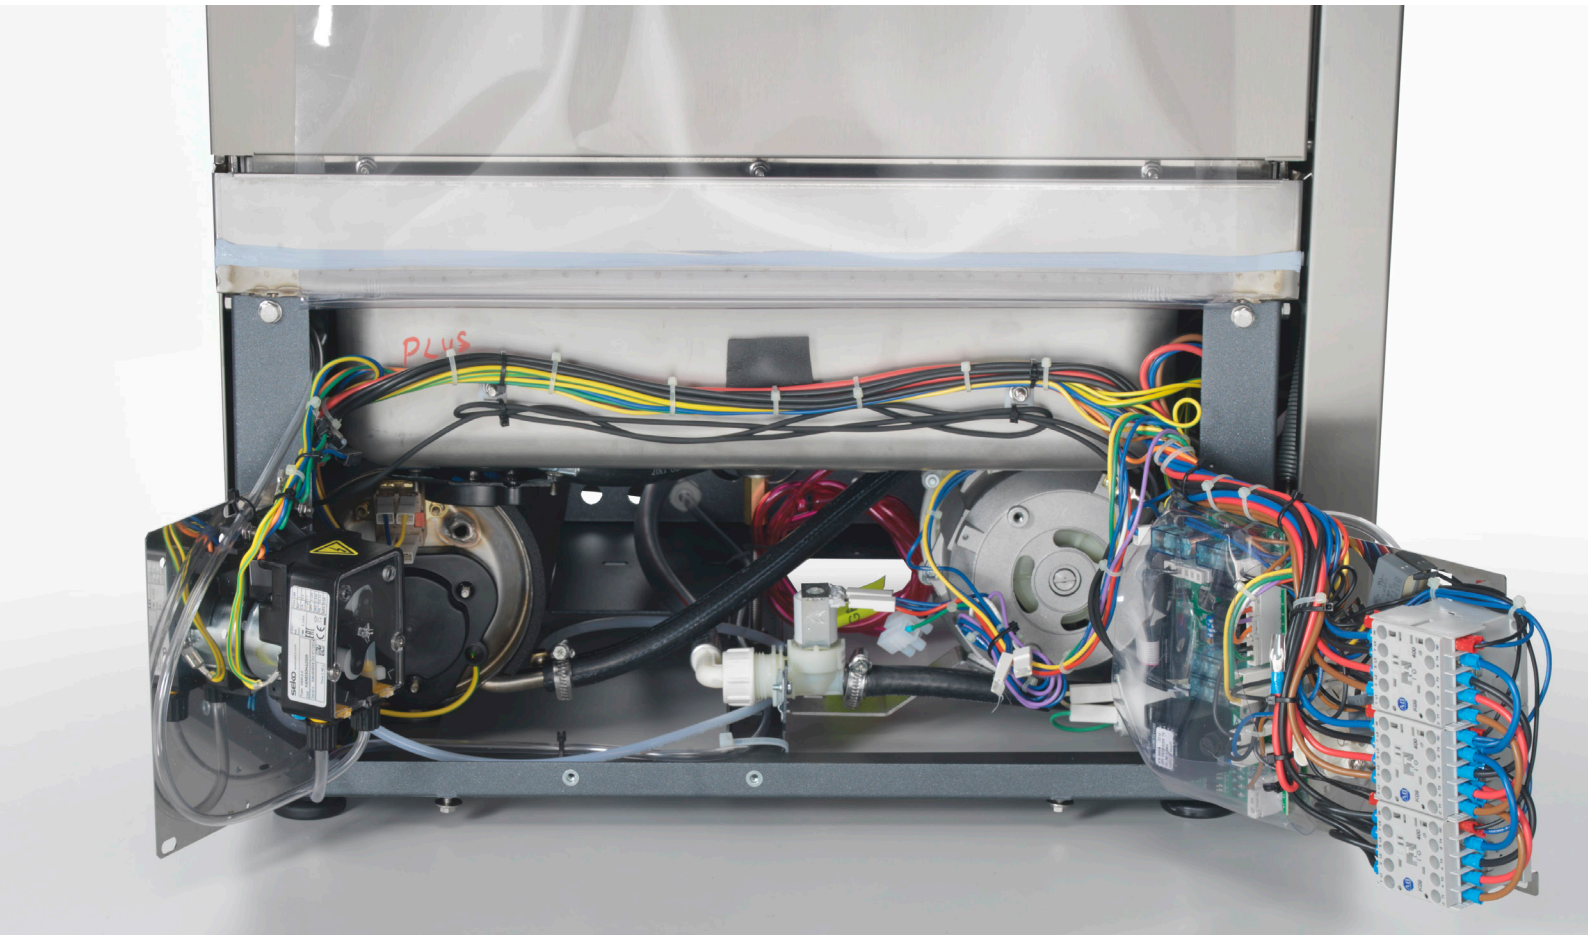


| DI SERIE | STANDARD | STANDARD | STANDARD | ESTÁNDAR |
|---|---|---|---|---|
| Manutenzione facilitata | Easy maintenance | Erleichterte Wartung | Maintenance facilitée | Mantenimiento facilitado |
| Dosatore brillantante elettrico | Elettrical rinse-aid pump | Elektrischer Klarspülmitteldosierung | Doseur produit de rinçage électrique | Dosificador de abrillantado electrico |
| KIT installazione con tubi e piedini. | Installation kit with tubes and feet. | Installation kit with tubes and feet. | Installation kit with tubes and feet. | Installation kit with tubes and feet. |
| Temperature regolabili | Adjustable temperatures | Einstellbare Temperaturen | Températures réglables | Temperaturas ajustables |
| Allaccia acqua calda | Hot-water connection | Warmwasseranschluss | Raccordement à l'eau chaude | Conexión de agua caliente |
| Doppio display digitale | Double digital display | Doppelte Digitalanzeige | Double affichage numérique | Doble pantalla digital |
| Personalizzazione parametri | Parameter Customization | Anpassung der Parameter | Personnalisation des paramètres | Personalización de parámetros |
| Partenza graduale | Soft Start | Schrittweiser Start | Démarrage graduel | Inicio gradual |

# PLUS LINE

| IT | EN | DE | FR | ES |
|---|---|---|---|---|
| CARATTERISTICHE TECNICHE | TECHNICAL FEATURES | TECHNISCHE MERKMALE | CARACTÉRISTIQUES TECHNIQUES | CARACTERÍSTICAS TECNICAS |
| Alimentazione Elettrica | Electrical supply | Elektroanschluß | Tension d'alimentation | Alimentación eléctrica |
| Resistenza Boiler | Boiler heating element | Boilerheizung | Résistance boiler | Resistencia boyler |
| Resistenza Vasca | Tank heating element | Beckenheizung | Résistance de la cuve | Resistencia cuba |
| Elettropompa | Wash pump | Umwälzpumpe | Pompe de lavage | Electrobomba |
| Capacità Boiler | Boiler capacity | Boilerinhalt | Capacité du boiler | Capacidad en boyler |
| Capacità Vasca | Tank capacity | Tankinhalt | Capacité de la cuve | Capacidad en cuba |
| Consumo acqua 3 bar | Water use at 3 bar | Wasserverbrauch bei 3 bar | Consommation eau a 3 bar | Consumo agua 3 bar |
| Pressione acqua alimentazione | Water supply pressure | Fließwasserdruck | Pression eau d'alimentation | Presiòn agua alimentaciòn |
| Doppia parete | Double wall | Doppelte Wand | Double paroi | Doble pared |
| Sistema lavaggio inferiore e superiore con getti inox | Lower wash system and upper wash system with stainless jets | Untere Waschanlage und obere Waschanlage mit Edelstahldüsen | Système de lavage inférieur et système de lavage supérieur avec jets en acier inoxydable | Sistema de lavado inferior y sistema de lavado superior con chorros de acero inoxidable |

# BET 40 S PLUS

## STRENGTHS

1 **DEEP DRAWN TANK**
2 **FRONT ACCESSIBILITY**
3 **EASY MAINTENANCE**
4 **PERSONALIZED FUNCTIONS**
5 **DOUBLE DISPLAY WITH TEMPERATURES VIEW**
6 **ELECTRIC DETERGENT AND RINSE-AID PUMP**

## MAIN FEATURES

| | |
|---|---|
| 5 | Washing cycle times to choose from<br>70/ 120/ 180/ 240/ 300 seconds |
| 3,25 Kw | Consumption Kw/h times |
| 29 cm | Washing height ( 11,4 in ) |
| 40 cm | Basket size ( 15,7 in ) |

## Technical features/ *Características tecnicas*

| | |
|---|---|
| Electrical supply | 230V/ 50-60 Hz/1-ph |
| Boiler heating element | W 3000 |
| Tank heating element | W 2000 |
| Double wall | Partial |
| Wash pump | Hp 0,20 |
| Boiler capacity | 4 lt |
| Tank capacity | 6.5 lt |
| Water use at 3 bar (PSI 44) | 3 lt/ cycle |
| Water supply pressure | bar ( PSI ) 3-5 (44-72) |
| Lower/ wash upper wash system with stainless jets | Lower |

Fronte/Front




Lato/Side




Dietro/Back




## INCLUDED

- *Built-in drain pump*
- *Elettrical rinse-aid pump*
- *Detergent pump*

## STANDARD BASKET



*For more information, see the Basket and Accessories section.*

# LOGOS 22 PLUS 230

## STRENGTHS

1 **DEEP DRAWN TANK AND INSULATED BOILER**
2 **FRONT ACCESSIBILIT**
3 **EASY MAINTENANCE**
4 **PERSONALIZED FUNCTIONS**
5 **DOUBLE DISPLAY WITH TEMPERATURES VIEW**
6 **ELECTRIC DETERGENT AND RINSE-AID PUMP**
7 **DOUBLE WALL - FULL**

## MAIN FEATURES

| | |
|---|---|
| 5 | Washing cycle times to choose from<br>70/ 120/ 180/ 240/ 300 seconds |
| 3,9 Kw | Consumption Kw/h times |
| 35 cm | Washing height ( 13,4 in ) |
| 50 cm | Basket size (19,7 in) |

## Technical features/ *Características tecnicas*

| | |
|---|---|
| Electrical supply | 230V/ 50-60 Hz/1-ph |
| Boiler heating element | W 3000 |
| Tank heating element | W 2000 |
| Double wall | Total |
| Wash pump | Hp 1 |
| Boiler capacity | 6 lt |
| Tank capacity | 21 lt |
| Water use at 3 bar (PSI 44) | 3 lt/ cycle |
| Water supply pressure | bar ( PSI ) 3-5 (44-72) |
| Lower/ wash upper wash system with stainless jets | Upper and lower |

Fronte/Front




Lato/Side




Dietro/Back




## INCLUDED

- *Built-in drain pump*
- *Elettrical rinse-aid pump*
- *Detergent pump*

## STANDARD BASKET



*For more information, see the Basket and Accessories section.*

# COMPACT PLUS

## STRENGTHS

1 **DEEP DRAWN TANK**
2 **FRONT ACCESSIBILITY**
3 **EASY MAINTENANCE**
4 **PERSONALIZED FUNCTIONS**
5 **DOUBLE DISPLAY WITH TEMPERATURES VIEW**
6 **ELECTRIC DETERGENT AND RINSE-AID PUMP**
7 **WASHTANK FILTER**

## MAIN FEATURES

| | |
|---|---|
| 5 | Washing cycle times to choose from<br>70/ 120/ 180/ 240/ 300 seconds |
| 7 Kw | Consumption Kw/h times |
| 40 cm | Washing height ( 15,7 in ) |
| 50 cm | Basket size (19,7 in) |

## Technical features/ *Características tecnicas*

| | |
|---|---|
| Electrical supply | 230V/ 50-60 Hz/ 1-ph |
| Boiler heating element | W 6000 |
| Tank heating element | W 3000 |
| Double wall | Partial |
| Wash pump | Hp 1,2 |
| Boiler capacity | 6 lt |
| Tank capacity | 27 lt |
| Water use at 3 bar (PSI 44) | 3 lt/ cycle |
| Water supply pressure | bar ( PSI ) 3-5 (44-72) |
| Lower/ wash upper wash system with stainless jets | Upper and lower |

Fronte/Front




Lato/Side




Dietro/Back




## INCLUDED

*Detergent pump*

*Elettrical rinse-aid pump*

## STANDARD BASKET



*For more information, see the Basket and Accessories section.*